




△ Recommended P.C.B. Layout

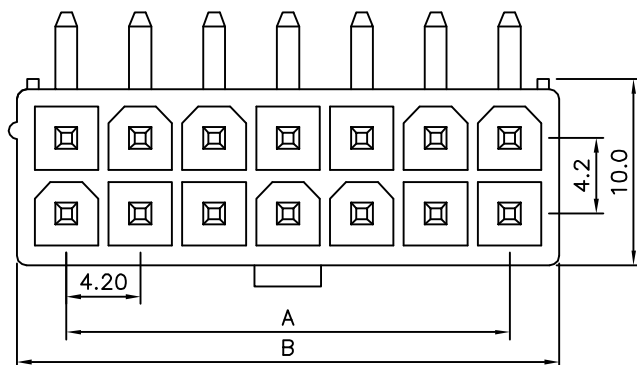

△

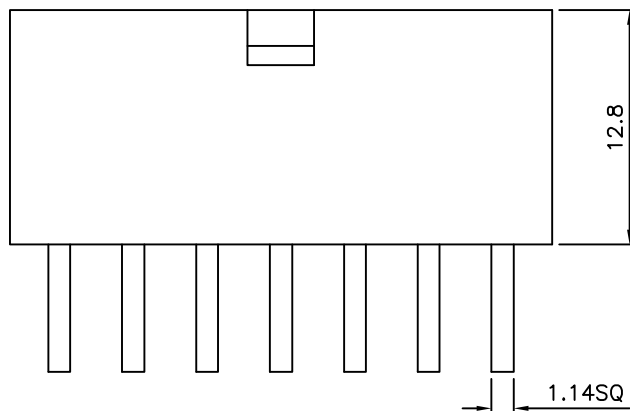

△

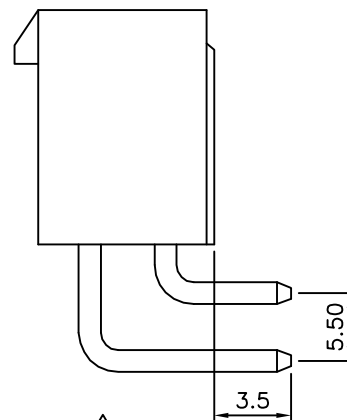

△

△ SPECIFICATION

Current Rating:8A AC/DC
Voltage Rating:500V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-2),Nature
Contact:Brass,Tin Plated
Applicable PC Board Thickness:1.6mm
RoHS Compliant

△ Pin	A	B
02	4.20	5.2
04	8.40	9.4
06	12.60	13.6
08	16.80	17.8
10	21.00	22.0
12	25.20	26.2
14	29.40	30.4
16	33.60	34.6
18	37.80	38.8
20	42.00	43.0
22	46.20	47.2
24	50.40	51.4

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02279

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.5
X ±0.25
.XX ±0.2
.XXX ±0.08

UNIT
mm



△

NO.

REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

HZF

CHK

DATE

11/25/2014

DATE