

SPECIFICATION

1. General Characteristics

3.0mm Micro Fit 2XXX Plug Black
2. Material&Finish

Housing:PA66(UL94V-0),Black
3. Electrical Characteristics



Current Rating:3A AC/DC

Voltage Rating:250V AC/DC



Withstand Voltage:1500V AC/Minute

Insulation Resistance:1000 Megaohms Min.
4. Environmental Characteristics

Temperature Range:-25°C~+85°C
5. RoHS Compliant

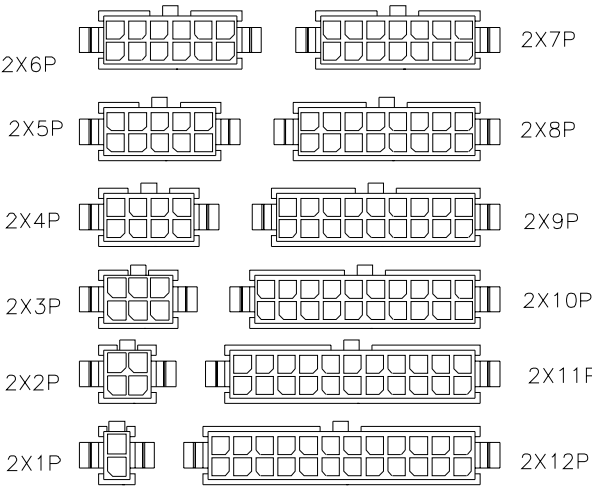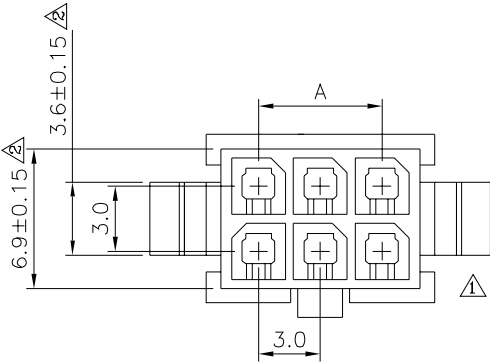

△

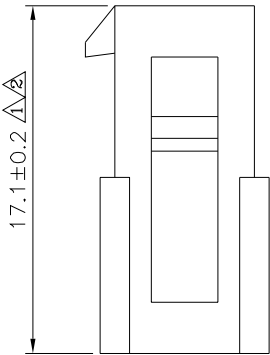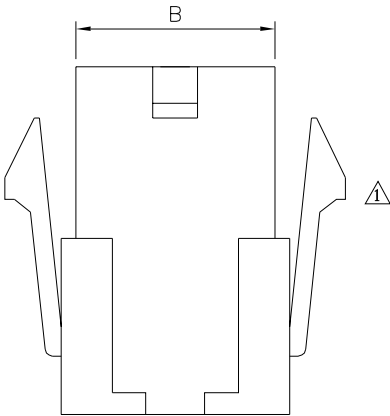

△Dim. A,B Tolerance As Follow:

Pin	A	B
2~8	±0.15	±0.20
10~16	±0.25	±0.30
18~24	±0.35	±0.40

Pin	A	B
2	-	3.8
4	3.0	6.8
6	6.0	9.8
8	9.0	12.8
10	12.0	15.8
12	15.0	18.8
14	18.0	21.8
16	21.0	24.8
18	24.0	27.8
20	27.0	30.8
22	30.0	33.8
24	33.0	36.8

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

02592

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X ±0.5
XX ±0.25
.XXX ±0.08

UNIT
mm



△

A2

Modify Data

HZF

06/07/2017

△

A1

Modify Data

HZF

11/30/2009

△

A0

NEW RELEASE

NO.REV.

REVISIONS

CHK

DATE