



△△ SPECIFICATION


- 1.General Characteristics**
3.0mm Micro-Fit Receptacle Housing 2XXX
Black Insulator
- 2.Material&Finish**
△ Housing:PA66(UL94V-0),Black
- 3.Electrical Characteristics**
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
- 4.Environmental Characteristics**
Temperature Range:-25°C~+85°C
- 5.RoHS Compliant**




△△




△△

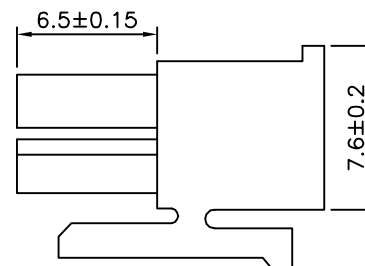

△ 02~04 Pin

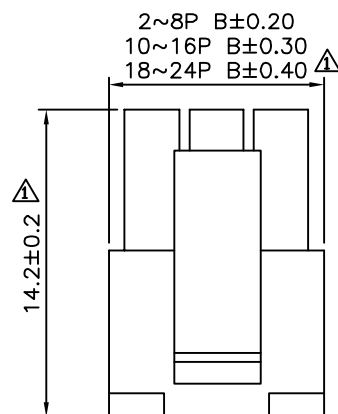

△

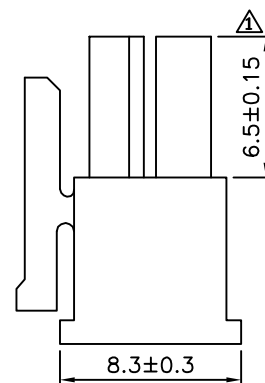

△ 06~24 Pin

△

Pin	A	B
02	--	3.85
04	3.0	6.85
06	6.0	9.85
08	9.0	12.85
10	12.0	15.85
12	15.0	18.85
14	18.0	21.85
16	21.0	24.95
18	24.0	27.95
20	27.0	30.95
22	30.0	33.95
24	33.0	36.95

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02595

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.5
X ±0.25
.XX ±0.2
.XXX ±0.08

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	09/16/2014
△	A2	Modify Data	HZF	05/20/2013
△	A1	Modify Data	HZF	11/30/2009
△	A0	NEW RELEASE		