

△△ SPECIFICATION

△ 1.General Characteristics

3.0mm Micro-Fit Receptacle Housing 2XXX
Black Insulator

△ 2.Material&Finish

△ Housing:PA66(UL94V-0),Black


△ 3.Electrical Characteristics

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute


△ 4.Environmental Characteristics

Temperature Range:-25°C~+85°C


△ 5.RoHS Compliant




△△




△△

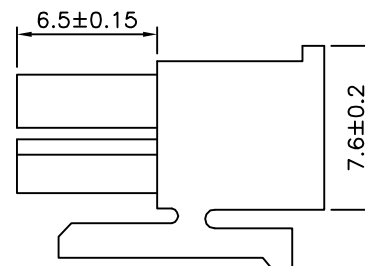

△ 02~04 Pin

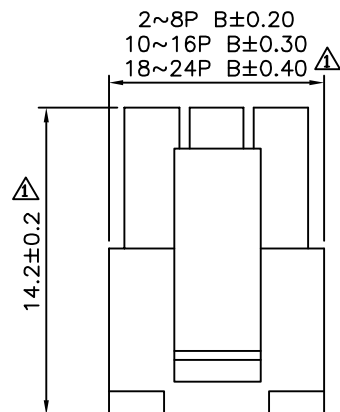

△

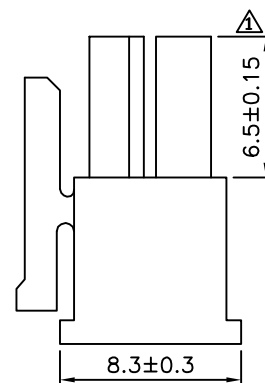

△ 06~24 Pin

△

Pin	A	B
02	--	3.85
04	3.0	6.85
06	6.0	9.85
08	9.0	12.85
10	12.0	15.85
12	15.0	18.85
14	18.0	21.85
16	21.0	24.95
18	24.0	27.95
20	27.0	30.95
22	30.0	33.95
24	33.0	36.95

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02602

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X. ±0.5
△ X ±0.25
△ .XX ±0.2
△ .XXX ±0.08

UNIT
mm



△ A3

Modify Data

HZF

09/16/2014

△ A2

Modify Data

HZF

05/20/2013

△ A1

Modify Data

HZF

11/30/2009

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE