File No.	371	SHEET	1 /1

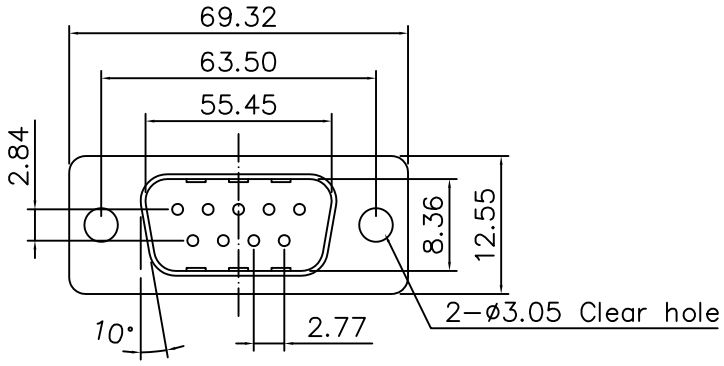

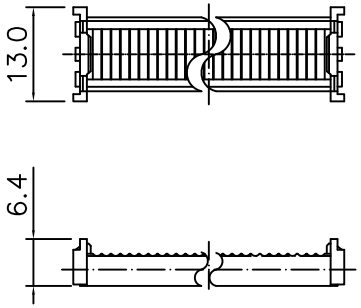

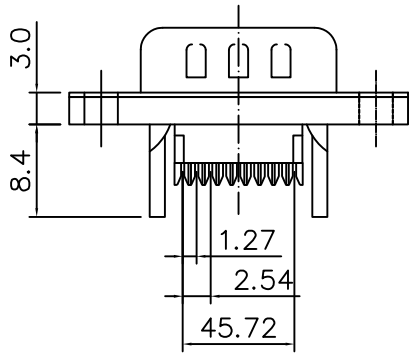



SPECIFICATIONS
Current Rating:1 AMP
Dielectric Withstanding Voltage:
AC 500V For 1 Minute
Contact Resistance:30 Milliohms Max.
At DC 100mA
Insulator Resistance:1000Megohms Min.
At DC 500V
Operating Temperature:−55°C To +105°C
Single Contact Insertion Force:500g Max.
Single Contact Withdrawal Force:30g Min.
Contact:Brass
Housing:PBT &30% Glass Fiber UL 94V−0

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
03026	MEI	.X ±0.1			
	CHECKED BY SHIN	.XX ±0.05			
	DRAWING BY INGRID	.XXX			
SCALE NONE	REV. A0	UNIT mm	NO.	REV.	REVISIONS / CHK / DATE
			0	A0	NEW RELEASE SHIN 08/13/2007