





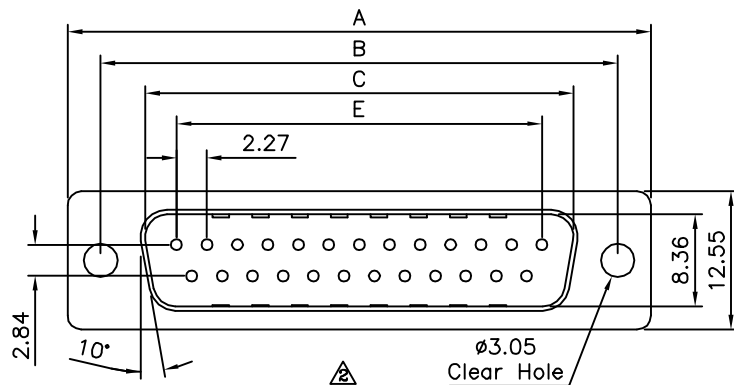


# △ SPECIFICATION


Current Rating:3 Amp  
 Voltage Rating:250V AC/RMS 60 Hz  
 Dielectric Withstanding Voltage:  
 1000V AC/RMS 60 Hz For 1 Minute  
 Contact Resistance:20 Milliohms Max. At 1 Amp DC  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Insulator:PBT+G.F.(UL94V-O),Blue  
 Contact:Brass,Selective Glod Flash Over Nickel  
 Shell:Steel,Tin Plated Over Copper  
 RoHS Compliant

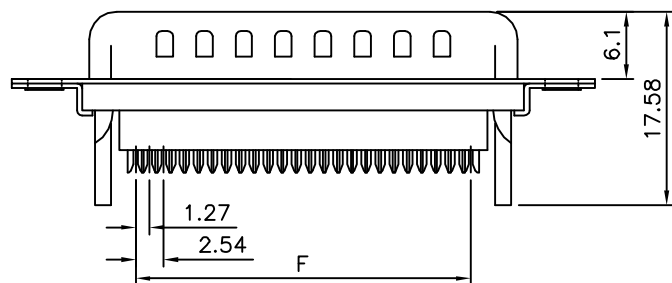

△ Without Insulator Support

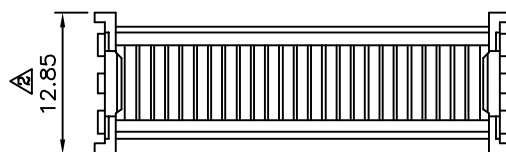

Cover

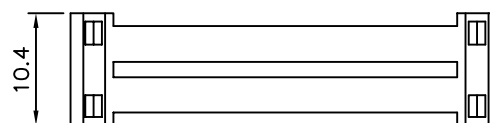

△ Strain Relief

△

| Pos. | A     | B     | C     | E     | F     |
|------|-------|-------|-------|-------|-------|
| 09   | 30.81 | 24.99 | 16.92 | 11.08 | 10.16 |
| 15   | 39.20 | 33.30 | 25.25 | 19.39 | 17.78 |
| 25   | 53.05 | 47.04 | 38.96 | 33.24 | 30.48 |
| 37   | 69.40 | 63.50 | 55.42 | 49.86 | 45.72 |

DRAWING No.

03032

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HTP

SCALE

NONE

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


△ X. ±0.38 X.\* ±3\*

△ X ±0.25 .X\* ±1\*

△ XX ±0.13

UNIT

mm



NO.REV.

REVISIONS

CHK

DATE

**4UCON**元化興業股份有限公司  
 4UCON TECHNOLOGY INC.