




SPECIFICATIONS


Current Rating:3 AMP
 Volatge Rating:250 VAC/rms 60Hz
 Contact Resistance:20 Milliohms
 Max At 1 AMP DC.
 Insulation Resistance:1000 Megohm
 At 500 V DC
 Dielectric Withstanding Voltage:
 1000 VAC/rms 60Hz For 1 Minute
 Insulator:Glass-Filled Thermoplastic PBT,UL94V-0
 Contact:Copper alloy
 Shell:Steel,Tin Over Copper
 RoHS Compliant

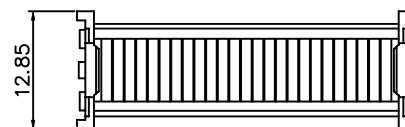


Cover

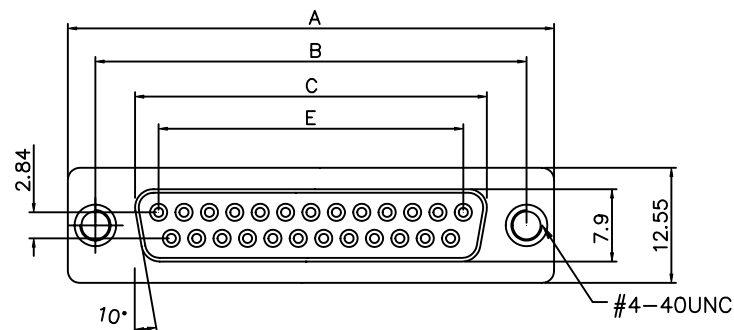

Strain Relief

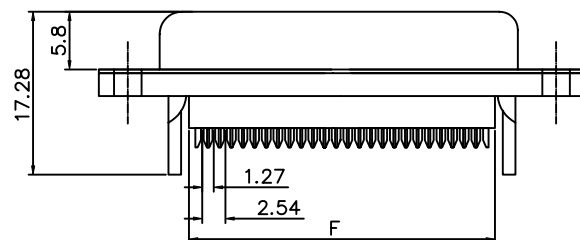

With Insulator Support



Positions	A	B	C	E	F
9	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.70	19.39	17.78
25	53.05	47.04	38.40	33.24	30.48
37	69.40	63.50	54.80	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03059

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

REV.

B0


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.38 X* $\pm 3^{\circ}$

.X ± 0.25 .X* $\pm 1.0^{\circ}$

.XX ± 0.13

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

B0

NEW RELEASE

HZF

05/13/2008