
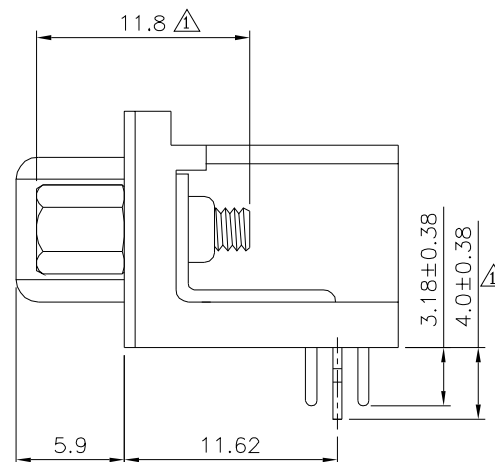
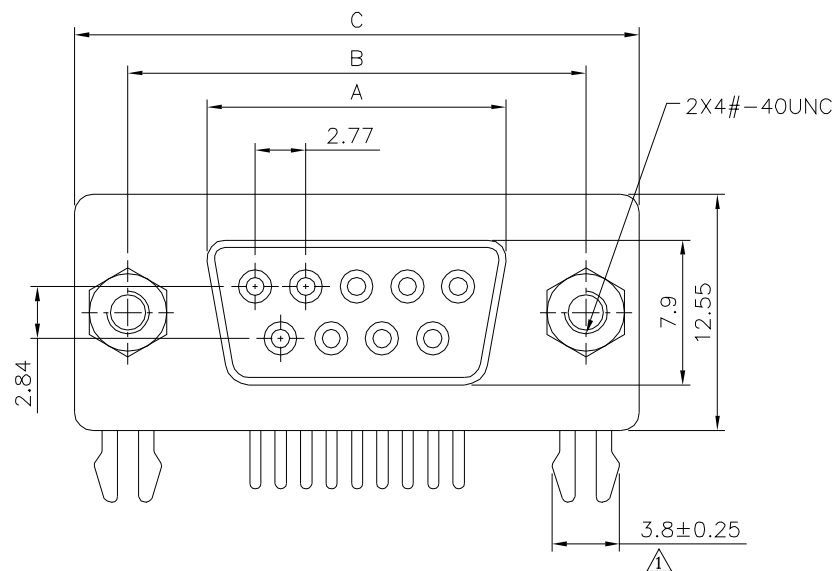
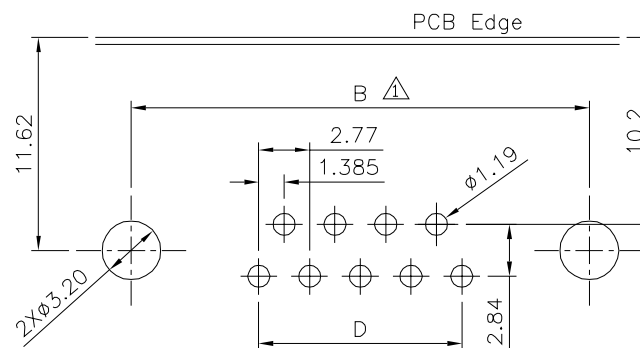


SPECIFICATION

Current Rating:5 Amp
 Withstand Voltage:1000V Per 1 Minute
 Contact Resistance:15 Milliohms Max. 10Sec.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+25%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Grounding:SPCC,Tin Plated
 Shell:SPCC,Nickel Plated
 Screw:SPCC,Nickel Plated
 RoHS Compliant

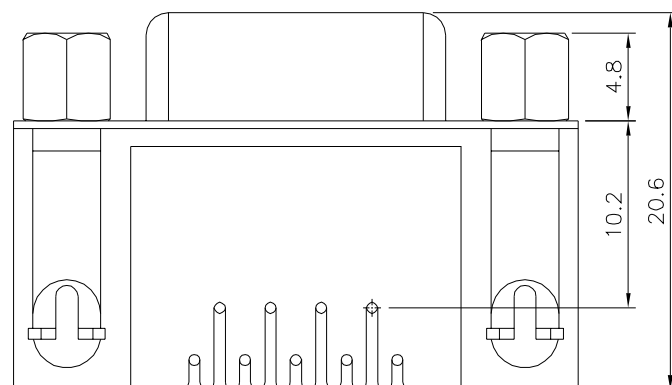

Recommended P.C.B. Layout

Pin	A±0.20	B±0.25	C±0.38	D
9	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.△

03116

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△.X ±0.25 ANG. ±1°
 .XX ±0.15 Radius±0.25
 .XXX ±0.05 Hole ±0.13

UNIT
 mm



△A3

Modify Data

HZF

02/14/2019

△A2

Modify Data

HZF

05/06/2016

△A1

Modify Data

HZF

12/06/2011

△A0

NEW RELEASE

HZF

06/09/2009

NO.REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A3