


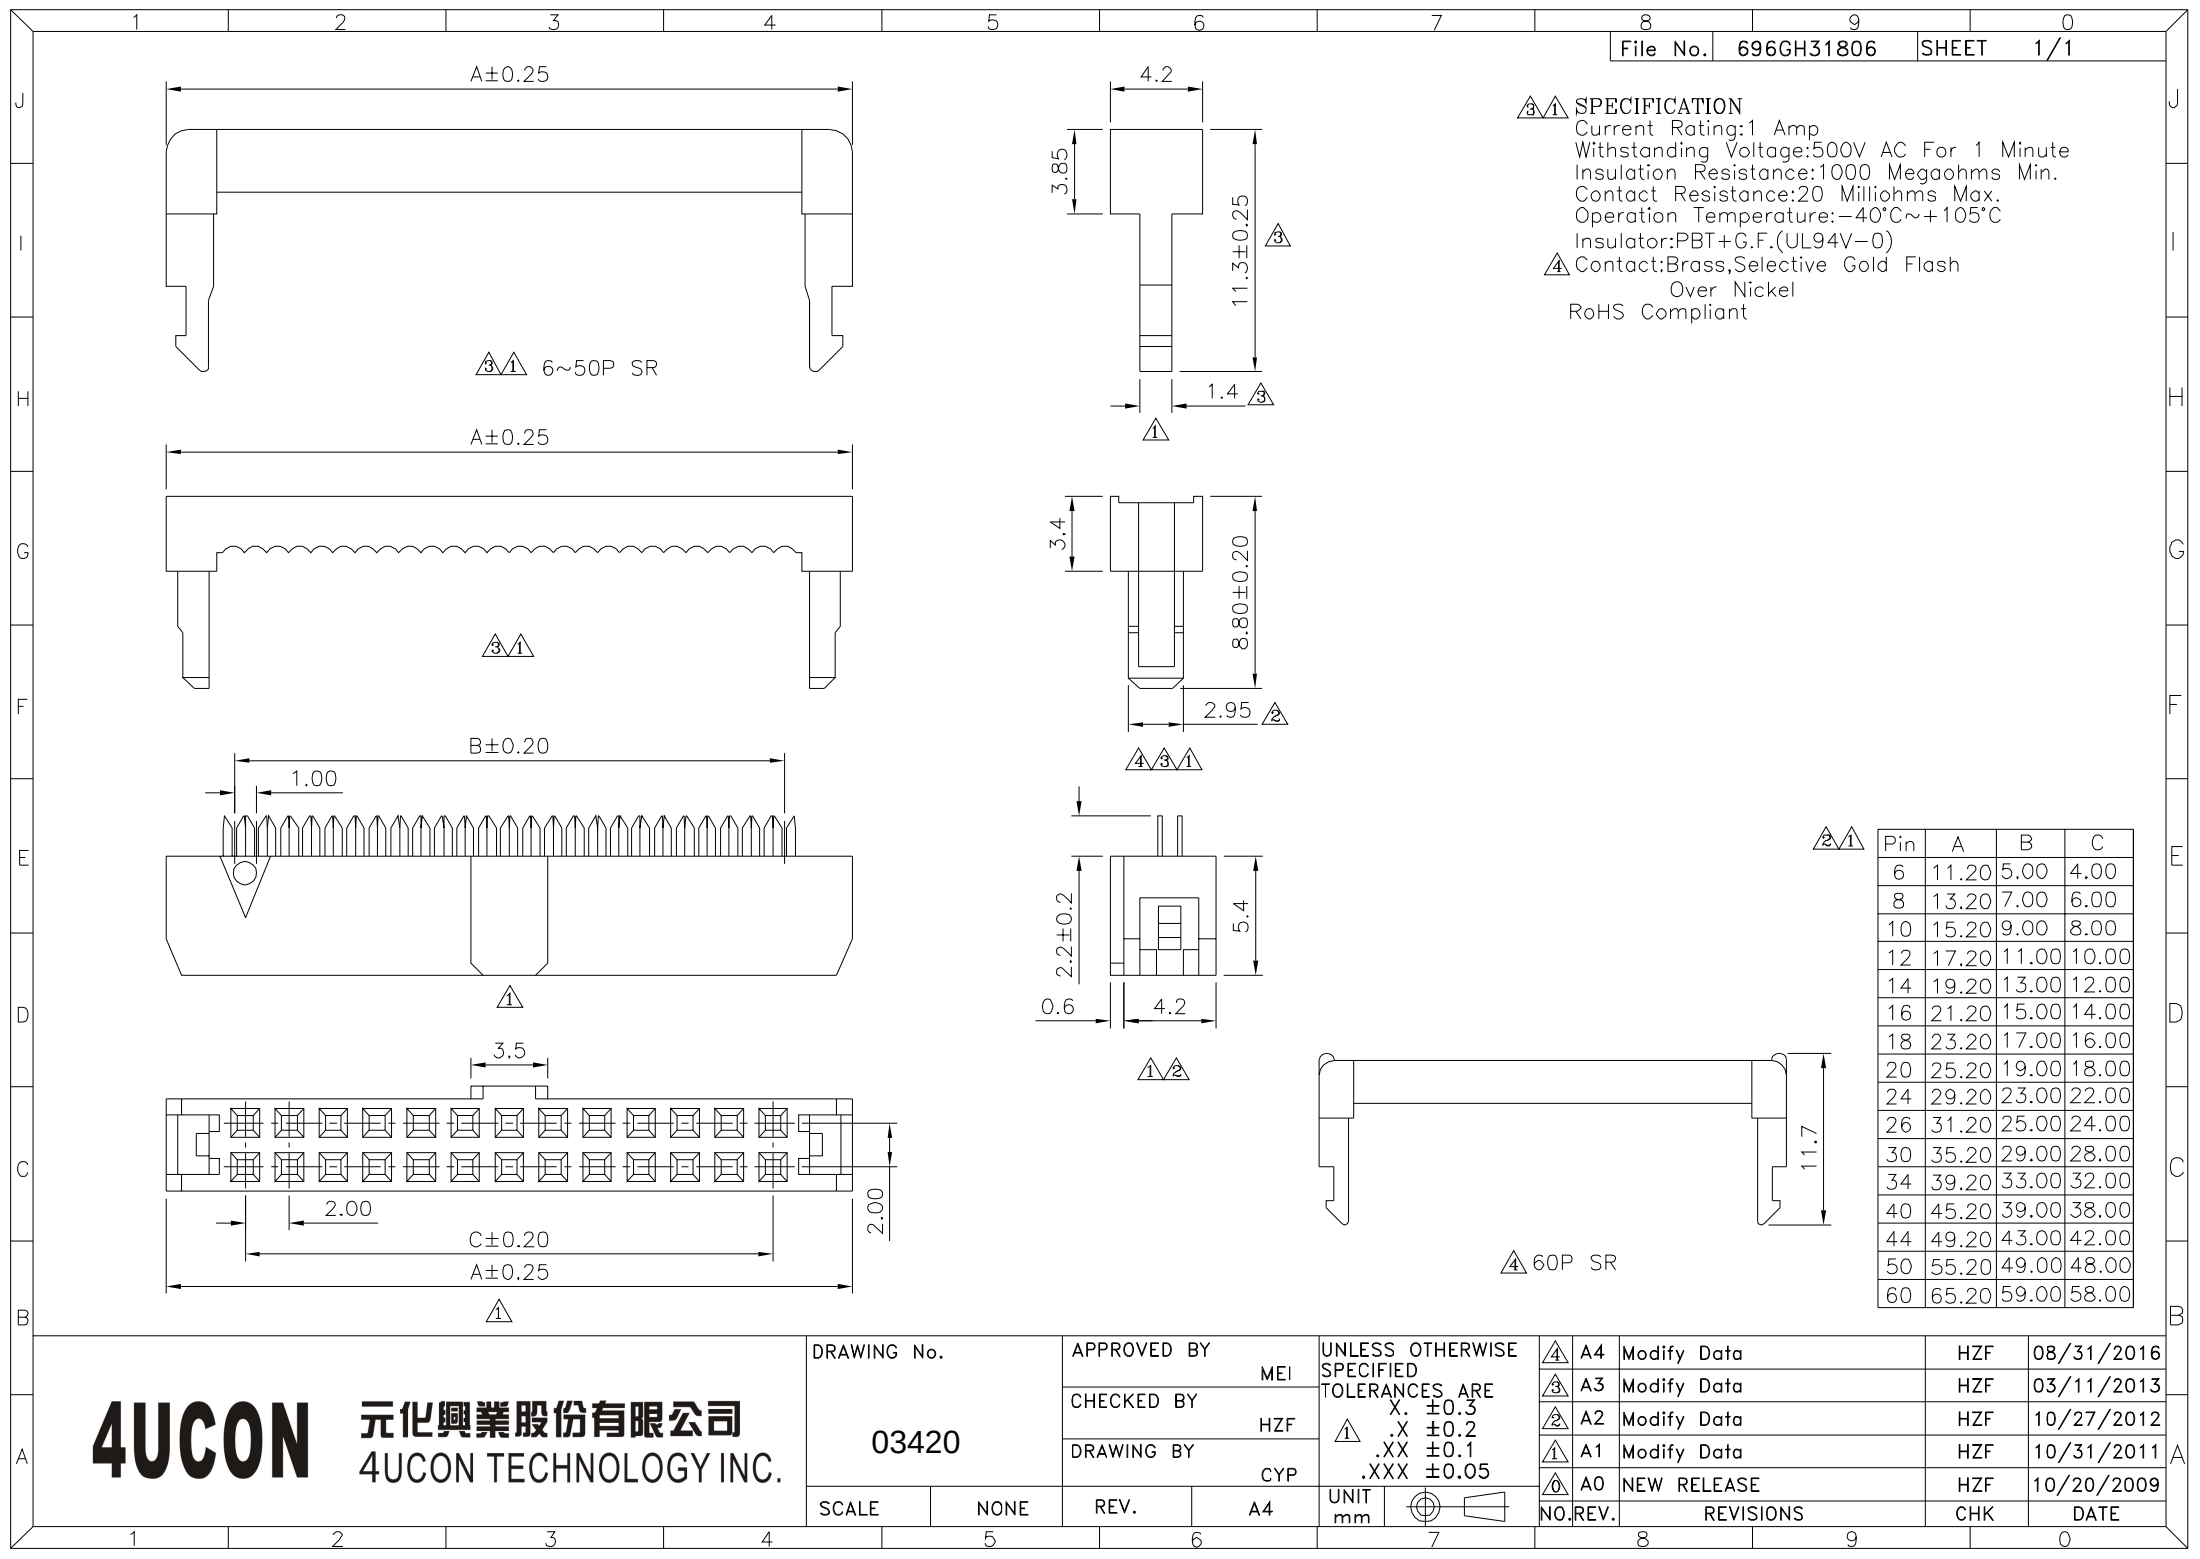

△△ SPECIFICATION
Current Rating:1 Amp
Withstanding Voltage:500V AC For 1 Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:−40°C~+105°C
Insulator:PBT+G.F.(UL94V−0)
△ Contact:Brass,Selective Gold Flash
Over Nickel
RoHS Compliant

△△	Pin	A	B	C
	6	11.20	5.00	4.00
	8	13.20	7.00	6.00
	10	15.20	9.00	8.00
	12	17.20	11.00	10.00
	14	19.20	13.00	12.00
	16	21.20	15.00	14.00
	18	23.20	17.00	16.00
	20	25.20	19.00	18.00
	24	29.20	23.00	22.00
	26	31.20	25.00	24.00
	30	35.20	29.00	28.00
	34	39.20	33.00	32.00
	40	45.20	39.00	38.00
	44	49.20	43.00	42.00
	50	55.20	49.00	48.00
	60	65.20	59.00	58.00

4UCON 元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
03420		DRAWING BY	CYP
SCALE	NONE	REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		△	X. ±0.3
		△	.X ±0.2
		△	.XX ±0.1
		△	.XXX ±0.05
		UNIT	mm

△	A4	Modify Data	HZF	08/31/2016
△	A3	Modify Data	HZF	03/11/2013
△	A2	Modify Data	HZF	10/27/2012
△	A1	Modify Data	HZF	10/31/2011
△	A0	NEW RELEASE	HZF	10/20/2009
NO. REV.	REVISIONS		CHK	DATE