

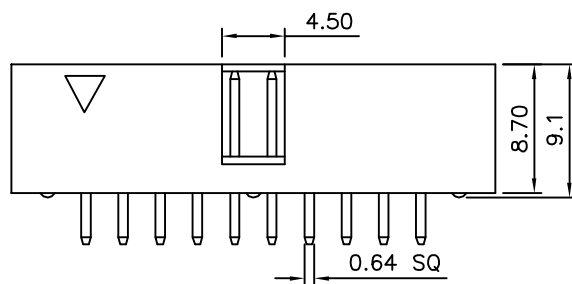


Recommended P.C.B. Layout

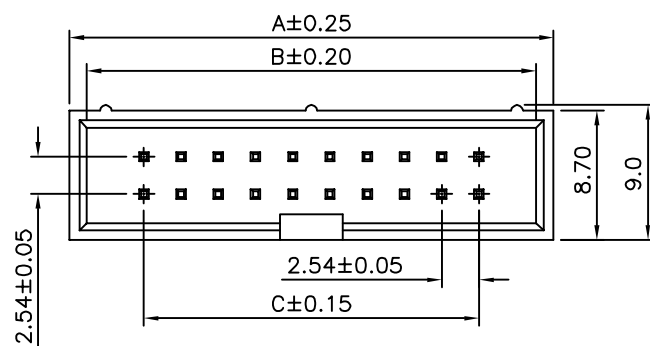

SPECIFICATION

Current Rating:1 Amp
 Withstand Voltage:500V For One Minute
 Insulation Resistance:1000 Megaohms
 At 500V DC
 Operation Temperature:−55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V−0),Black
 Contact:Brass,Gold Plated Over Nickel
 RoHS Compliant

Pin	A	B	C
10	20.32	18.00	10.16
14	25.40	23.08	15.24
16	27.94	25.62	17.78
20	33.02	30.70	22.86
24	38.10	35.78	27.94
26	40.64	38.32	30.48
30	45.72	43.40	35.56
34	50.80	48.48	40.64
40	58.42	56.10	48.26
50	71.12	68.80	60.96
60	83.82	81.50	73.66
64	88.90	86.58	78.74

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03572

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

B1

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.25

.X ±0.20

.XX ±0.10

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	02/18/2013
△	B0	NEW RELEASE	HZF	05/07/2010