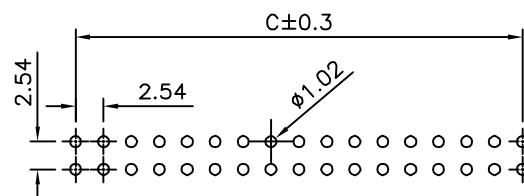
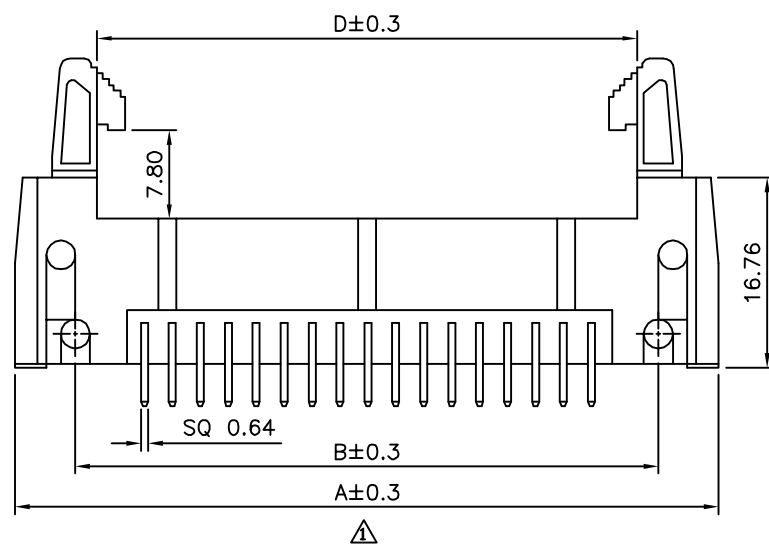
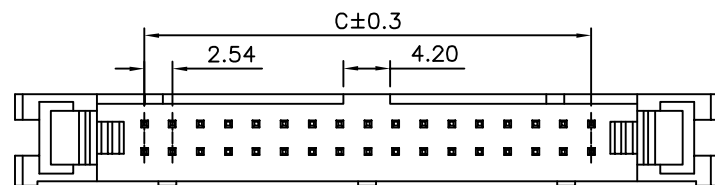
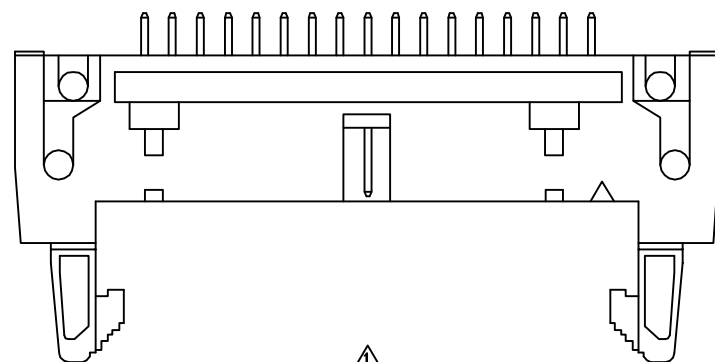

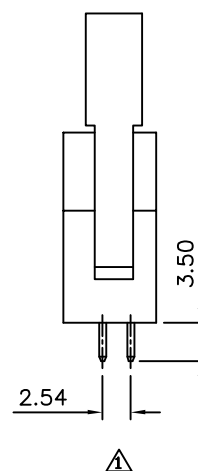


△ SPECIFICATION

Current Rating:1.5 Amp
Dielectric Withstanding Voltage:500V AC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

**△ Recommended P.C.B. Layout****△ New Ejector**

Pin	A	B	C	D
10	32.00	21.84	10.16	17.96
14	37.08	26.92	15.24	23.04
16	39.62	29.46	17.78	25.58
20	44.70	34.54	22.86	30.33
24	49.78	39.62	27.94	35.74
26	52.32	42.16	30.48	38.28
30	57.40	47.24	35.56	43.36
34	62.48	52.32	40.64	48.44
40	70.10	59.94	48.26	56.06
50	82.80	72.64	60.96	68.76
60	95.50	85.34	73.66	81.46
64	100.58	90.42	78.74	86.54

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03794

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△.X ±0.50 X.* ±2.0°

.XX ±0.20 .X.* ±1.0°

.XXX ±0.10 .XX.* ±0.5°

UNIT
mm

△A2

Modify Data

HZF

04/17/2015

△A1

Modify Data

HZF

11/15/2012

△A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE