
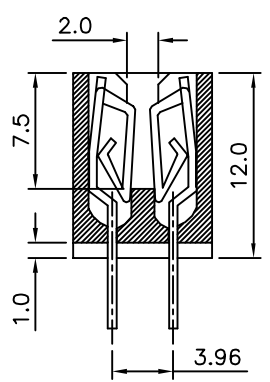
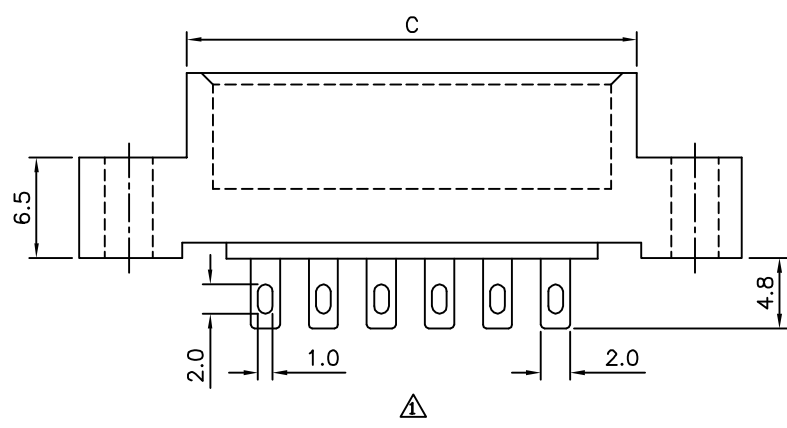


△ SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:500V For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min. At 500V DC
Temperature Range:-40°C~+105°C
Insulator:PBT+30%G.F.(UL94V-0)
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

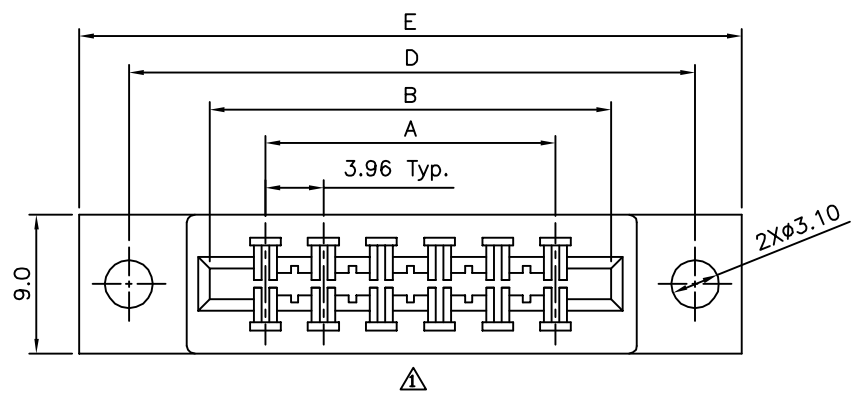

△△	Pin	A	B	C	D	E
	10	15.84	24.06	27.40	34.94	41.24
	12	19.80	28.02	31.36	38.90	45.20
	16	27.72	35.94	39.28	46.82	53.12
	20	35.64	43.86	47.20	54.74	61.04
	22	39.60	47.82	51.16	58.70	65.00
	24	43.56	51.78	55.12	62.66	68.96
	26	47.52	55.74	59.08	66.62	72.92
	30	55.44	63.66	67.00	74.54	80.84
	32	59.40	67.62	70.96	78.50	84.80
	36	67.32	75.54	78.88	86.42	92.72
	40	75.24	83.46	86.80	94.34	100.64
	44	83.16	91.38	94.72	102.26	108.56
△	48	91.08	99.30	102.64	110.18	116.48
	50	95.04	103.26	106.60	114.14	120.44
	56	106.92	115.14	118.48	126.02	132.32
	60	114.84	123.06	126.40	133.94	140.24
	62	118.80	127.02	130.36	137.90	144.20
	64	122.76	130.98	134.32	141.86	148.16
	70	134.64	142.86	146.20	153.74	160.04
	72	138.60	146.82	150.16	157.70	164.00
△	86	166.32	174.54	177.88	185.49	191.48

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 04628		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0~10 ±0.2 100~300 ±0.5 10~30 ±0.3 300~ ±0.6 30~100 ±0.4  ANG. ±0.5							
		EMILY				 A3	Modify Data	HZF	08/10/2013		
		CHECKED BY									
		HZF				 A2	Modify Data	HZF	06/17/2013		
		DRAWING BY									
		SONG				 A1	Modify Data	HZF	10/26/2010		
						 A0	NEW RELEASE				
SCALE	NONE	REV.	A3	UNIT		NO. REV.		REVISIONS		CHK	DATE
5		6		7		8		9		0	