


SPECIFICATION





Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature:-40°C~+85°C
Insulation Resistance:500 Megaohms Min. (Initial)
At 500V DC For 1 Minute
Contact Resistance:20 Milliohms Max.(Initial)
Dielectric Withstanding Voltage:
1000V RMS. At 60Hz,1 Minute Between
Adjacent Contacts
1500V RMS. At 60Hz,1 Minute Between
Shield And Contacts
Housing:PBT(UL94V-0),Black
Contacts:Phosphor Bronze
Gold Plated 06u" Over All,Over Nikcel
Cavity Confirms To FCC Rules And Regulations
Part 68,Subpart F.
RoHS Compliant

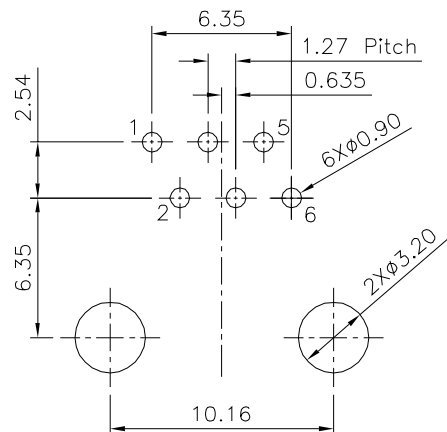

Recommended P.C.B. Layout

Recommended P.C.B. Thickness:1.6mm

Tolerance:±0.05(Top View)

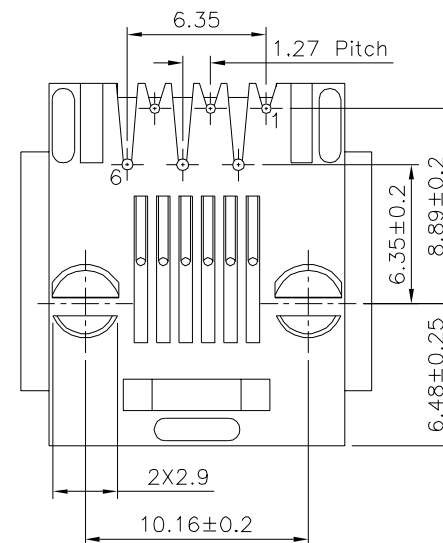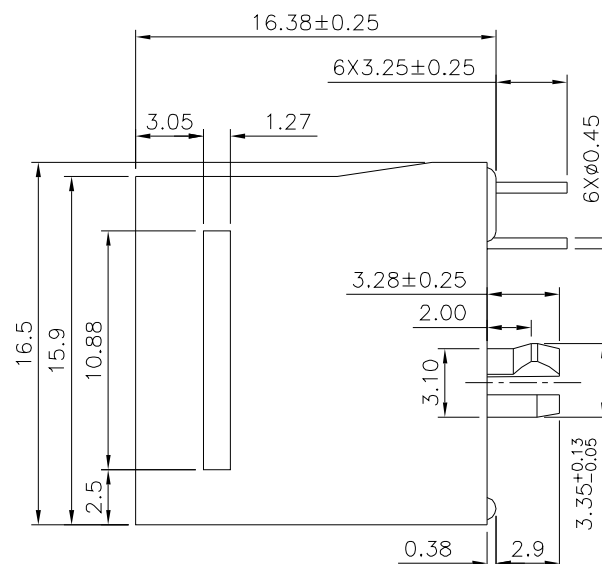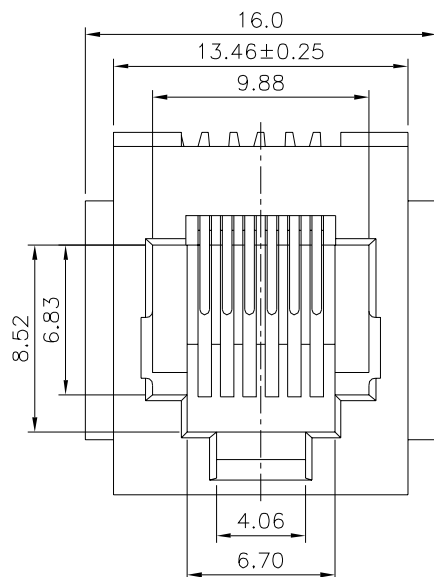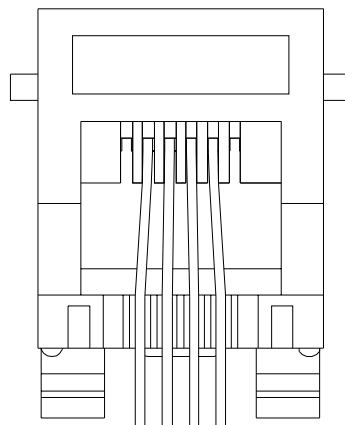

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1

04911

SCALE

NONE

REV.

B1

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.25

.XX ±0.13

.XXX ±0.05

UNIT

mm



NO. REV.

B1 Modify Data

B0 NEW RELEASE

REVISIONS

HZF

HZF

CHK

09/08/2025

10/28/2023

DATE