



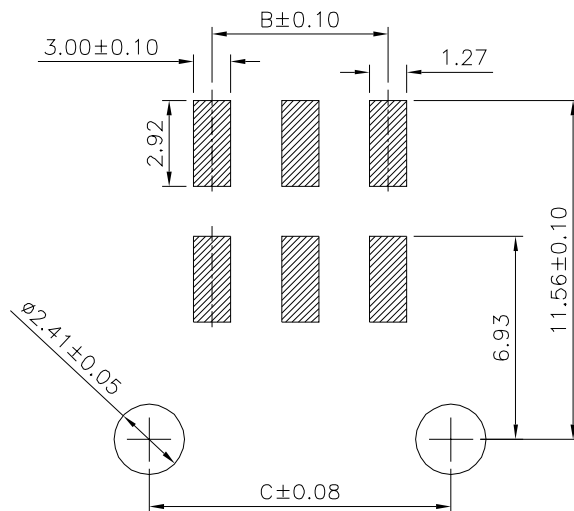

Recommended P.C.B. Layout  
(PCB Board Tolerance  $\pm 0.05$ )

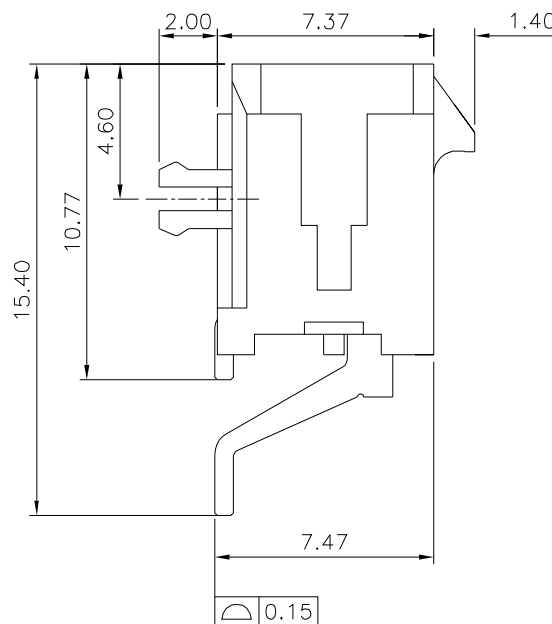

#### 4. RoHS Compliant


| P <sub>in</sub> | A     | B     | C     |
|-----------------|-------|-------|-------|
| 02              | 6.65  | —     | 4.30  |
| 04              | 9.65  | 3.00  | 7.30  |
| 06              | 12.65 | 6.00  | 10.30 |
| 08              | 15.65 | 9.00  | 13.30 |
| 10              | 18.65 | 12.00 | 16.30 |
| 12              | 21.65 | 15.00 | 19.30 |
| 14              | 24.65 | 18.00 | 22.30 |
| 16              | 27.65 | 21.00 | 25.30 |
| 18              | 30.65 | 24.00 | 28.30 |
| 20              | 33.65 | 27.00 | 31.30 |
| 22              | 36.65 | 30.00 | 34.30 |
| 24              | 39.65 | 33.00 | 37.30 |

**元化興業股份有限公司**  
**4UCON TECHNOLOGY INC.**

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|      |               |
|------|---------------|
| .X   | $\pm 0.40$    |
| .XX  | $\pm 0.25$    |
| .XXX | $\pm 0.15$    |
| ANG. | $\pm 3^\circ$ |

|      |    |
|------|----|
| UNIT | mm |
|------|----|



|                                                                                       |    |
|---------------------------------------------------------------------------------------|----|
|  | AO |
| NO. REV.                                                                              |    |

|  |             |
|--|-------------|
|  | NEW RELEASE |
|--|-------------|

REVISIONS

HZF

|            |
|------------|
| 07/28/2020 |
|------------|

|     |      |
|-----|------|
| NO. | REV. |
|-----|------|

REVISIONS

CHK

|  |      |
|--|------|
|  | DATE |
|--|------|