
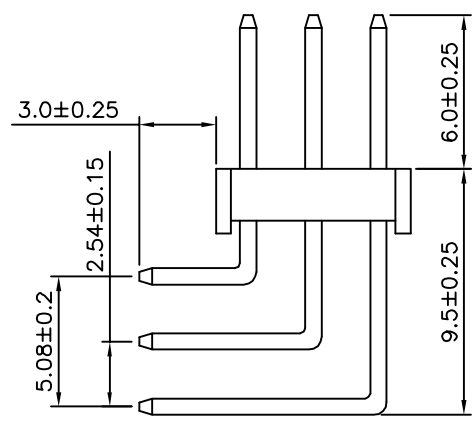
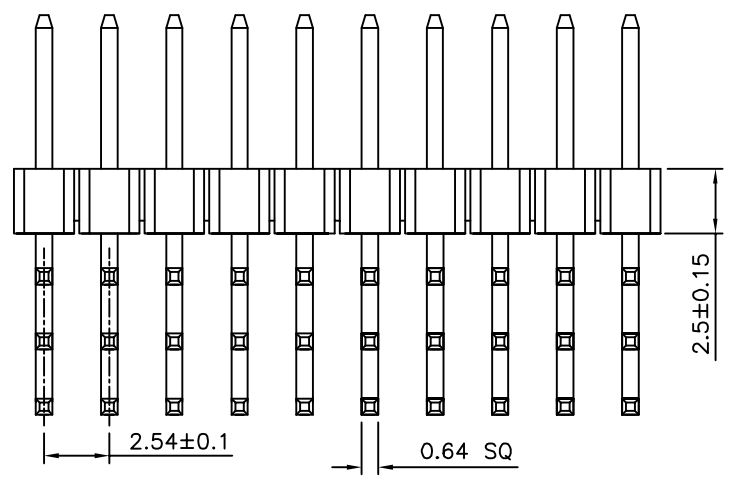


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

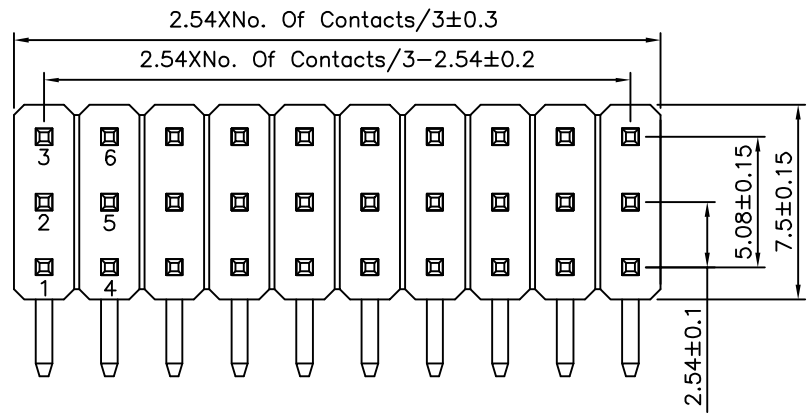

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 05583		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*							
		EMILY									
		CHECKED BY									
		HZF									
		DRAWING BY									
		CYP									
SCALE	NONE	REV.	A0	UNIT			A0	NEW RELEASE		HZF	08/09/2014
						NO.	REV.	REVISIONS		CHK	DATE
5		6		7		8		9		0	