

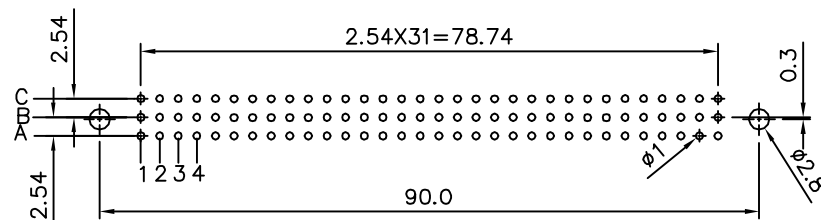



SPECIFICATION

Current Rating:2 Amp
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:30 Milliohms Max. At DC 100mA
Insulation Resistance:1000 Megaohms Min. At DC 500V
Operation Temperature:-55°C~+105°C
Insulator&Cap:PBT+30%G.F.(UL94V-0),Gray
Contact:C2680-H,Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
RoHS Compliant

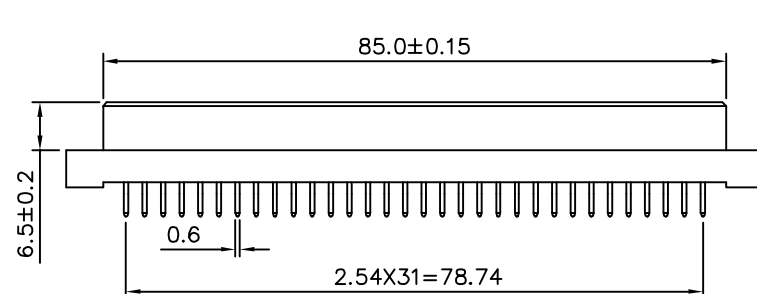

Recommended P.C.B. Layout

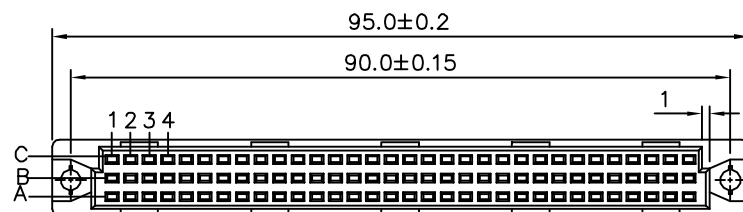

Item No.	Pin	Rows With Contacts	Contact Arrange
20406	96	A+B+C	
05620	64	A+C	
05619	32	A+C	

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

05619

SCALE	NONE
-------	------

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

	$.X \pm 0.15$	$X^* \pm 3^*$
--	---------------	---------------

	.XX ±0.10	.X' ±2'
--	-----------	---------

.XXX ±0.05	.XX° ±1°
------------	----------

UNIT	
------	---

	A
--	---

BO

NEV

NEW RE

LEAS

SE

--	--

HZF

	0
--	---

03/1

4/20

016