

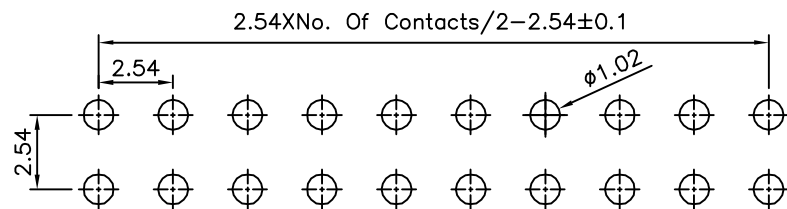
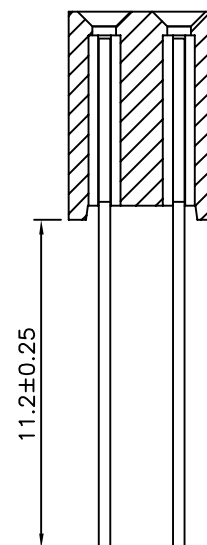


SPECIFICATION

Current Rating:3 Amps
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

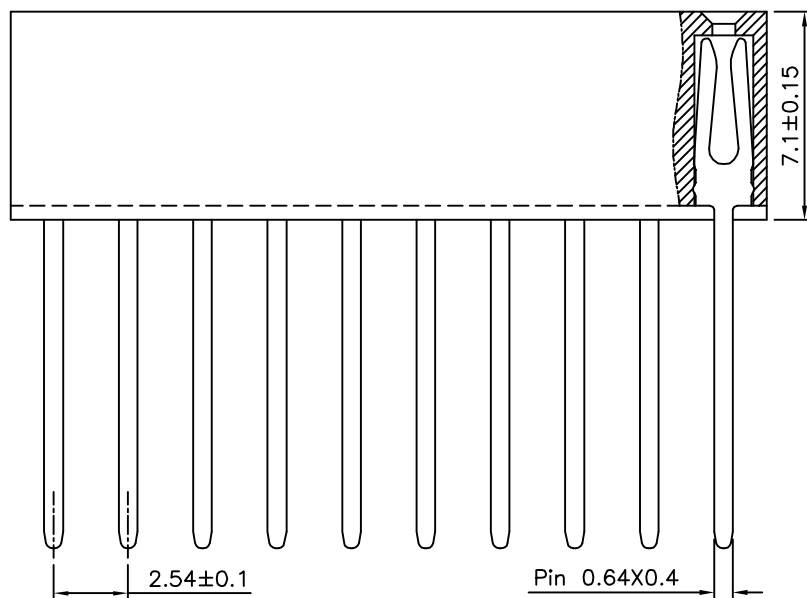

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

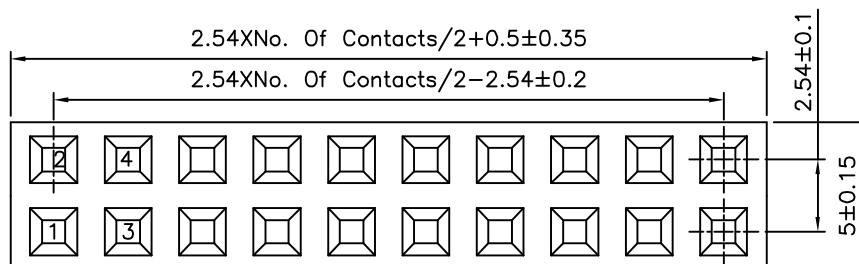

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05625

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
.X ±0.25 .X* ±2"
.X ±0.20 .X* ±1.5"
.XX ±0.15 .XX* ±1"
.XXX ±0.10 .XXX* ±0.5"

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

10/16/2015

SCALE

NONE

REV.

A0