



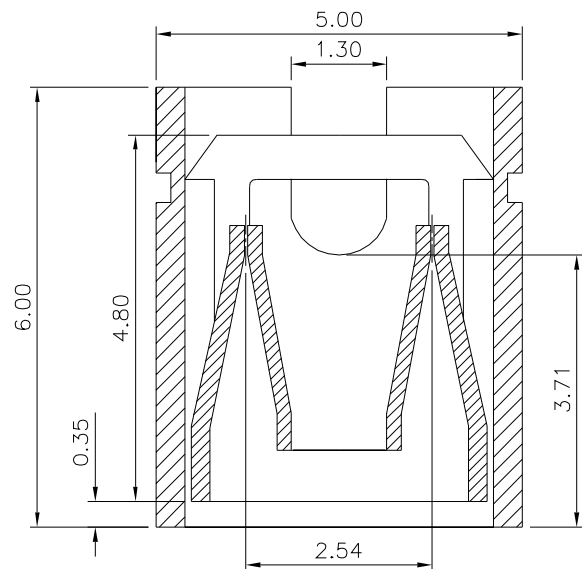

Section A-A

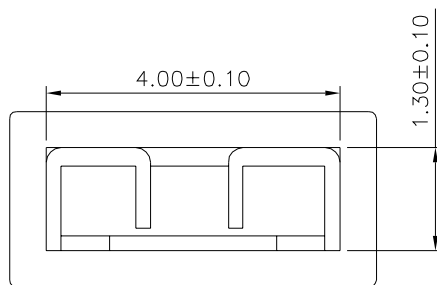

SPECIFICATION

Current Rating:1.0A
Voitage Rating:30V RMS Max.
Withstanding Voltage:500V AC Min. For 1 Minute
Insulator Resistance:500 Megaohms Min. At 500V DC
Contact Resistance:20 Milliohms Max.
Operating Temperature:-45°C~+105°C
Insulator:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05740

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

CO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG ±2°

UNIT
mm



NO. REV.



CO

NEW RELEASE

REVISIONS

HZF

CHK

08/05/2025

DATE