
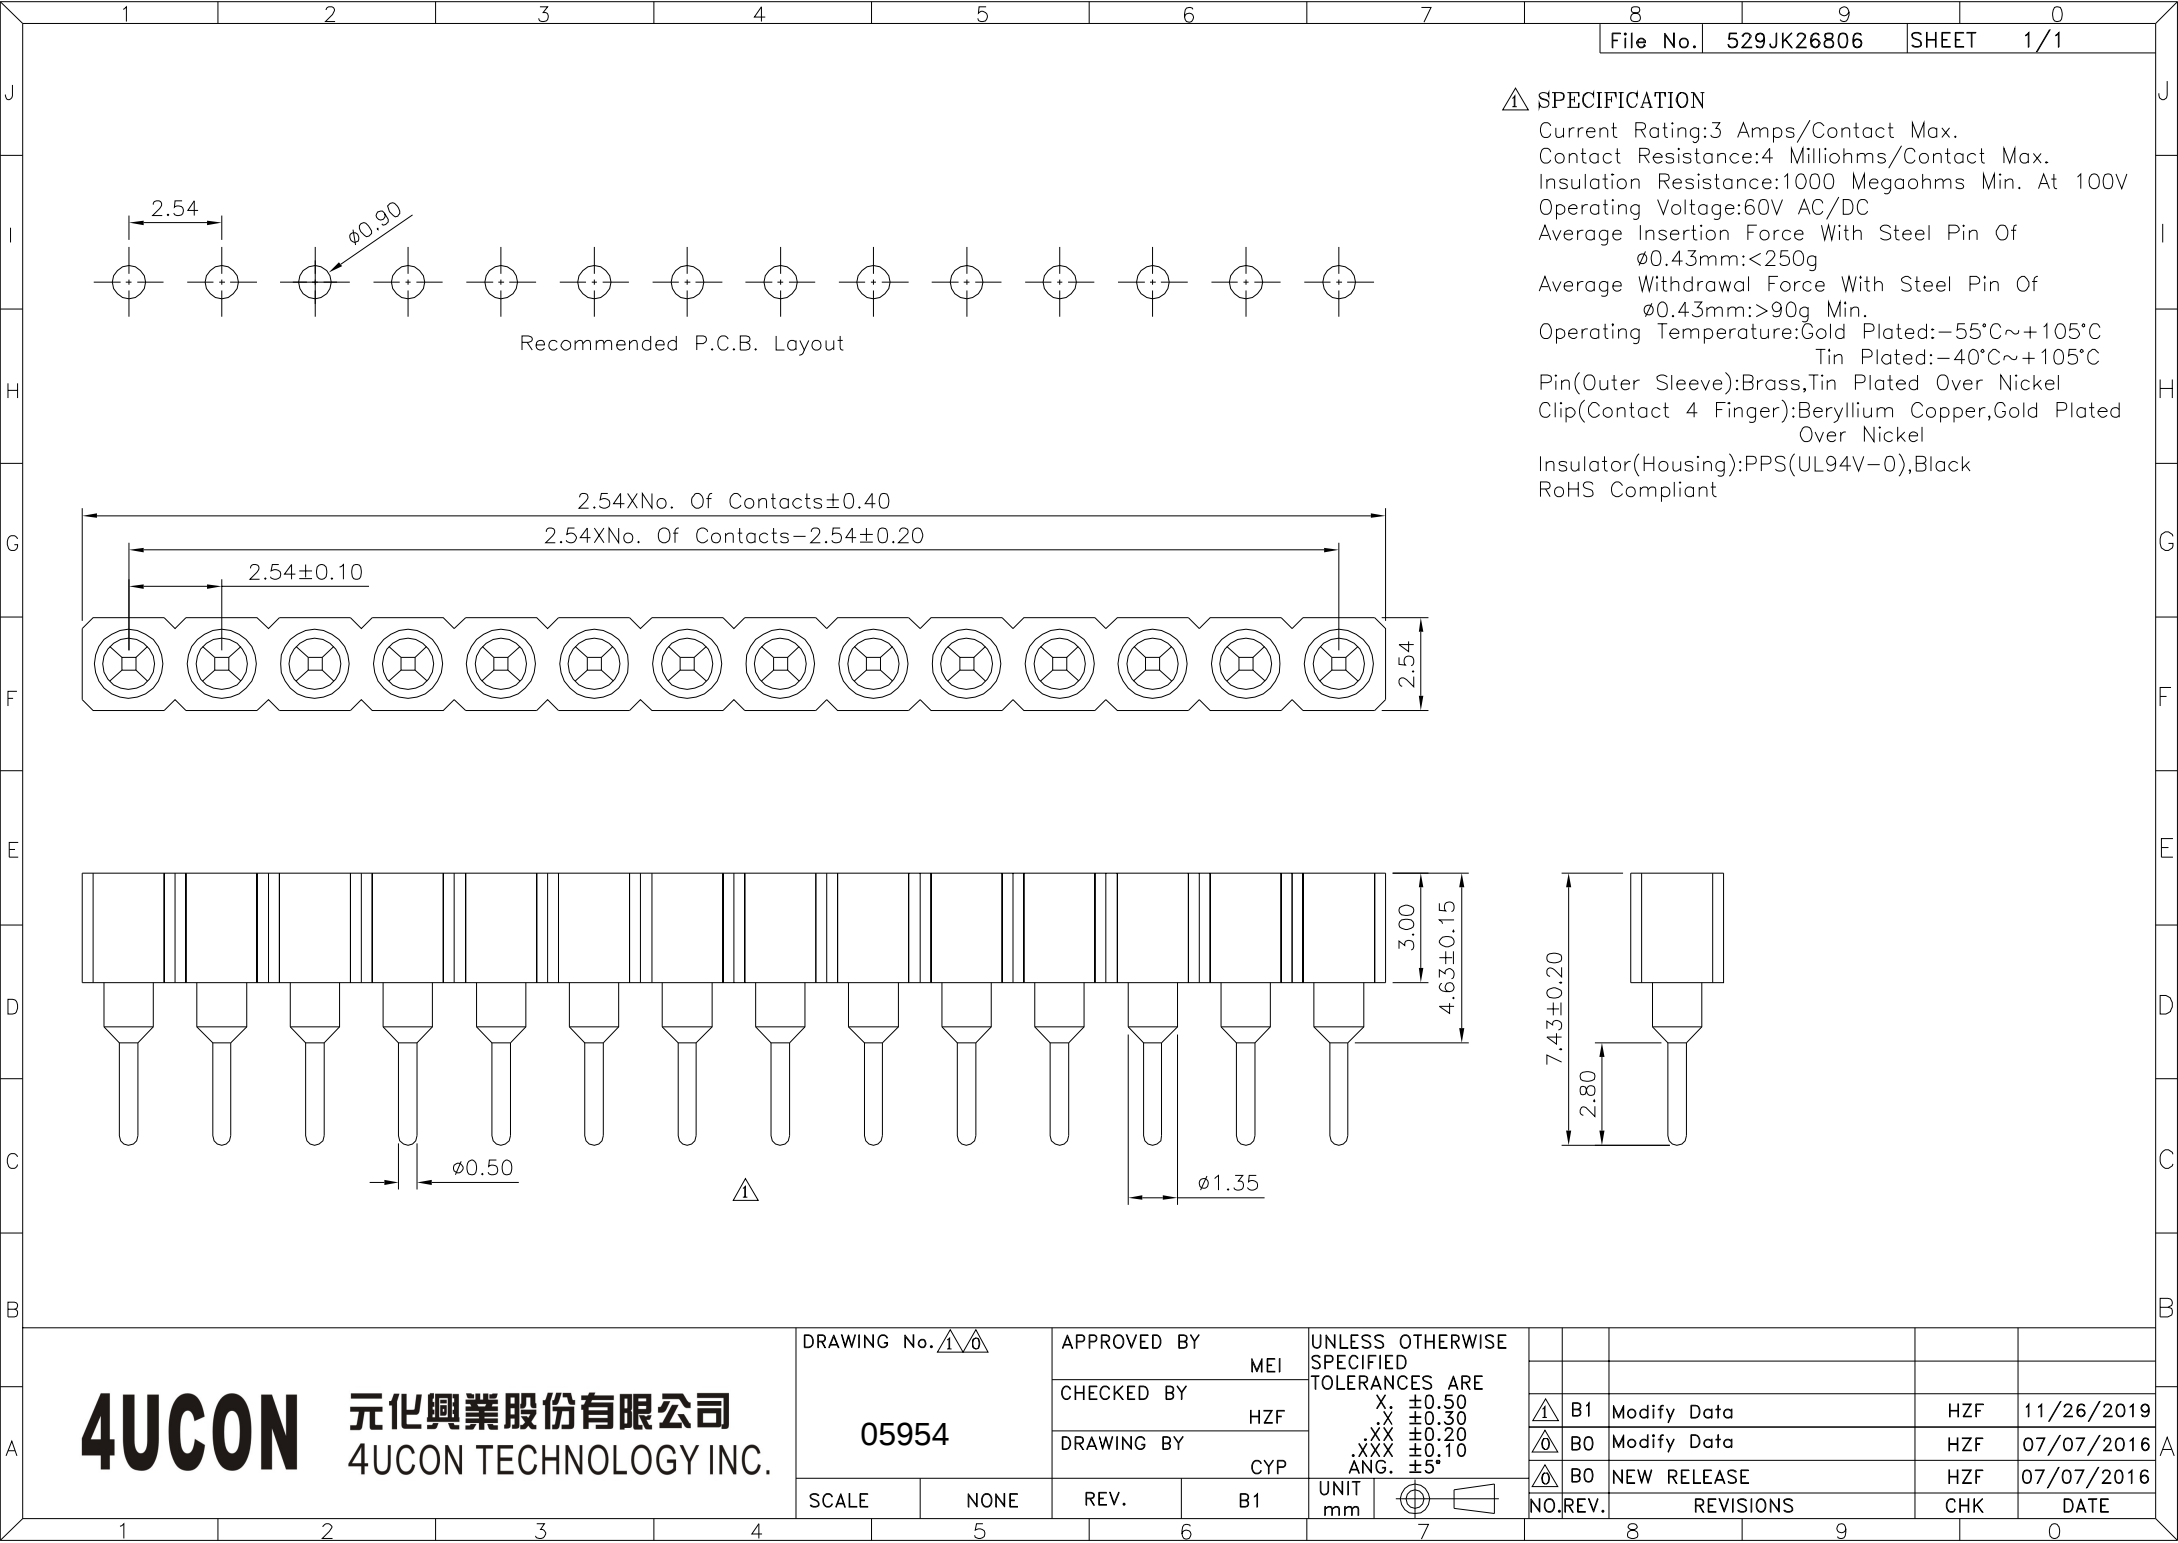




△ SPECIFICATION
Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
 ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>90g Min.
Operating Temperature:Gold Plated:-55°C~+105°C
 Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper,Gold Plated
 Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4Ucon 元化興業股份有限公司 4Ucon TECHNOLOGY INC.				DRAWING No. <u>A10</u>		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 ANG. ±5°									
						MEI											
						CHECKED BY											
						05954		HZF				<u>A1</u> B1	Modify Data	HZF	11/26/2019		
				DRAWING BY		CYP				<u>A0</u> B0	Modify Data	HZF	07/07/2016				
										<u>A0</u> B0	NEW RELEASE	HZF	07/07/2016				
		SCALE		NONE		REV.		B1		UNIT	mm			NO. REV.	REVISIONS	CHK	DATE