

SPECIFICATIONS :

Current Rating : 5 AMP

Dielectric Strength : 1000V For One Minute

Insulation Resistance : 1000 Megohms Min At 500V DC




Temperature : -55°C To +105°C

Shell: Steel, Zinc Plated Or Tin Plated

Pin Contact : Gold Plated Over Nickel

Insulator: PBT Glass Fibre Reinforced

UL 94V-0

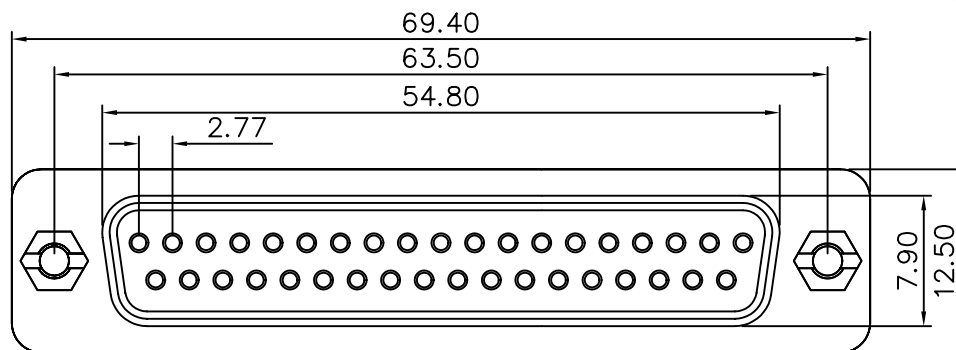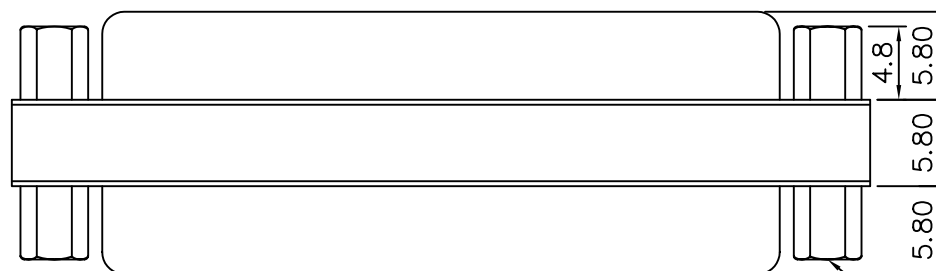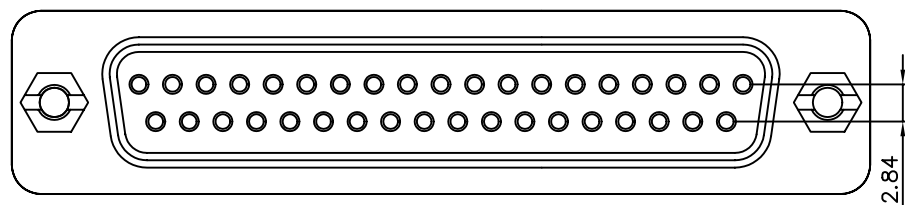

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05976

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

UNIT
mm



AREA

REVISIONS

CHK

DATE