

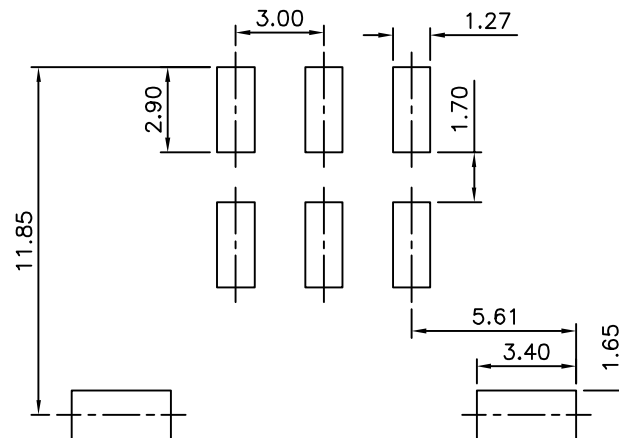
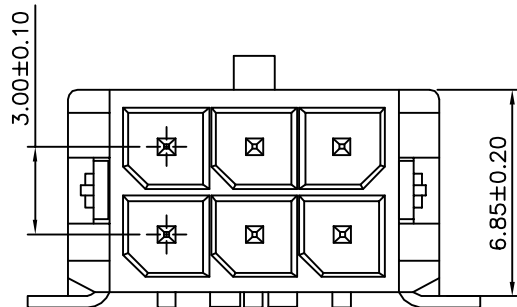


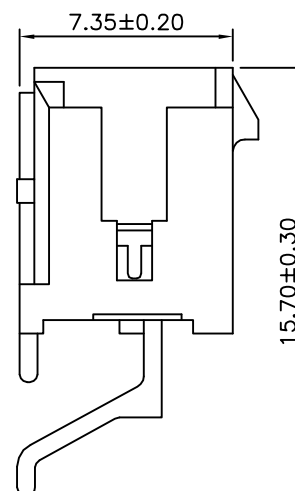

△ Recommended P.C.B. Layout

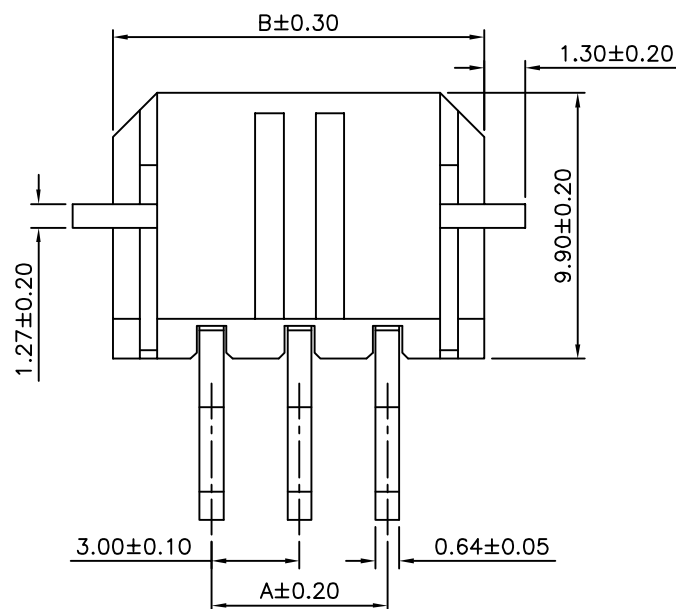

SPECIFICATION

- General Characteristics**
3.0mm Micro-Fit Wafer 2XXX SMT 90° Fitting
Nail:SMT Black Insulator Tin Plated
- Material&Finish**
Insulator:LCP(UL94V-0)
Contact:Brass,Tin Plated
- Electrical Characteristics**
Current Rating:5A AC,DC
Voltage Rating:250V AC,DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
- Environmental Characteristics**
Temperature Range:-25°C~+85°C
- RoHS Compliant**

Pin	A	B
2	--	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

06306

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm




NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	05/27/2014
△A1		Modify Data	HZF	03/28/2014
△A0		NEW RELEASE	HZF	04/30/2012


	1	2	3	4	5	6	7	8	9	0
								File No.	714	SHEET 2/2
J										
I										
H										
G										
F										
E										
D										
C										
B										
A										

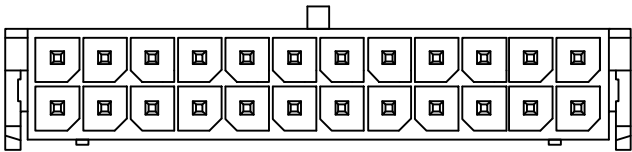


2X12P

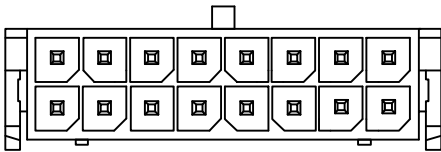


2X08P




2X04P

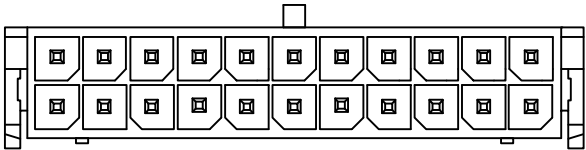


2X11P

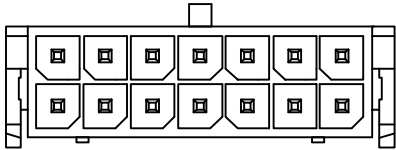


2X07P




2X03P

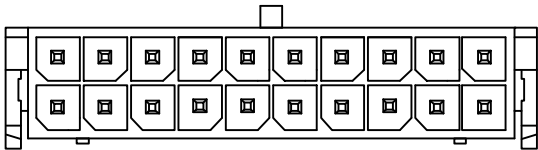


2X10P




2X06P




2X02P

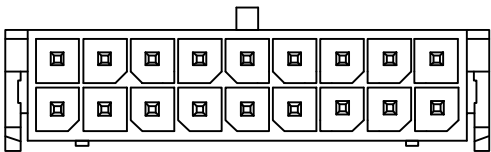

2X09P



2X05P



2X01P

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

06306


APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

SCALE
NONE

REV.
A2

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	05/27/2014
△A1		Modify Data	HZF	03/28/2014
△A0		NEW RELEASE	HZF	04/30/2012