
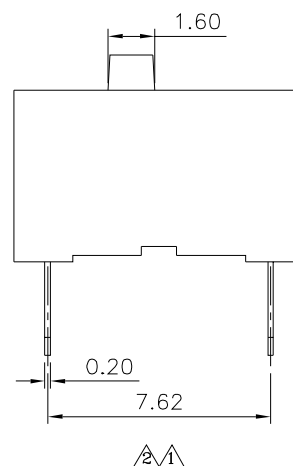
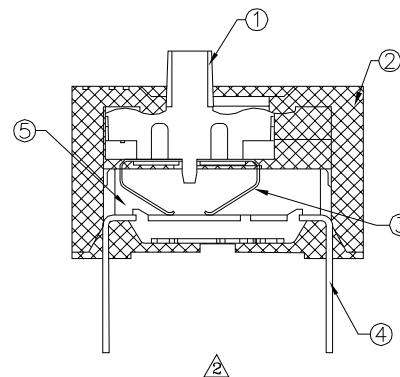
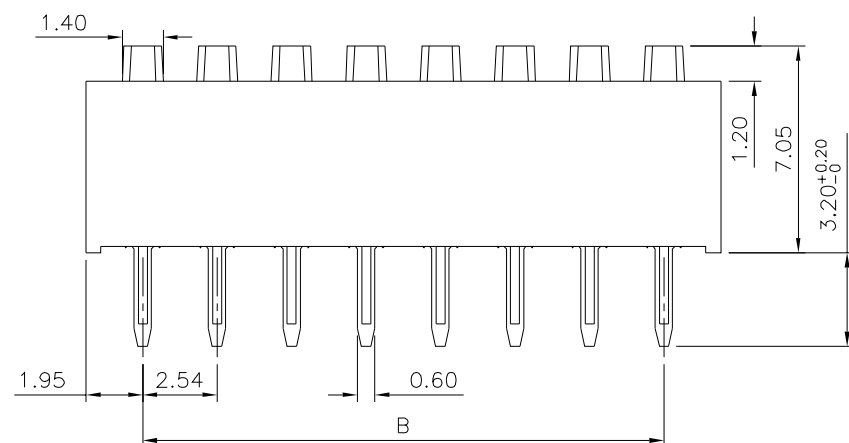


△ Recommended P.C.B. Layout

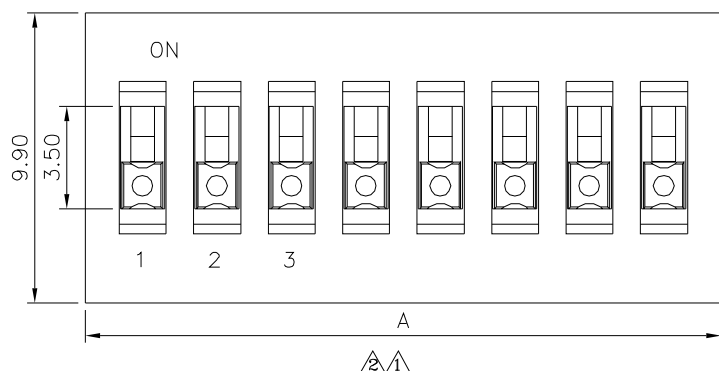


△ SPECIFICATION

Current Range:
Non-Switching: 100mA 50V DC
Switching: 25mA 24V DC
Withstanding Voltage: 500V AC 50Hz Or
60Hz For 1 Minute
Contact Resistance: 50 Milliohms Max.(Initial)
Insulation Resistance: 100 Megaohms Min.
At 500V DC, 60s ± 5s
Operation Temperature Range: -40°C ~ +85°C
Operation Force: 9.8N Max.
RoHS Compliant

△

Pin	A	B
1	3.90	
2	6.44	2.54
3	8.98	5.08
4	11.52	7.62
5	14.06	10.16
6	16.60	12.70
7	19.14	15.24
8	21.68	17.78
9	24.22	20.32
10	26.76	22.86
12	31.84	27.94

Schematic(Typ.)

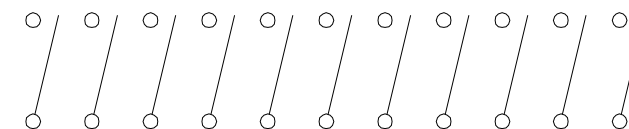

△ (1,2,3,4,5,6,7,8,9,10,12 Pos Avail)

⑤	Base	1	PA66,UL94V-0	Black
④	Terminal	-	Brass	Gold Plated Over Nickel
③	Contact	-	C7035	Gold Plated Over Nickel
②	Cover	1	PBT,UL94V-0	Blue
①	Actuator	-	PBT,UL94V-0	White
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

07240

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
~10 ±0.10
10~ ±0.20

SCALE NONE REV. B2

UNIT mm



△	B2	Modify Data	HZF	07/10/2018
△	B1	Modify Data	HZF	05/12/2016
△	B0	NEW RELEASE	HZF	10/10/2013
NO.	REV.	REVISIONS	CHK	DATE