

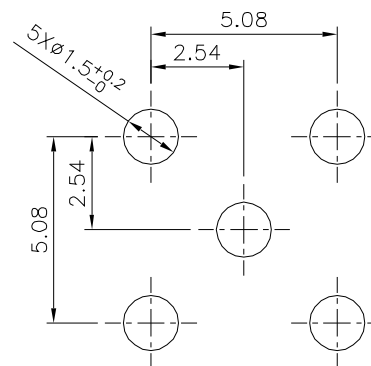


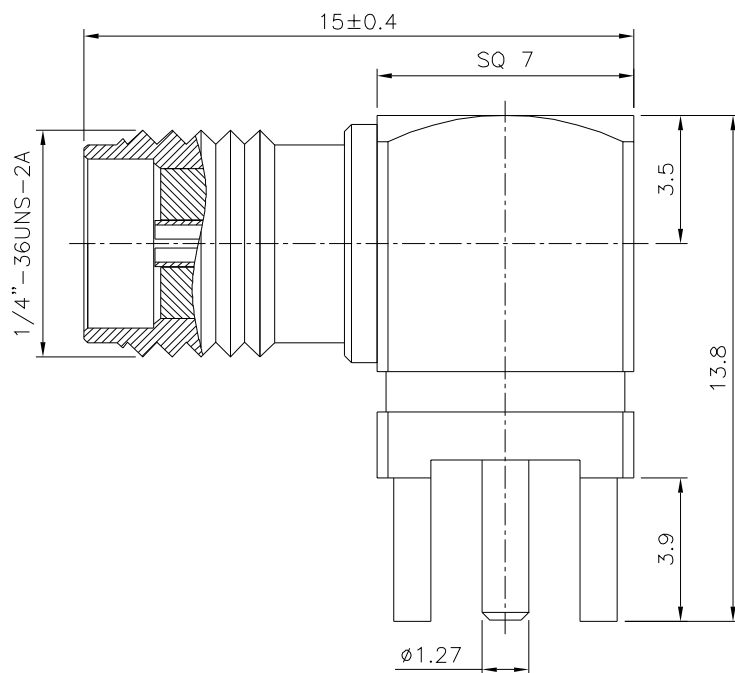

Recommended P.C.B. Layout

SPECIFICATION

Impedance: 50 Ohms
 Frequency Range: DC ~ 6GHz
 V.S.W.R: 1.3 Max.
 Working Voltage: 500V AC
 Withstand Voltage: 1000V AC At 1 Minute
 Insulation Resistance: 5000 Megaohms Min.
 At DC 500V
 Center Contact Resistance: 3.0 Milliohms Max./10mA DC
 Outer Contact Resistance: 2.0 Milliohms Max./10mA DC
 Temperature Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 RoHS Compliant

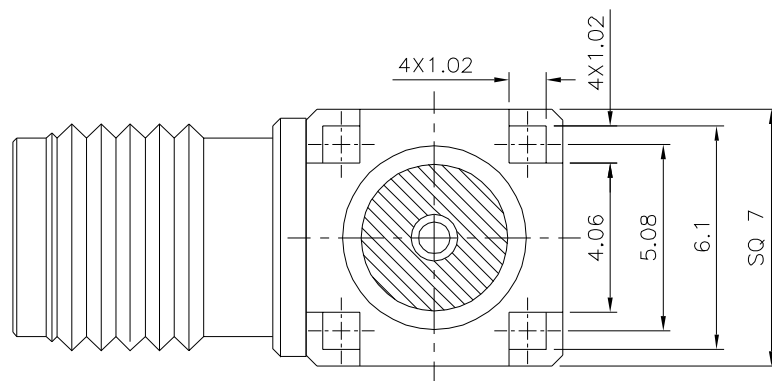

⑤ Insulator	1	Teflon	
④ Body	1	Brass	Gold Plated Over Nickel
③ Center Pin	1	Phosphor Bronze	Gold Plated Over Nickel
② Insulator	1	Teflon	
① Body	1	Brass	Gold Plated Over Nickel
No. Description	Q'ty	Material	Remark

4U CON 元化興業股份有限公司
 4U CON TECHNOLOGY INC.

DRAWING No.

07259

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

BO


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.1

.X ± 0.1

.XX ± 0.1

UNIT
 mm



NO. REV.

BO

NEW RELEASE

REVISIONS

HZF

CHK

10/18/2023

DATE