


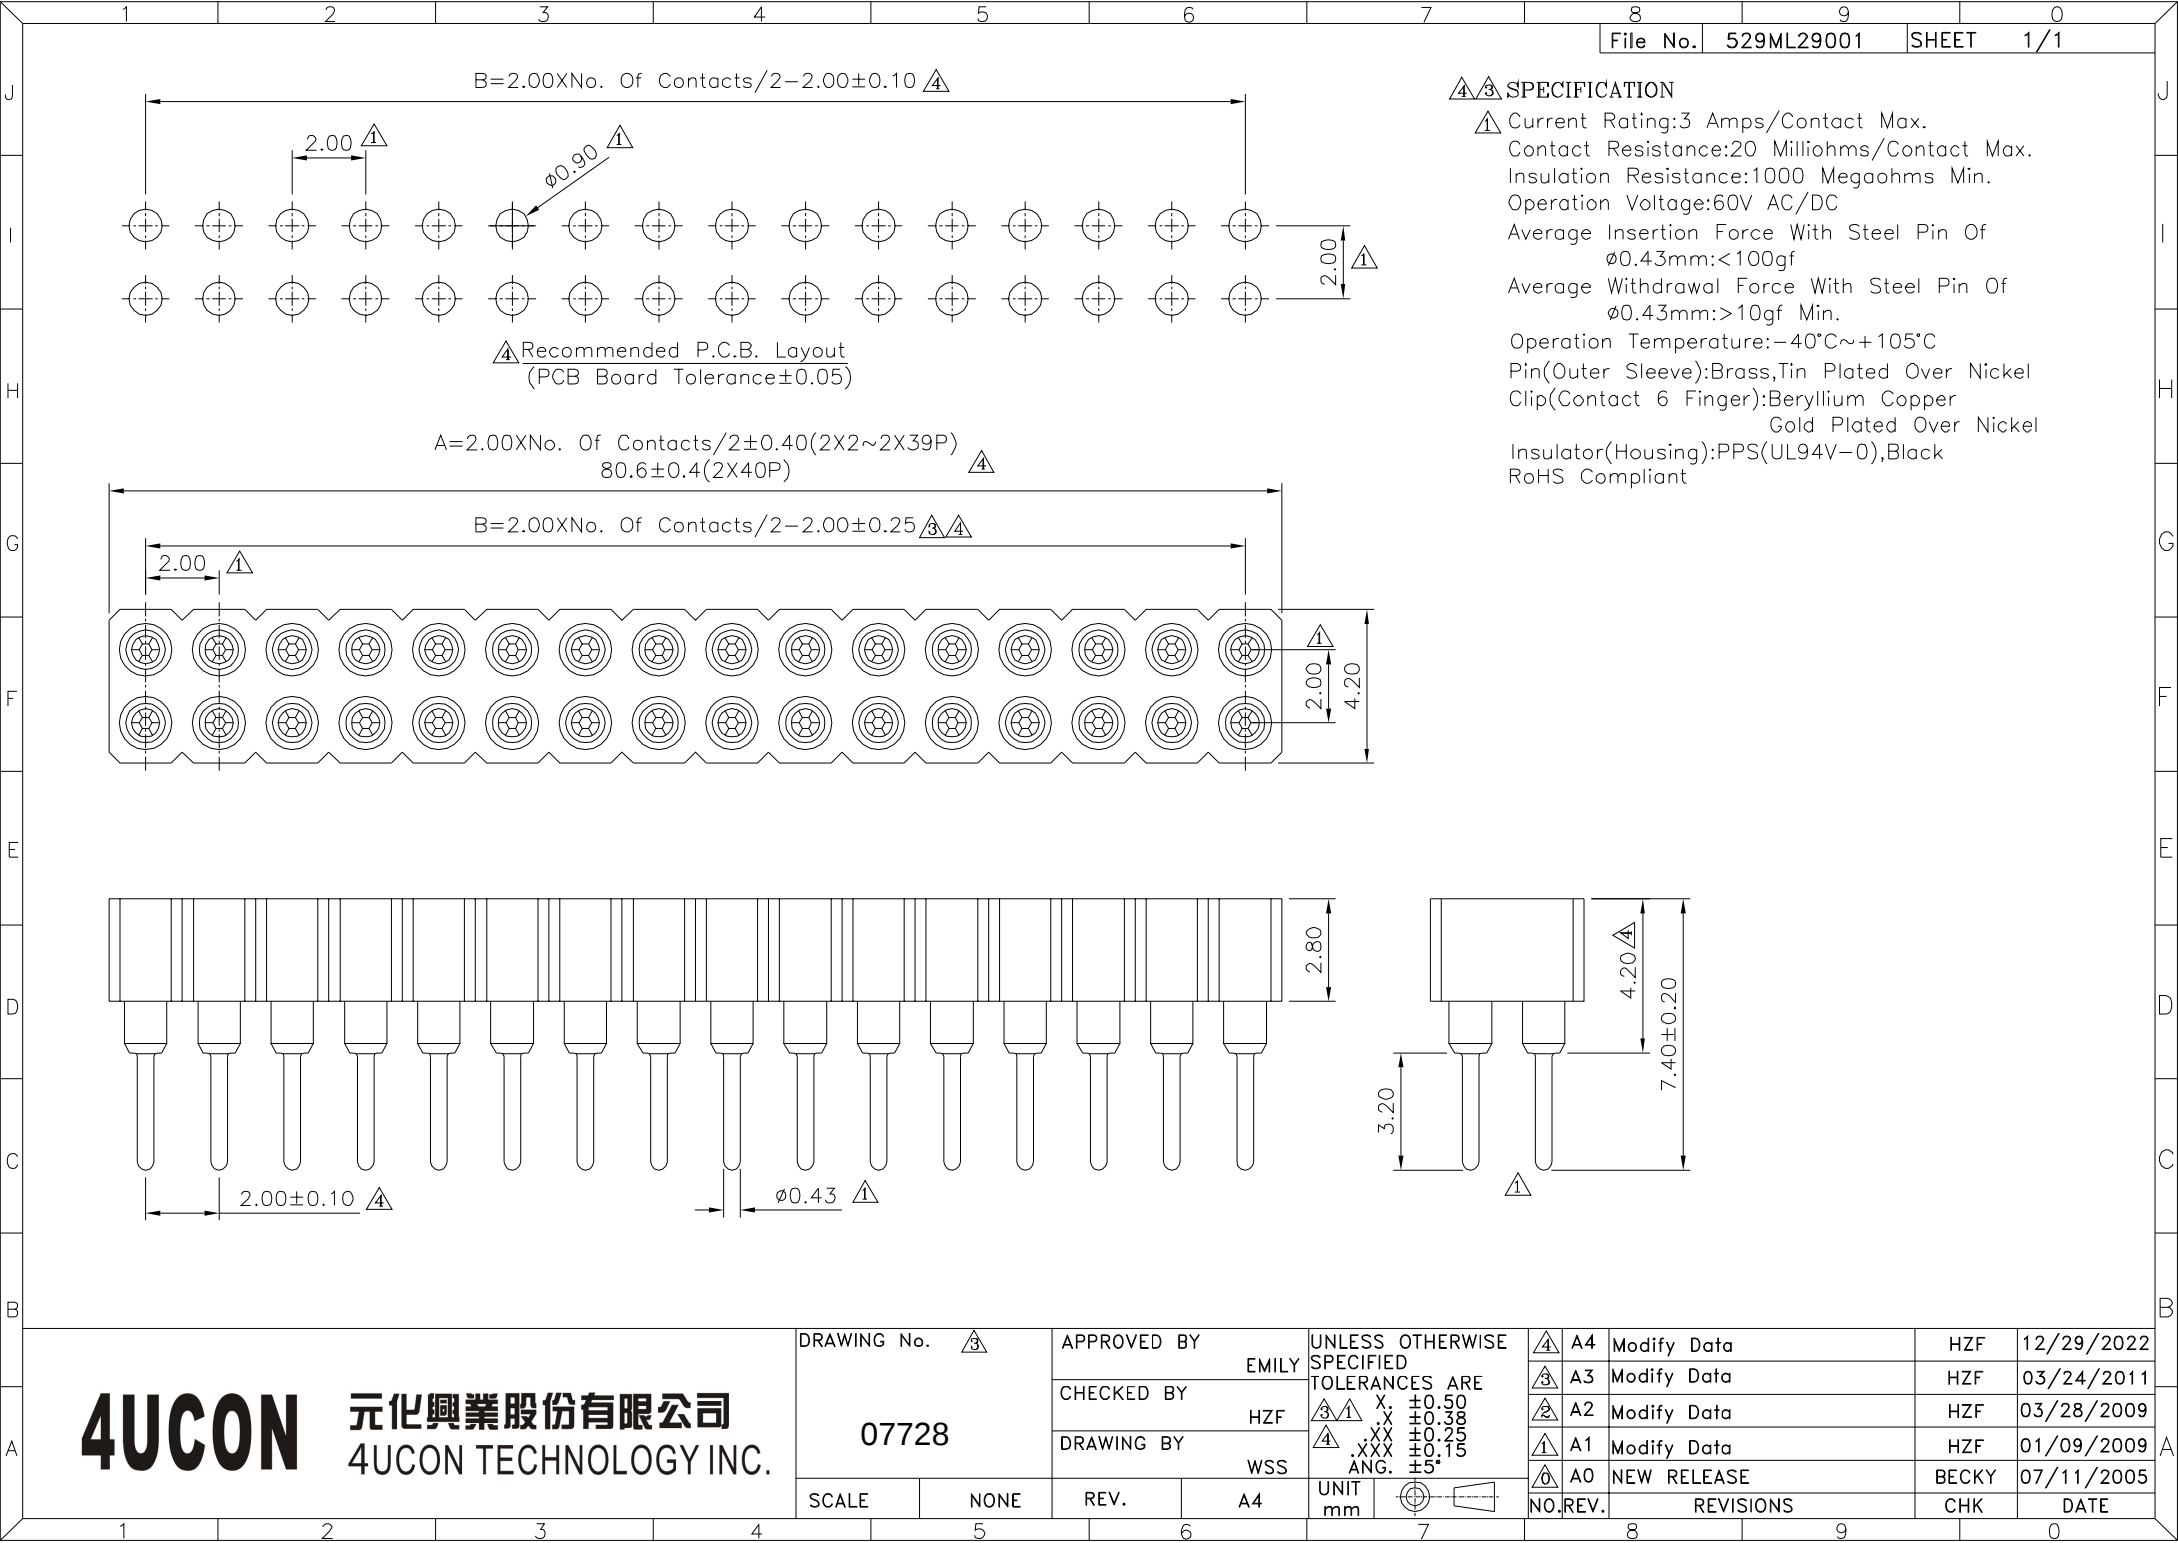

4/3 SPECIFICATION

- 1 Current Rating:3 Amps/Contact Max.
- Contact Resistance:20 Milliohms/Contact Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Voltage:60V AC/DC
- Average Insertion Force With Steel Pin Of ø0.43mm:<100gf
- Average Withdrawal Force With Steel Pin Of ø0.43mm:>10gf Min.
- Operation Temperature:-40°C~+105°C
- Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
- Clip(Contact 6 Finger):Beryllium Copper Gold Plated Over Nickel
- Insulator(Housing):PPS(UL94V-0),Black
- RoHS Compliant


4 Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

B=2.00XNo. Of Contacts/2-2.00±0.25 3/4

2.80

2.00±0.10 4

ø0.43 1



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 3 07728		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.50 X.X ±0.38 X.X ±0.25 .XXX ±0.15 ANG. ±5°	4 A4	Modify Data	HZF	12/29/2022		
		EMILY				3 A3	Modify Data	HZF	03/24/2011	
		CHECKED BY	HZF				2 A2	Modify Data	HZF	03/28/2009
		DRAWING BY						1 A1	Modify Data	HZF
		WSS		0 A0	NEW RELEASE	BECKY	07/11/2005			
SCALE	NONE	REV.	A4		UNIT mm		NO. REV.	REVISIONS	CHK	DATE