

SPECIFICATION

1.General Characteristics

3.0mm Micro Fit 2XXX DIP 180° Male With Post
Black Withstand High Temperature

2.Material&Finish

Terminal:Brass,Tin Plated
Housing:PA6T(UL94V-0),Black



3.Electrical Characteristics

Current Rating:5.0 Amp
Voltage Rating:250V DC/AC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Dielectric Withstand Voltage:1500V AC



4.Environmental Characteristics

Operation Temperature:-25°C~+105°C

5.RoHS Compliant

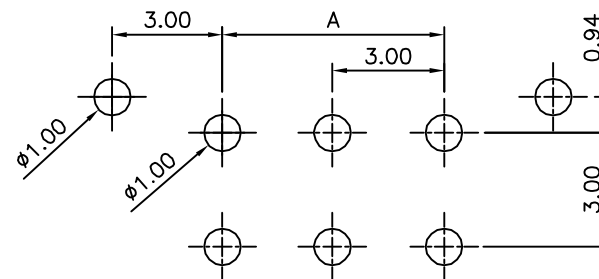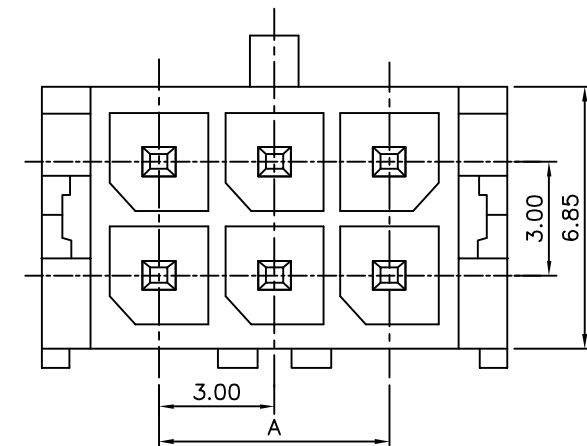

Recommended P.C.B. Layout

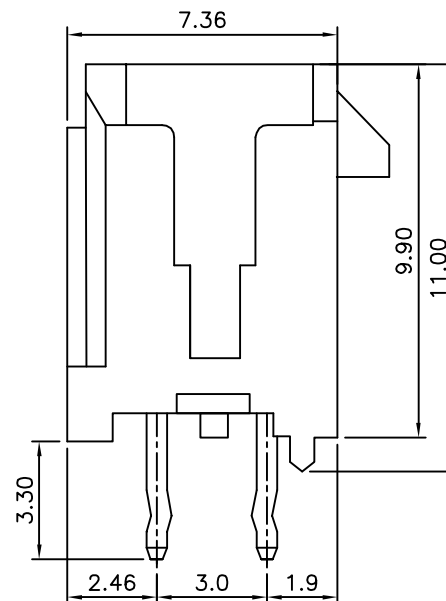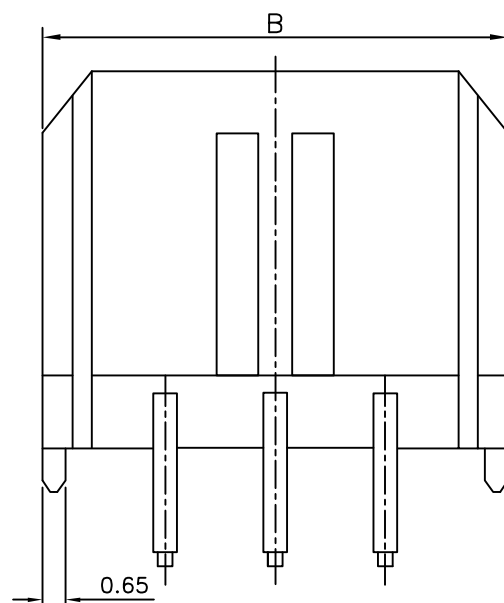

Pos.	A	B
2	-	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07769

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.3
.XX ±0.2
ANG.

SCALE

NONE

REV.

A0

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

05/30/2010