

△△ SPECIFICATION



1.Material&Finish
Insulator:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated

2.Electrical Characteristics
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.

3.Environmental Characteristics
Temperature Range:-25°C~+85°C

4.RoHS Compliant

△ Recommended P.C.B. Layout
△ Tolerance:±0.05

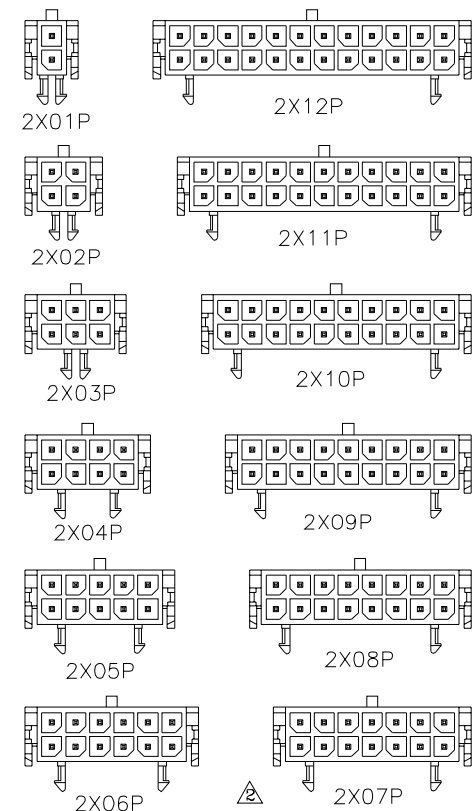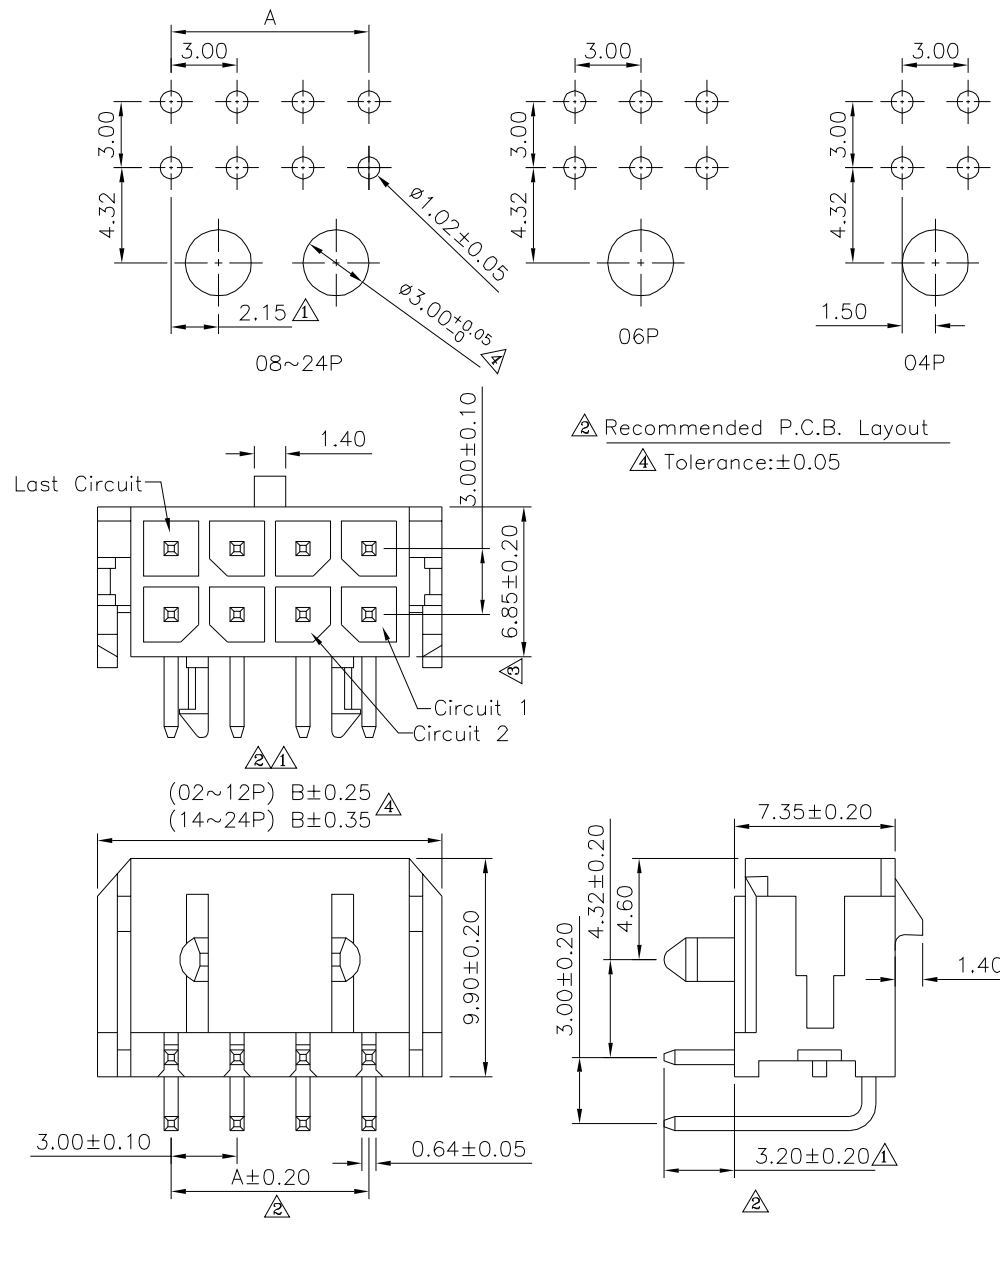

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 07785		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠ X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°		⚠ A4	Modify Data	HZF	04/15/2022	
		MEI				⚠ A3	Modify Dim.	HZF	04/13/2018	
		CHECKED BY				⚠ A2	Modify Data	HZF	09/28/2017	
		HZF				⚠ A1	Modify Data	HZF	08/28/2013	
		DRAWING BY		CYP		⚠ A0	NEW RELEASE	HZF	11/16/2011	
SCALE	NONE	REV.	A4	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE
	5		6		7		8	9		0