




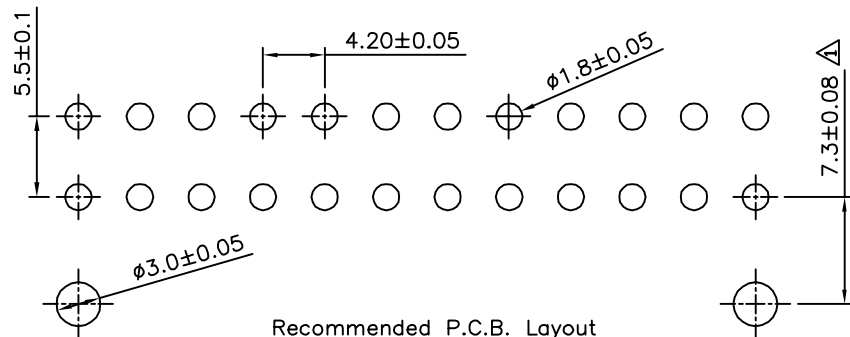

Recommended P.C.B. Layout


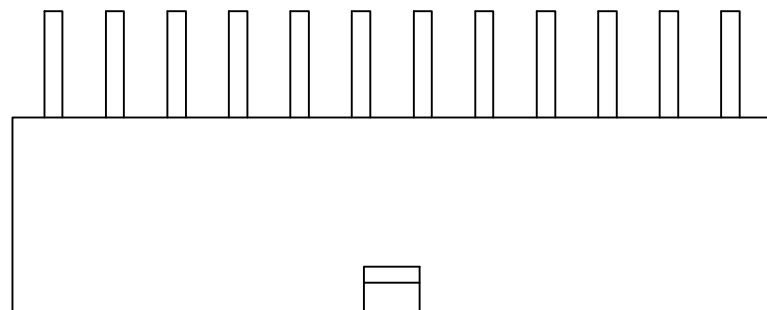


2X3Pin~2X12Pin

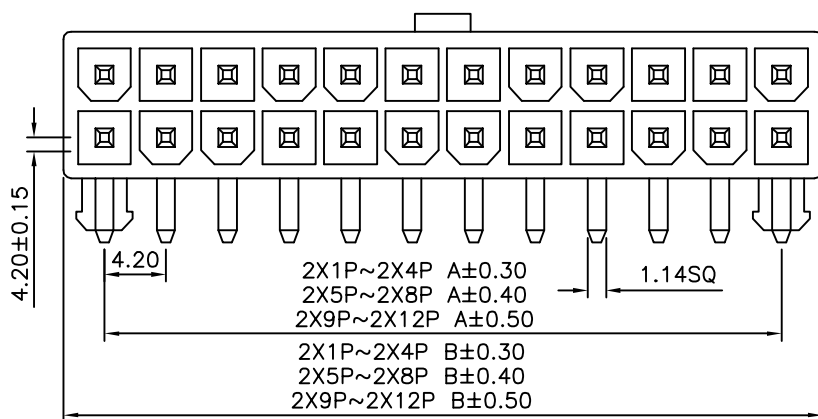



2X1P~2X4P A±0.30
2X5P~2X8P A±0.40
2X9P~2X12P A±0.50
2X1P~2X4P B±0.30
2X5P~2X8P B±0.40
2X9P~2X12P B±0.50

2X1Pin




Recommended P.C.B. Layout

2X2Pin



△ SPECIFICATION

Current Rating:8A AC/DC
Voltage Rating:500V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-2),Nature
Contact:Brass,Tin Plated
Applicable PC Board Thickness:1.6mm
RoHS Compliant

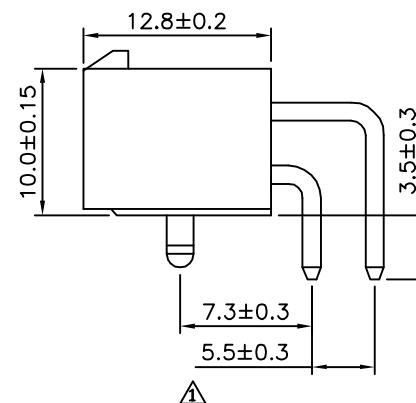

Pin	A	B
02	4.20	9.6
04	8.40	13.8
06	12.60	18.0
08	16.80	22.2
10	21.00	26.4
12	25.20	30.6
14	29.40	34.8
16	33.60	39.0
18	37.80	43.2
20	42.00	47.4
22	46.20	51.6

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07821

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.5
X ±0.25
.XX ±0.2
.XXX ±0.08

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

11/25/2014

△ A0

NEW RELEASE