
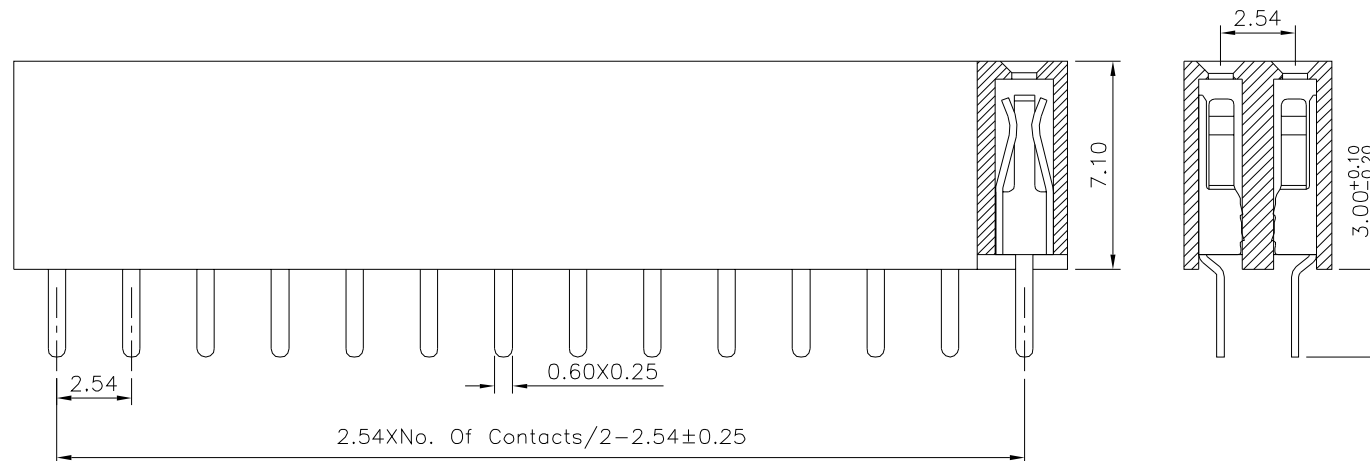


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

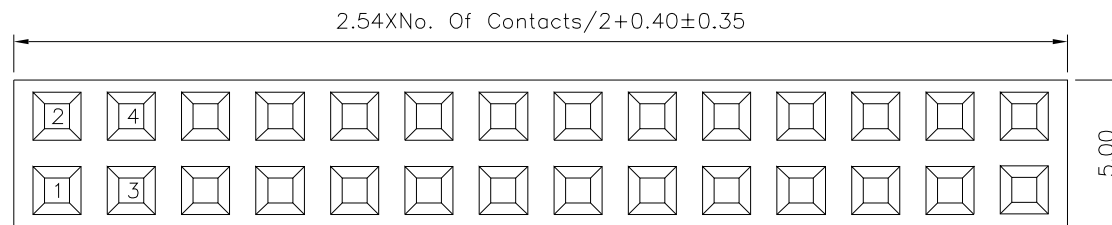

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

07870

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.50
.X	± 0.30
.XX	± 0.20
.XXX	± 0.10
ANG.	$\pm 5^\circ$

UNI	mm
-----	----



	A0
NO.REV.	

D	NEW RELEASE
V.	REVISIONS

HZF
CHK

02/04/2017
DATE