

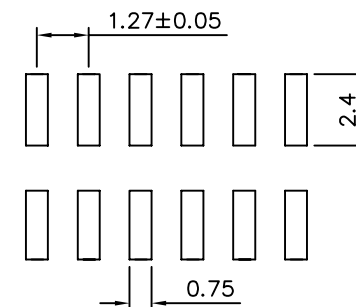
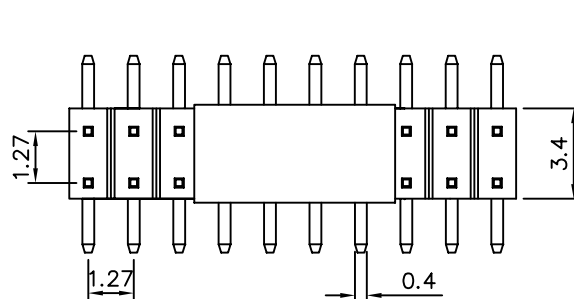


SPECIFICATIONS

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Dielectric Strength: 600VAC Min.
 Operating Temperature: -55°C To +105°C
 Durability: 50 Cycles
 Retention Force: 454g Min.
 Contact Material: Copper Alloy
 Housing Material: Thermoplastic, UL 94V-0
 Contacts: 2x2~2x50



Recommended PCB Layout

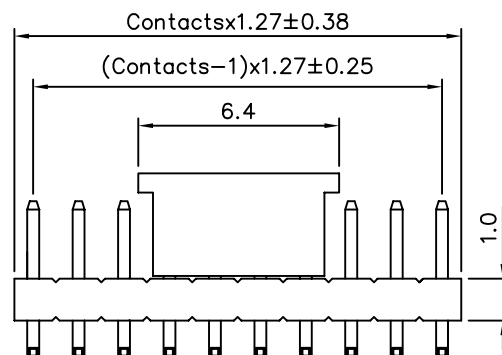

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 07908

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE NONE

REV. A0

UNIT mm

NO. REV. A0 NEW RELEASE BECKY 2004/11/18
 REVISIONS CHK DATE