



△ Recommended P.C.B. Layout


**△ SPECIFICATION**  
 Current:1A  
 Withstanding Voltage:500V AC/Minute  
 Insulation Resistance:5000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 △ Contact:Brass,Gold Flash Over Nickel  
 △ No. Of Contacts:04~100 Contacts  
 RoHS Compliant

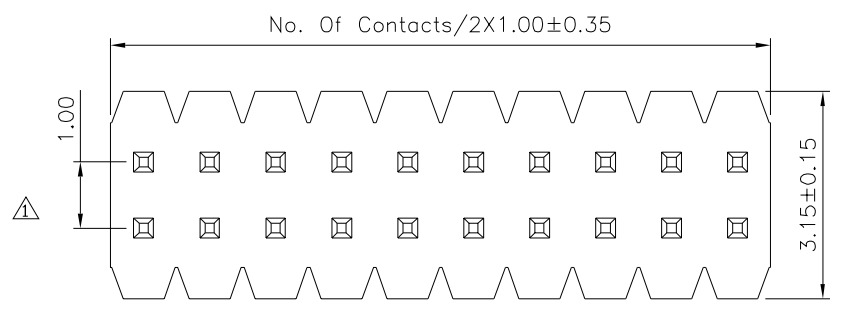

△

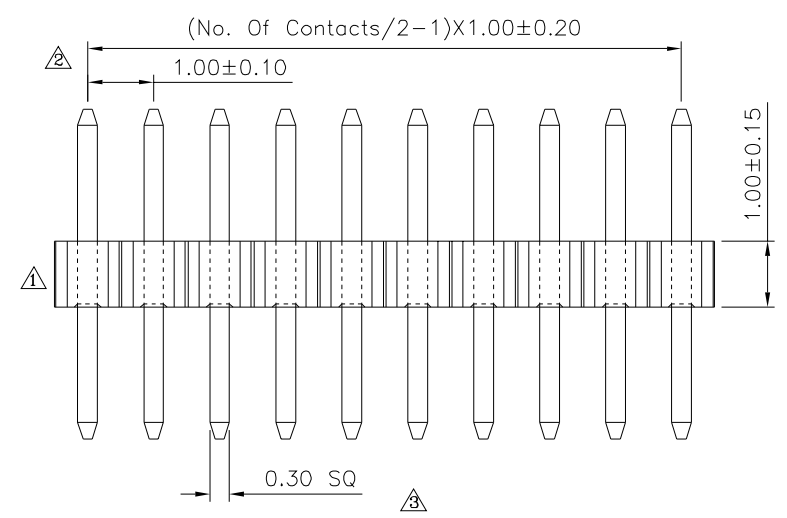

△

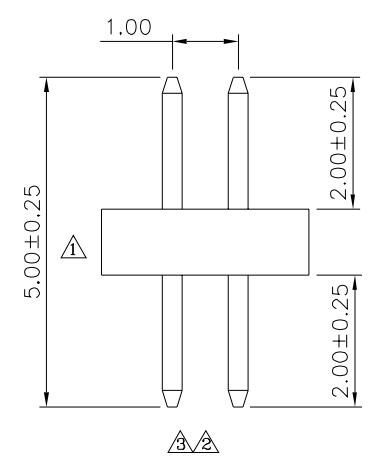

△/△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △/△  
**08127**  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG ±5°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	08/02/2019
△	A2	Modify Data	HZF	05/21/2011
△	A1	Modify Data	HZF	10/15/2009
△	A0	NEW RELEASE	HZF	