


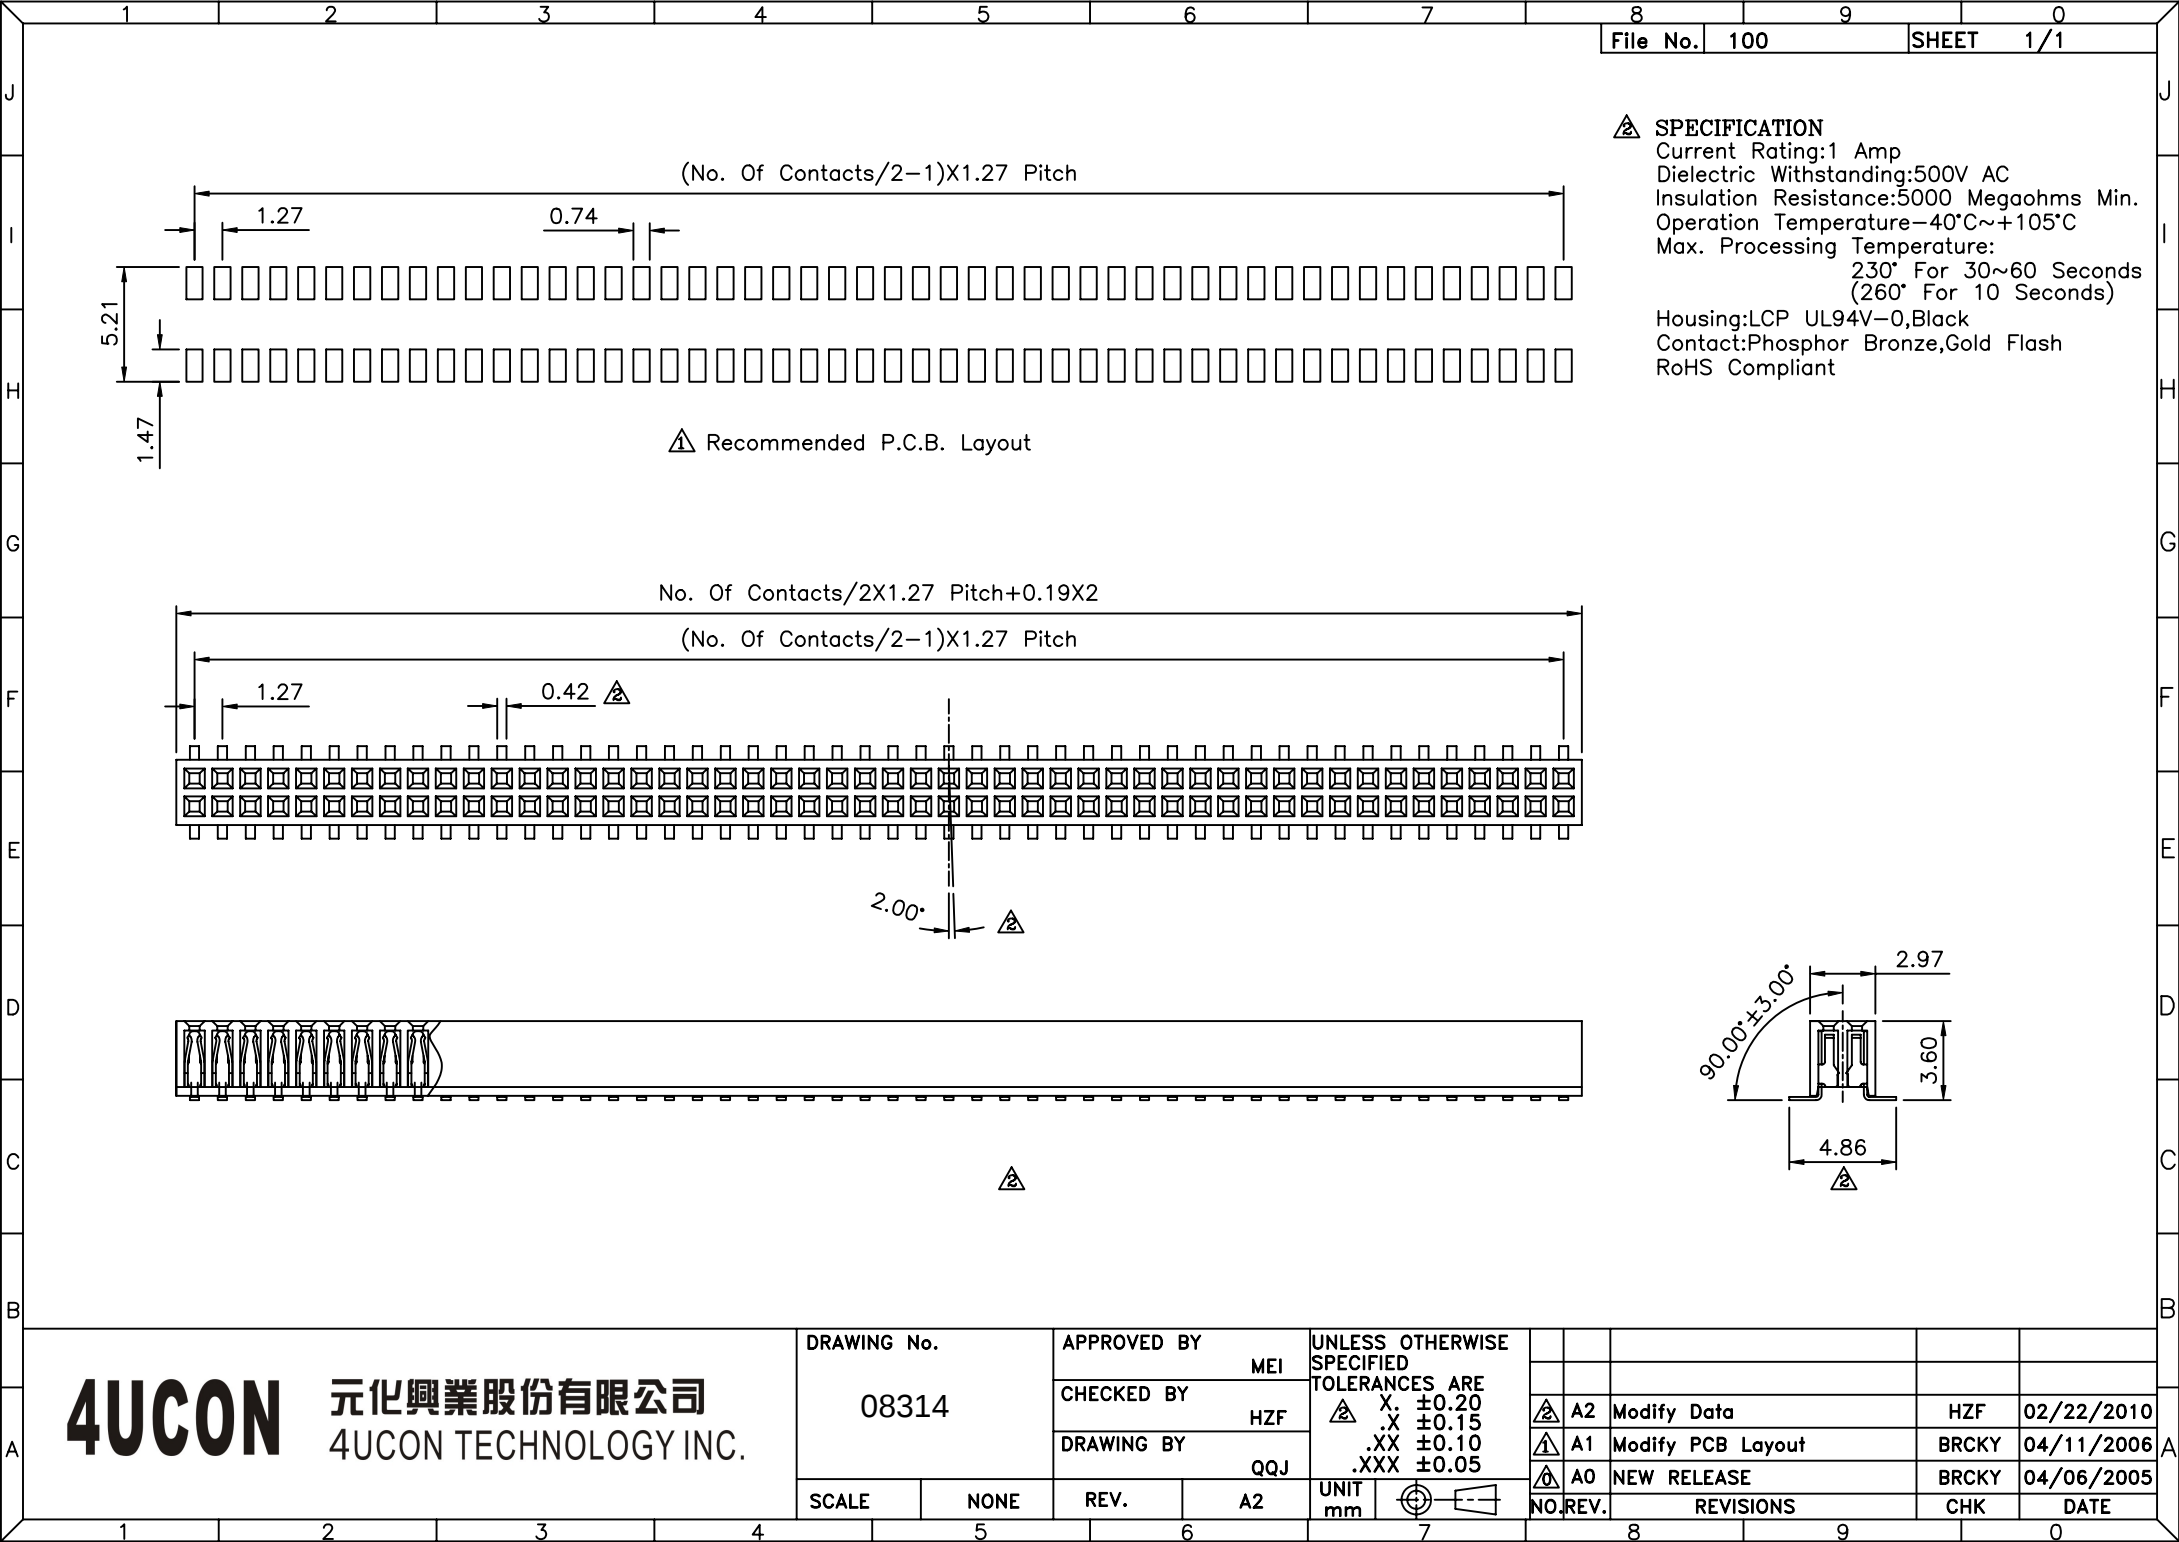

△ SPECIFICATION
Current Rating:1 Amp
Dielectric Withstanding:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature-40°C~+105°C
Max. Processing Temperature:
230° For 30~60 Seconds
(260° For 10 Seconds)
Housing:LCP UL94V-0,Black
Contact:Phosphor Bronze,Gold Flash
RoHS Compliant

4U CON 元化興業股份有限公司
4UCON TECHNOLOGY INC.


DRAWING No.
08314

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
QQJ

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.20
.X ±0.15
.XX ±0.10
.XXX ±0.05

SCALE NONE

REV. A2



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	02/22/2010	
△ A1	Modify PCB Layout	BRCKY	04/11/2006	
△ A0	NEW RELEASE	BRCKY	04/06/2005	