





SPECIFICATIONS

Current Rating:1 Amp
 Insulator Resistance:5000 Megohms Min.
 Dielectric Withstanding:AC 500V
 Operating Temperature:-40°C~+105°C
 Max. Processing Temp.:230°C For 30~60 Seconds
 (260°C For 10 Seconds)

Contact:Phosphor Bronze
 Housing:LCP(UL 94V-0)

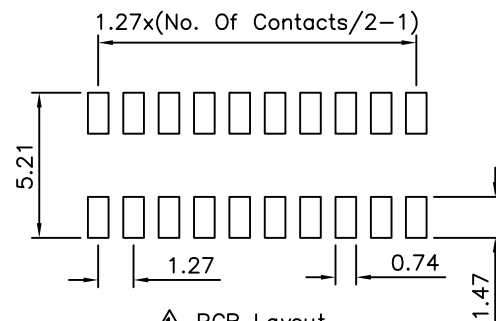

PCB Layout

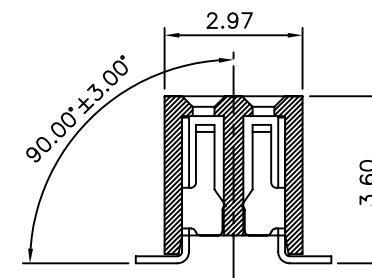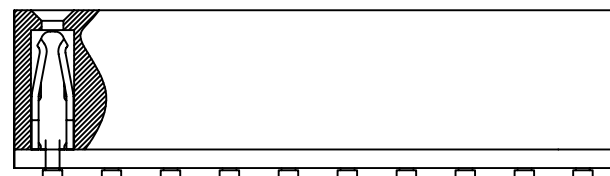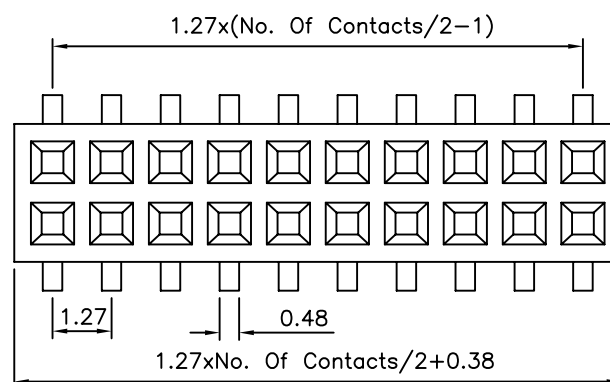

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

08321

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.15
 .XX ±0.10
 .XXX ±0.05

SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify PCB Layout	BECKY	04/11/2006
△ A0	NEW RELEASE	BECKY	04/06/2005