






SPECIFICATION

Current Rating:2.5A AC/DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:600V AC/Minute
Temperature Range:-25°C~+85°C
Insulator:PBT(UL94V-0),Black

⚠ Contact:Brass,Gold Flash Over All,Over Nickel
RoHS Compliant

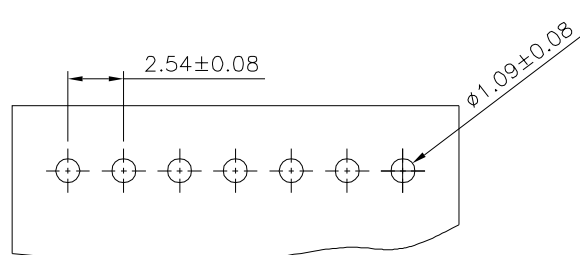

Recommended P.C.B. Layout
Thickness=1.6mm ⚠

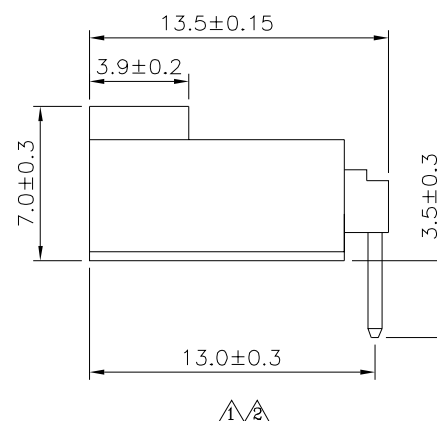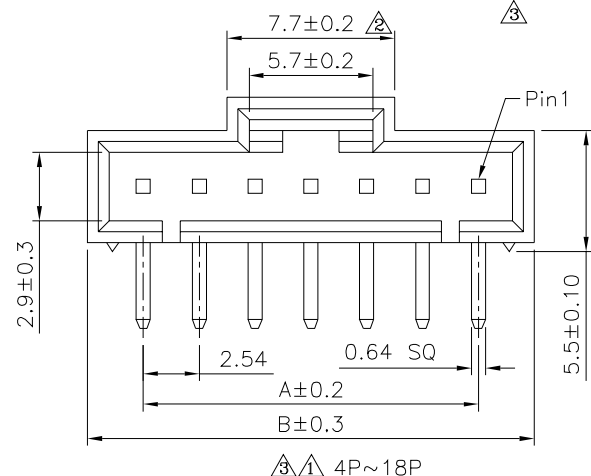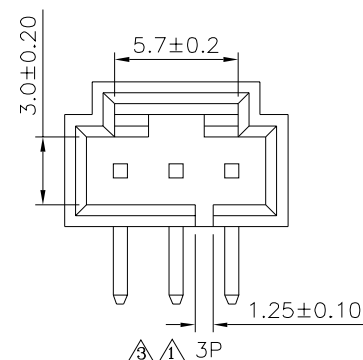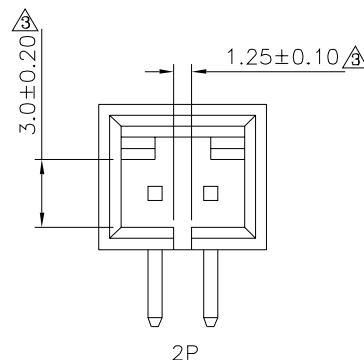

Pin	A	B	Pin	A	B
02	2.54	7.62	11	25.40	30.48
03	5.08	10.16	12	27.94	33.02
04	7.62	12.70	13	30.48	35.56
05	10.16	15.24	14	33.02	38.10
06	12.70	17.78	15	35.56	40.64
07	15.24	20.32	16	38.10	43.18
08	17.78	22.86	17	40.64	45.72
09	20.32	25.40	18	43.18	48.26
10	22.86	27.94			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠ ⚠

08466

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.5
.XX ± 0.25
.XXX ± 0.2
XXX ± 0.08

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	B3	Modify Data	HZF	12/31/2020
⚠	B2	Modify Data	HZF	02/06/2015
⚠	B1	Modify Data	HZF	11/01/2011
⚠	B0	NEW RELEASE	HZF	11/10/2009