

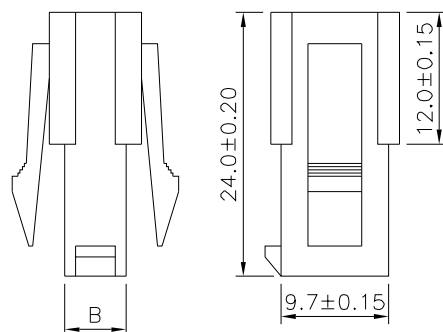
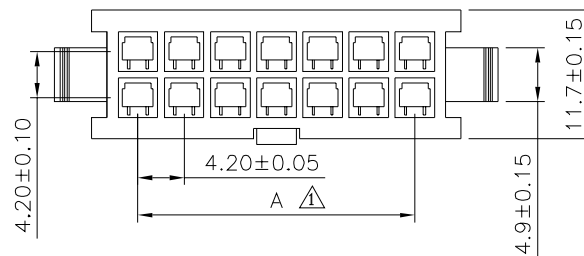


△ SPECIFICATION
 Current Rating:8A AC/DC
 Voltage Rating:500V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+105°C
 Insulator:PA66
 RoHS Compliant



△ 2 Pin

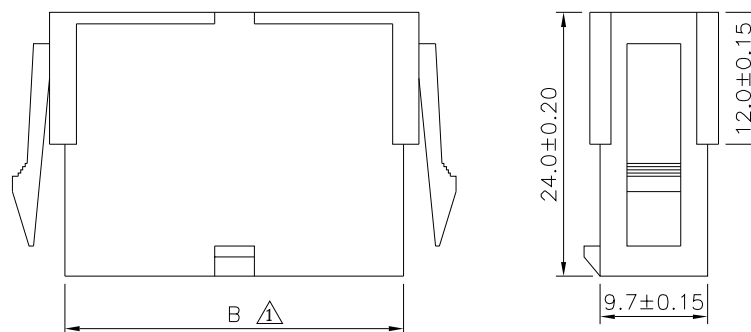

4~24 Pin

Pin	A		B	
02	—		5.6	±0.30
04	4.20	±0.20	9.8	
06	8.40		14.0	
08	12.60	±0.30	18.2	±0.40
10	16.80		22.4	
12	21.00		26.6	
14	25.20	±0.40	30.8	±0.50
16	29.40		35.0	
18	33.60		39.2	
20	37.80	±0.40	43.4	±0.50
22	42.00		47.6	
24	46.20		51.8	

PS. Flame Retardant & Insulator Color:
 UL94V-2 Nature Color
 UL94V-0 White Color
 UL94V-2 Black Color

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.△

09025

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.2
 .XXX ±0.08

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/27/2018
△ A0		NEW RELEASE	HZF	01/12/2010