


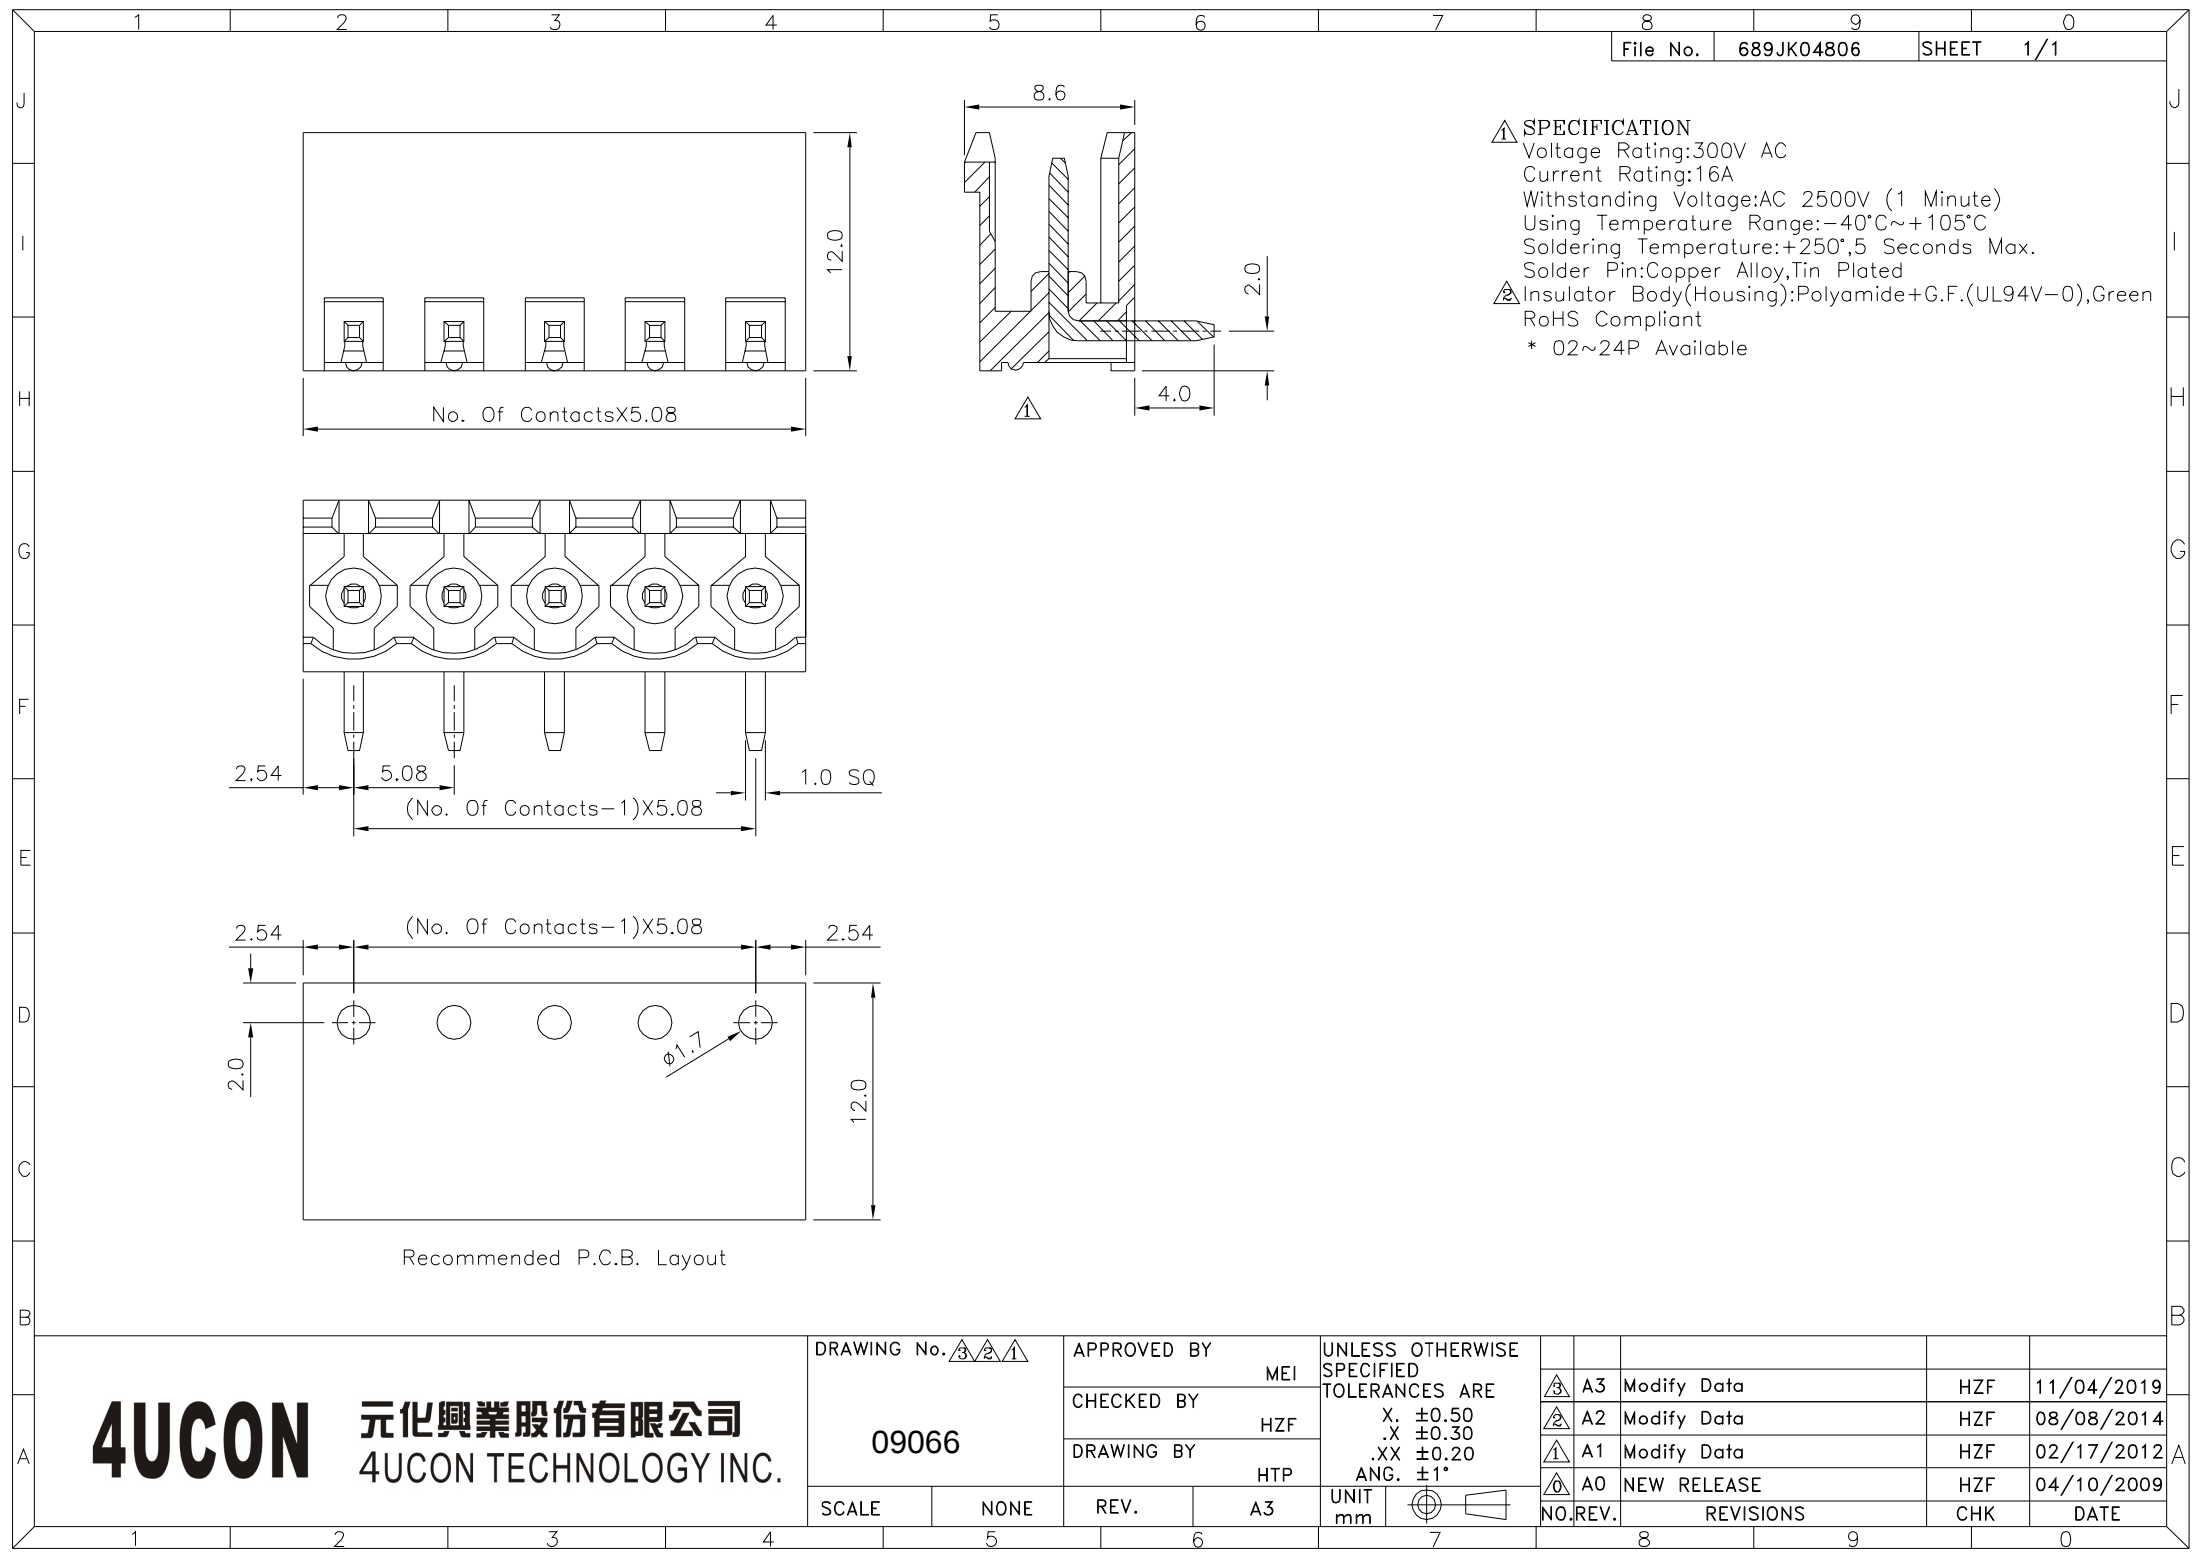

△ SPECIFICATION
Voltage Rating: 300V AC
Current Rating: 16A
Withstanding Voltage: AC 2500V (1 Minute)
Using Temperature Range: -40°C ~ +105°C
Soldering Temperature: +250°, 5 Seconds Max.
Solder Pin: Copper Alloy, Tin Plated
△ Insulator Body (Housing): Polyamide + G.F. (UL94V-0), Green
RoHS Compliant
* 02~24P Available

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. 3/2/1

09066

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HTP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm



3 A3

Modify Data

HZF

11/04/2019

2 A2

Modify Data

HZF

08/08/2014

1 A1

Modify Data

HZF

02/17/2012

0 A0

NEW RELEASE

HZF

04/10/2009

NO. REV.

REVISIONS

CHK

DATE