



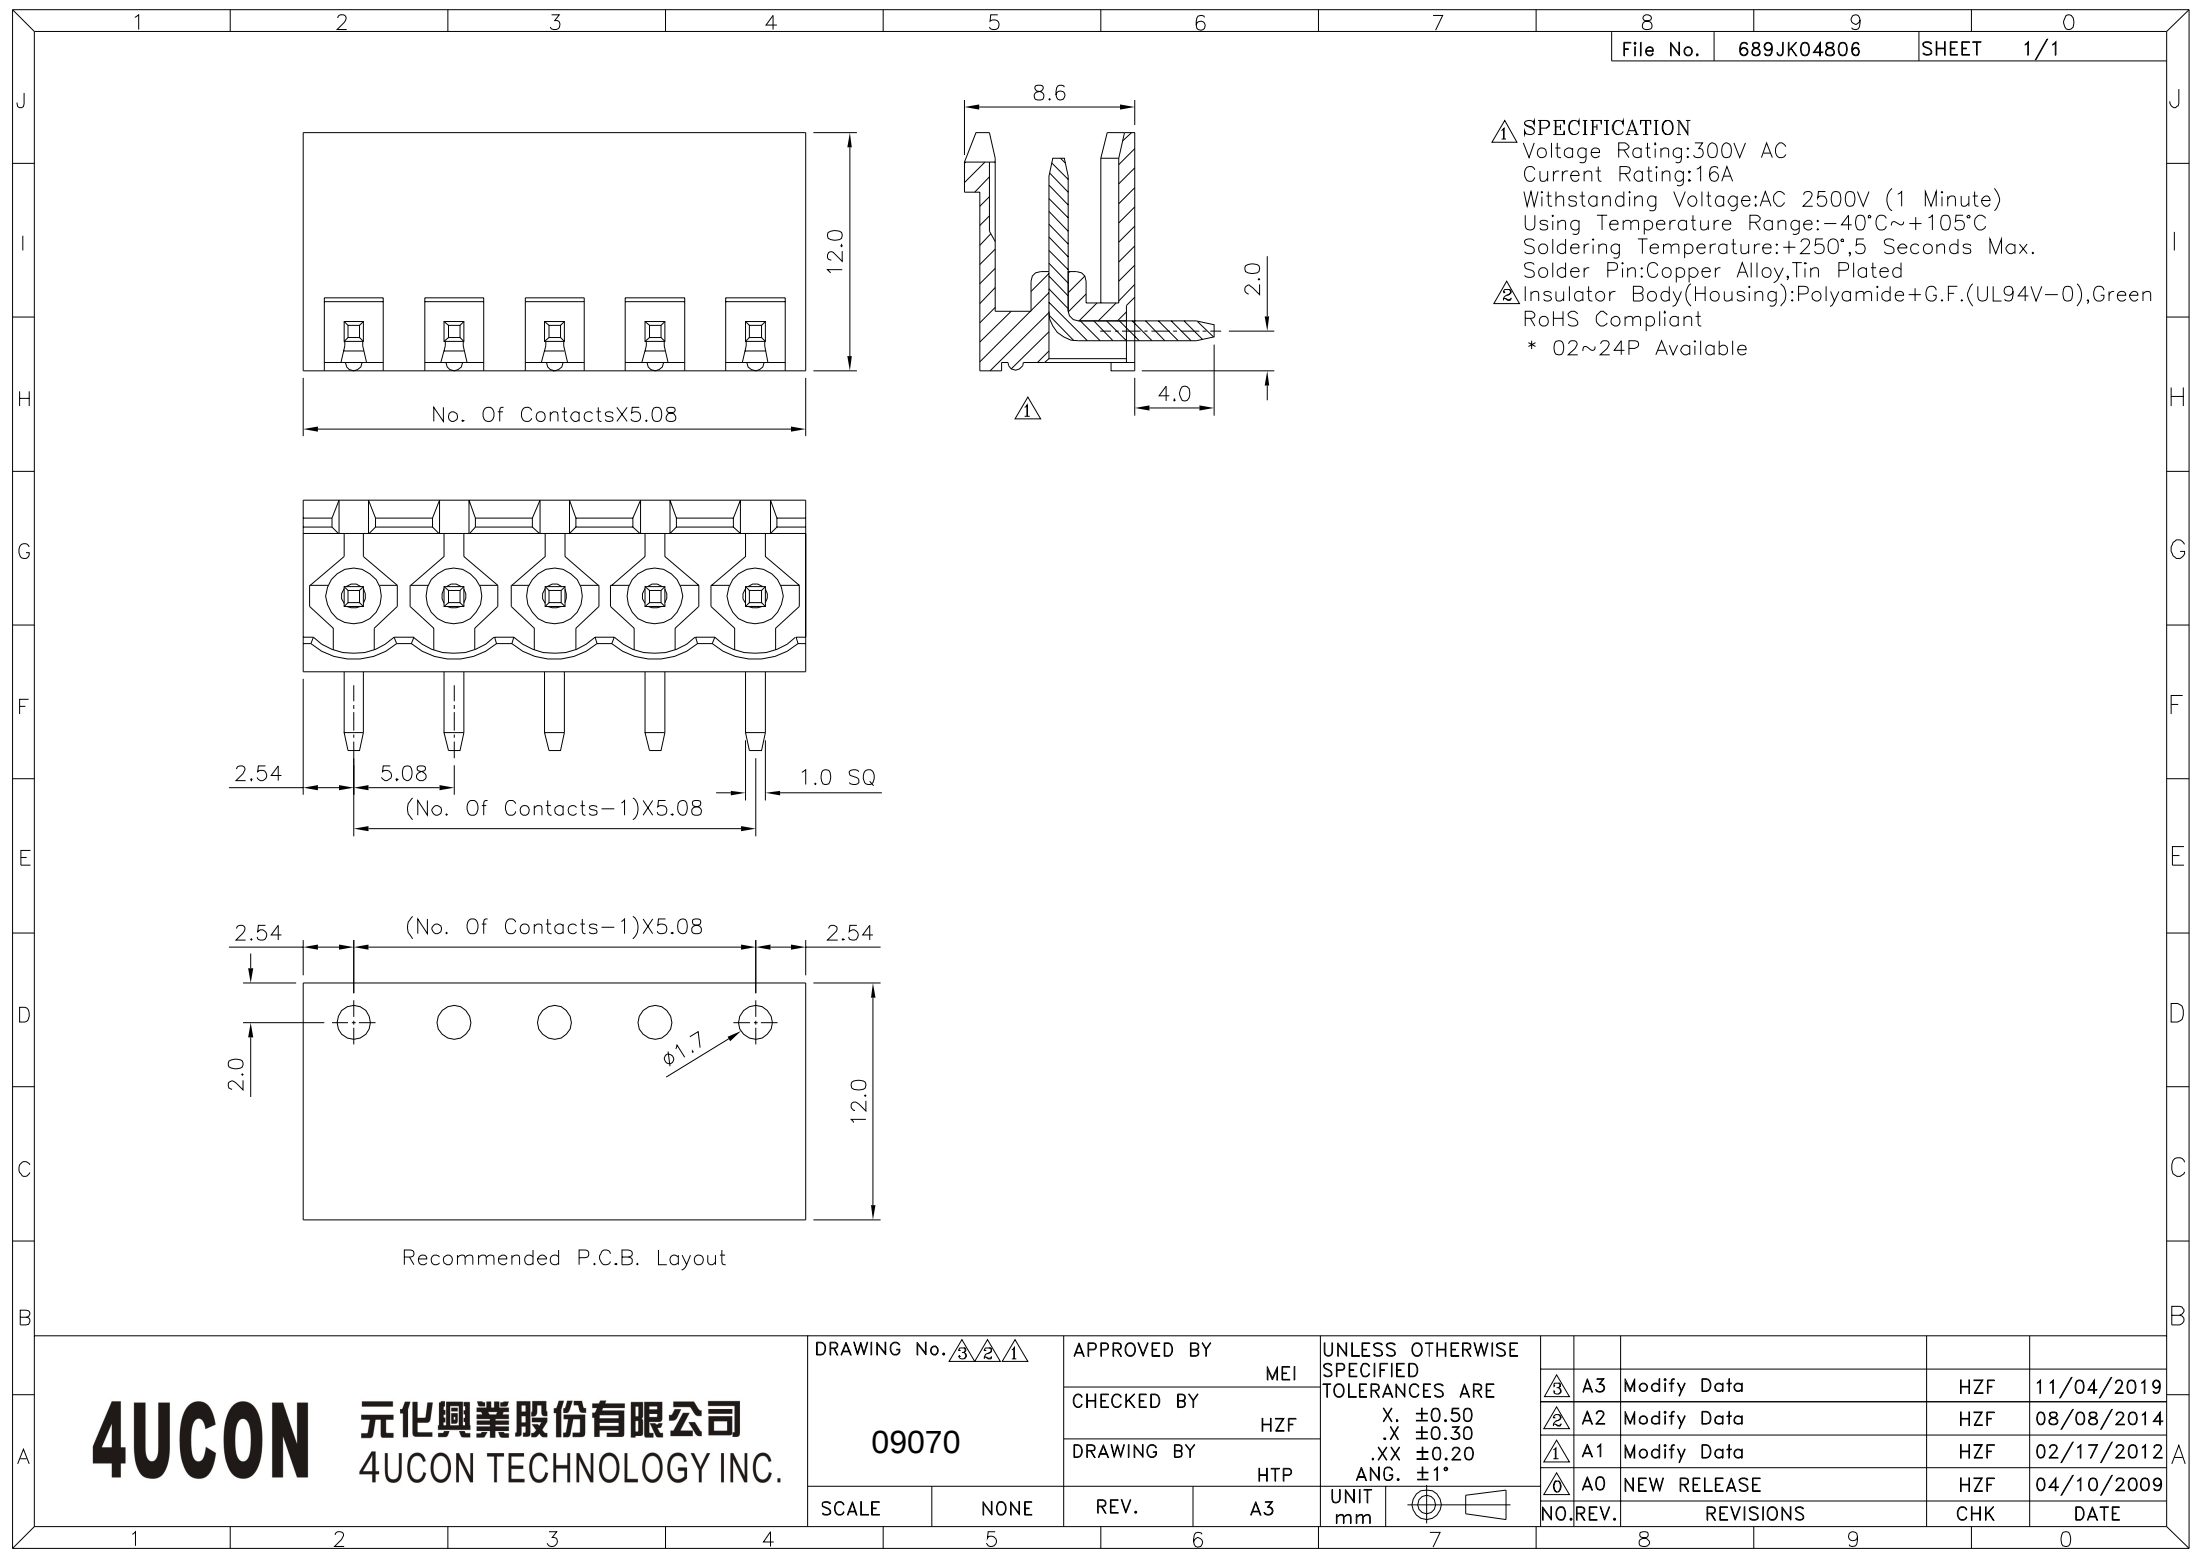

△ SPECIFICATION
Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:AC 2500V (1 Minute)
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~24P Available

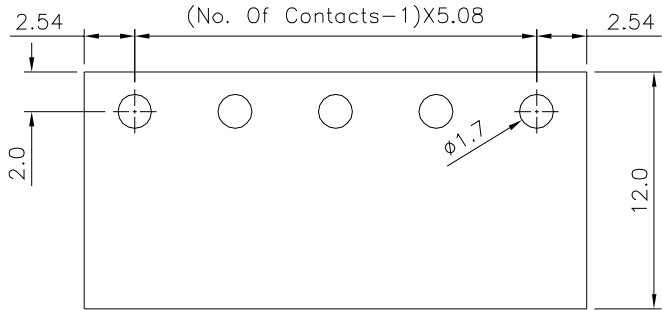

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 3/2/1

09070

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HTP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



3

A3

Modify Data

HZF

11/04/2019

2

A2

Modify Data

HZF

08/08/2014

1

A1

Modify Data

HZF

02/17/2012

0

A0

NEW RELEASE

HZF

04/10/2009

NO. REV.

REVISIONS

CHK

DATE