


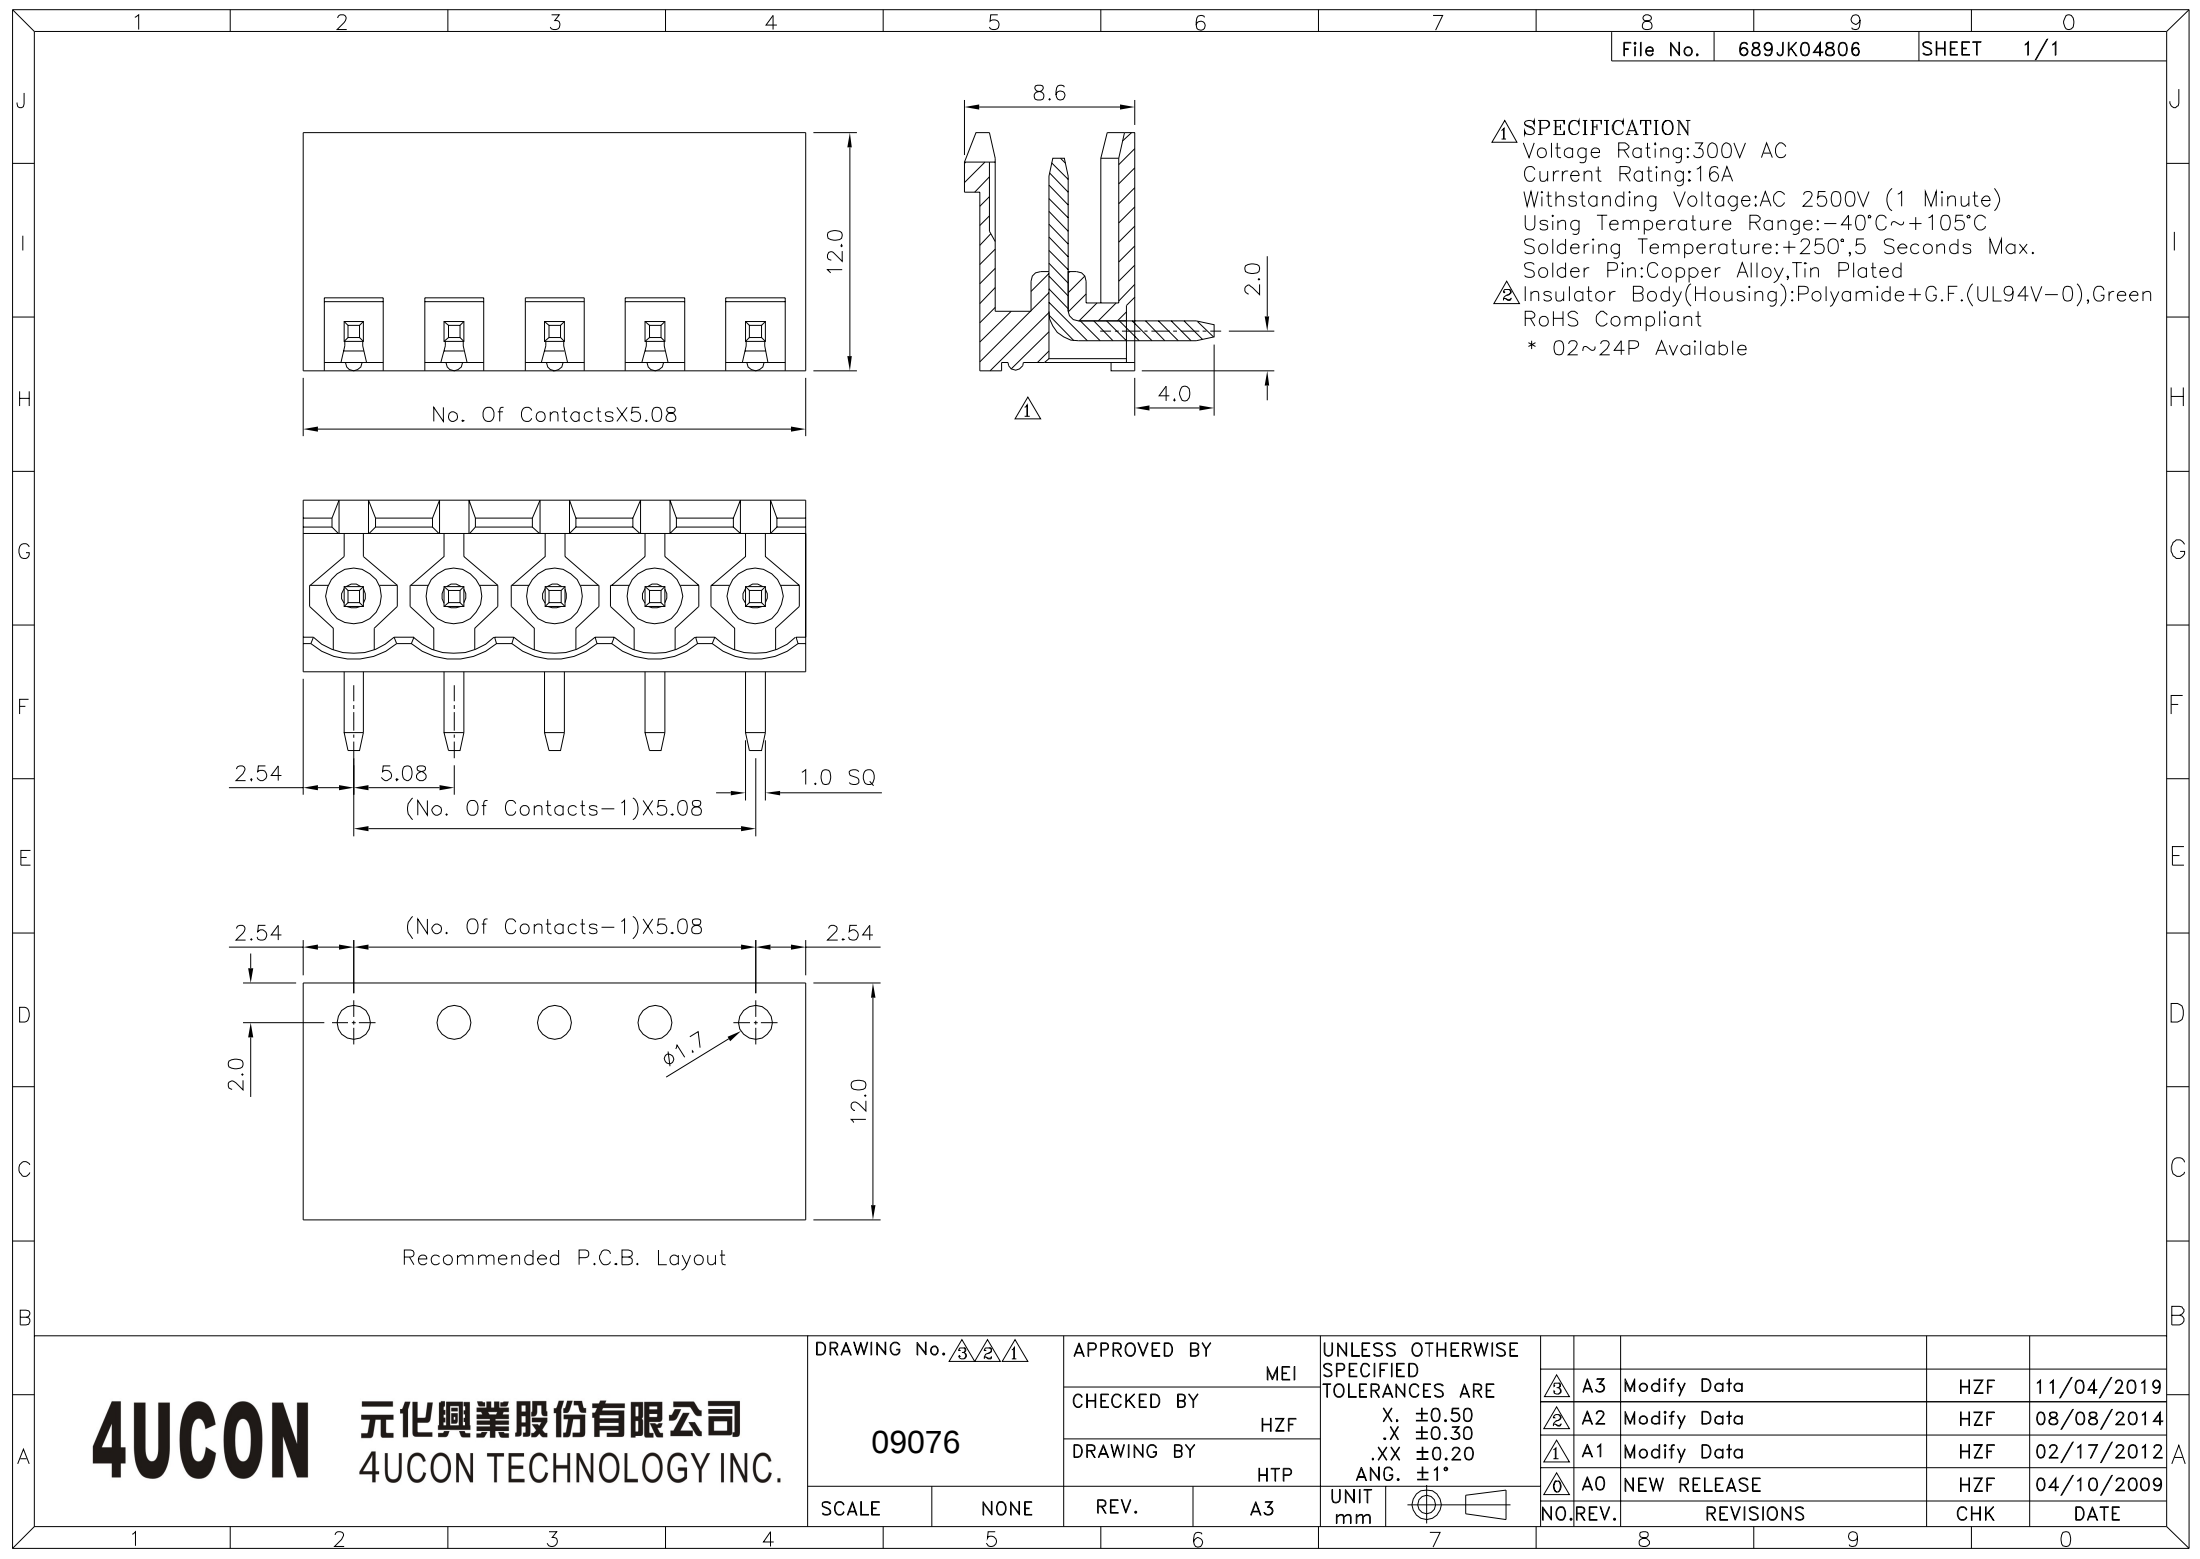

△ SPECIFICATION
Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:AC 2500V (1 Minute)
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~24P Available

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 3/2/1

09076

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HTP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/04/2019
2	A2	Modify Data	HZF	08/08/2014
1	A1	Modify Data	HZF	02/17/2012
0	A0	NEW RELEASE	HZF	04/10/2009