


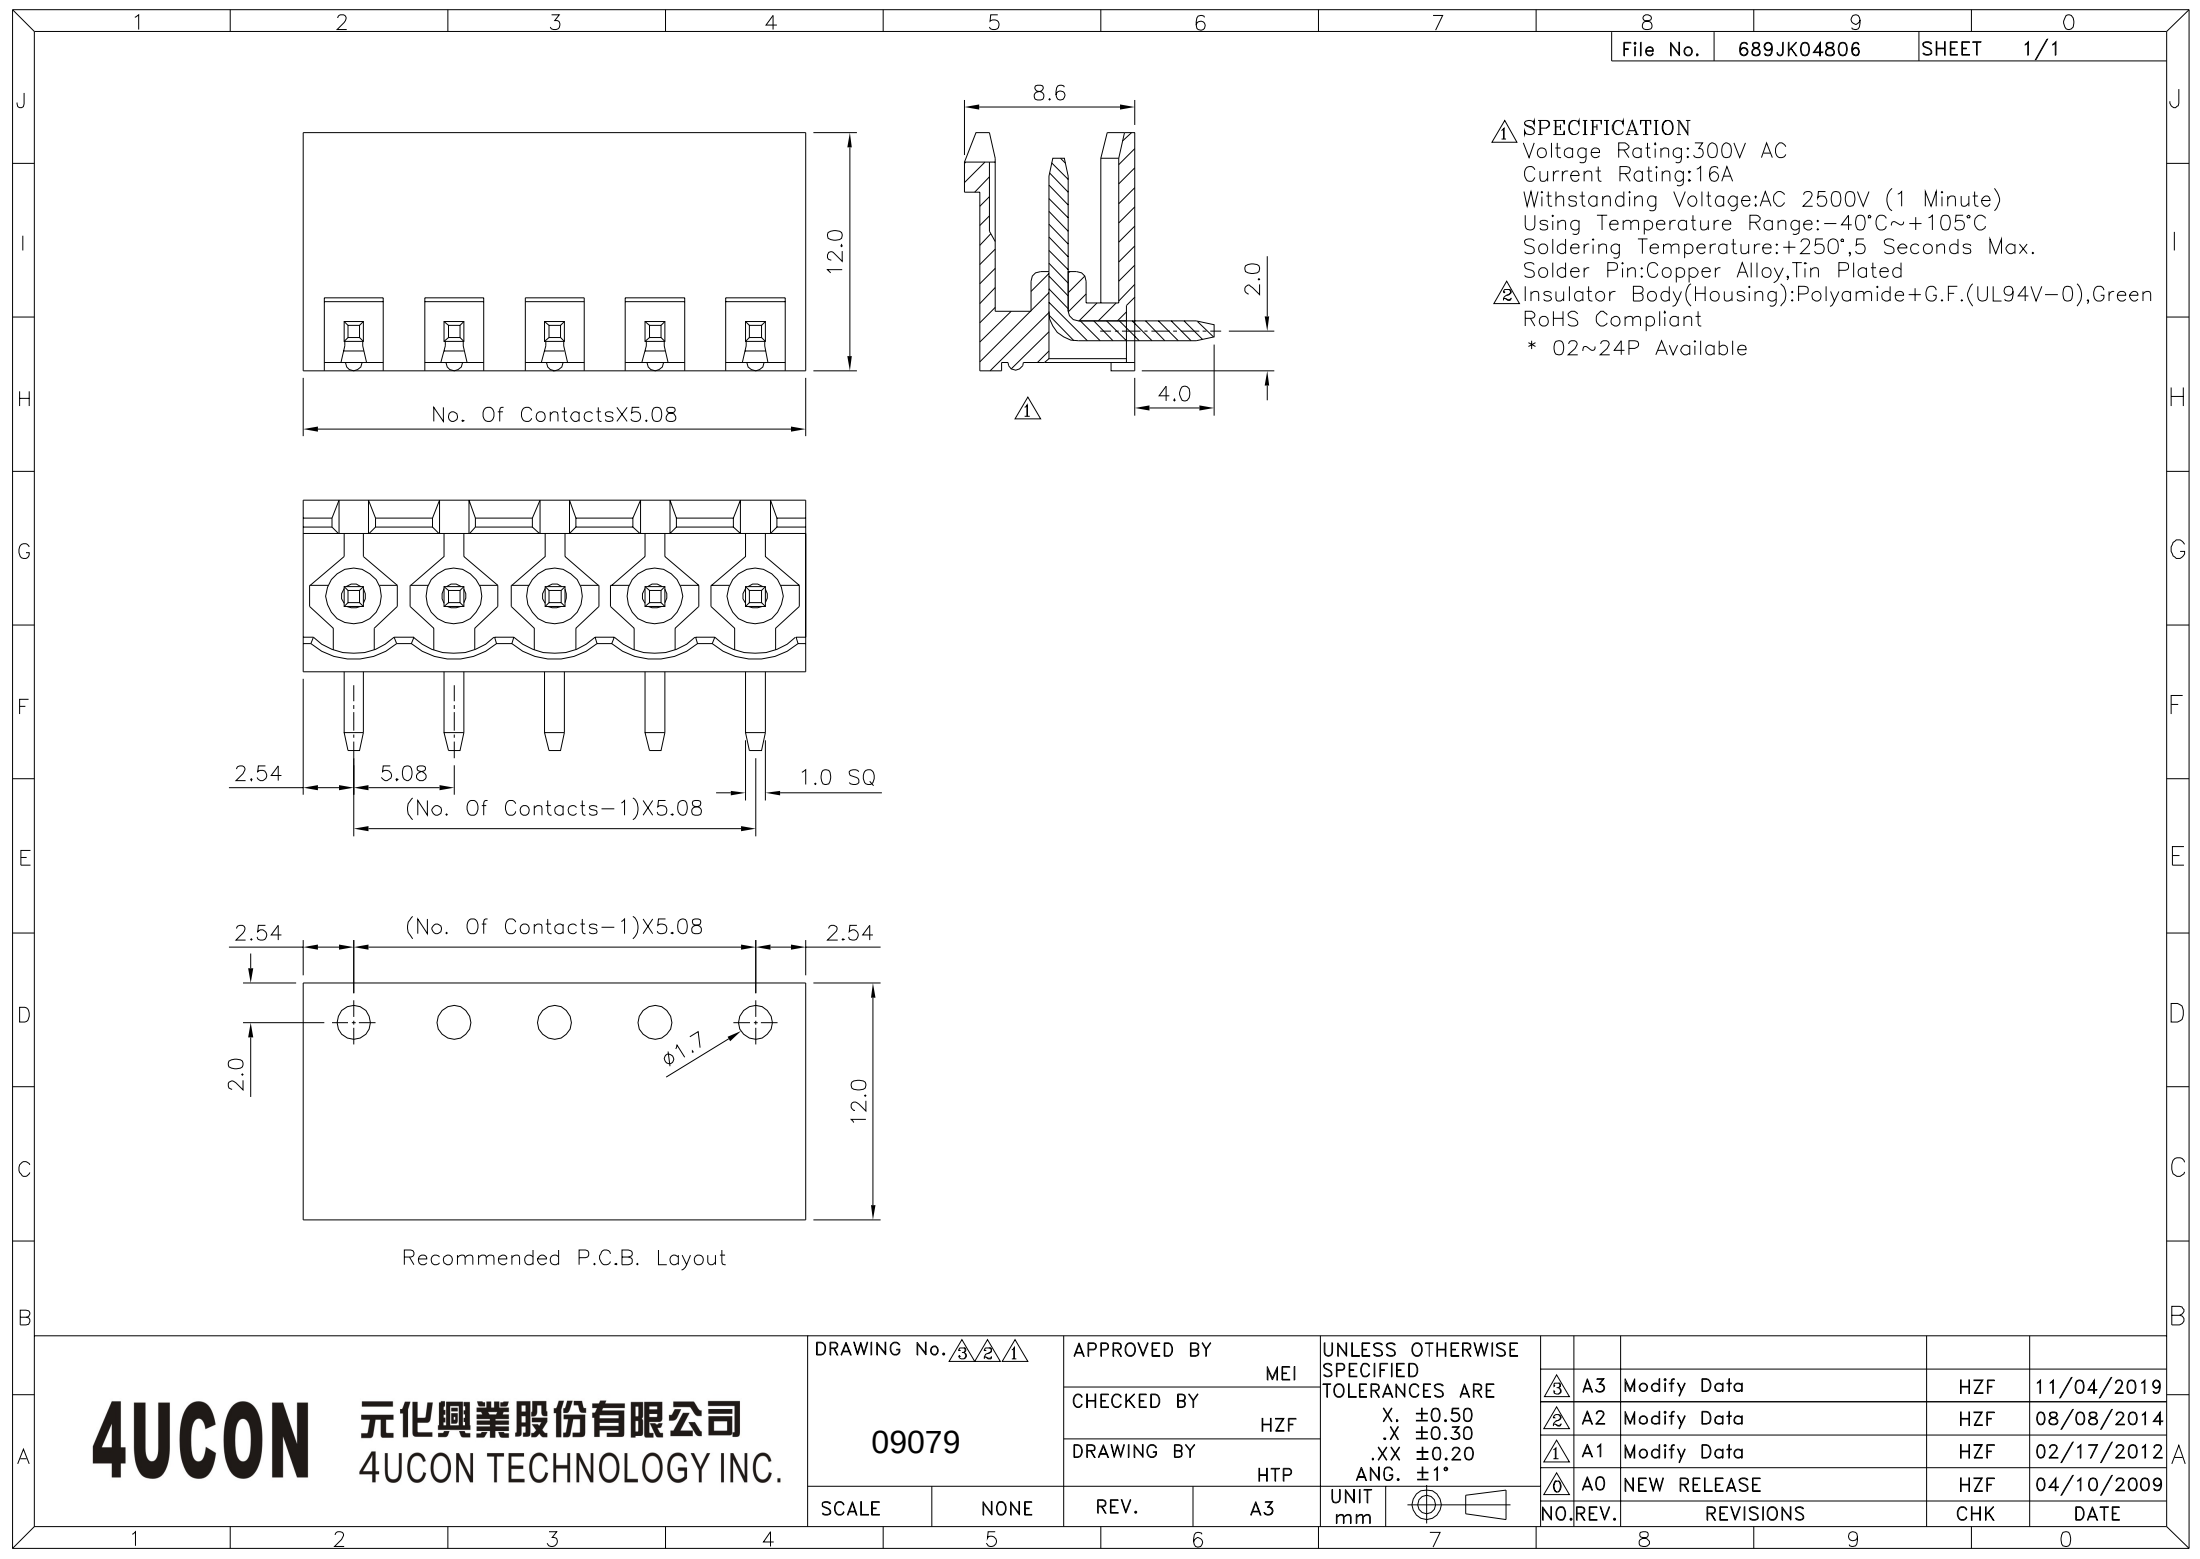

△ SPECIFICATION  
Voltage Rating:300V AC  
Current Rating:16A  
Withstanding Voltage:AC 2500V (1 Minute)  
Using Temperature Range:-40°C~+105°C  
Soldering Temperature:+250°,5 Seconds Max.  
Solder Pin:Copper Alloy,Tin Plated  
△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green  
RoHS Compliant  
\* 02~24P Available

**4Ucon** 元化興業股份有限公司  
4Ucon TECHNOLOGY INC.

DRAWING No. 3/2/1

09079

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY HTP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 3   | A3   | Modify Data | HZF | 11/04/2019 |
| 2   | A2   | Modify Data | HZF | 08/08/2014 |
| 1   | A1   | Modify Data | HZF | 02/17/2012 |
| 0   | A0   | NEW RELEASE | HZF | 04/10/2009 |

SCALE NONE

REV. A3

UNIT mm