


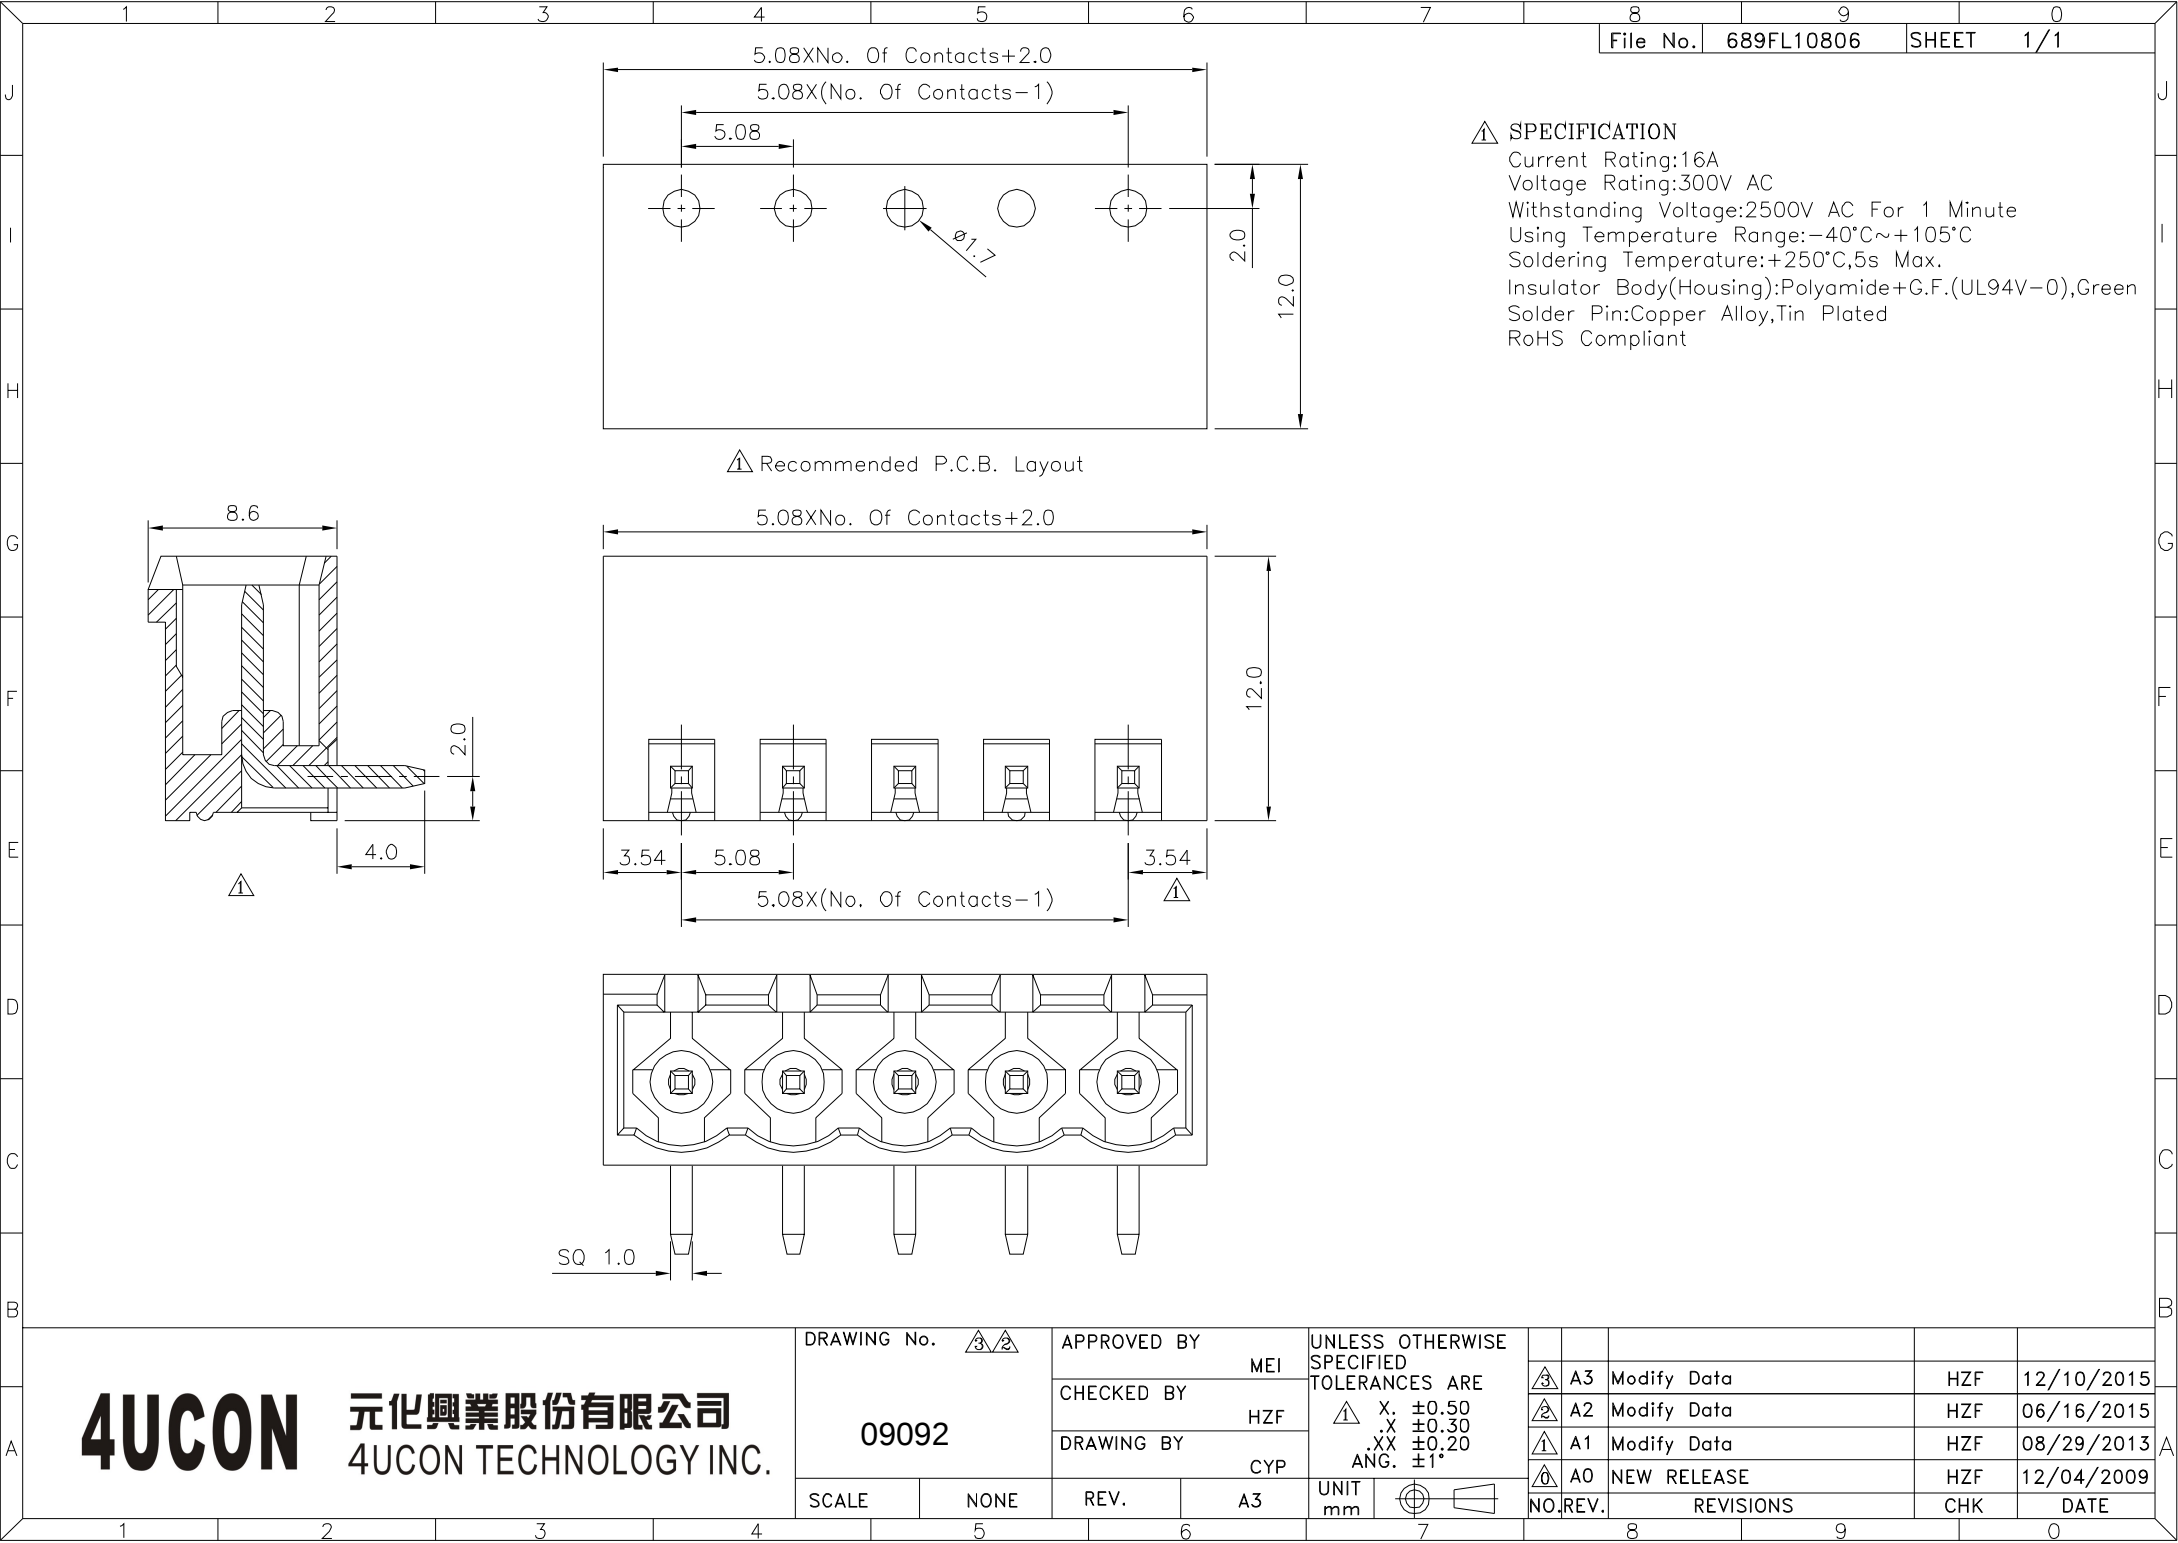

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△		APPROVED BY	
09092		MEI	
		CHECKED BY	HZF
		DRAWING BY	CYP
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
△ X.	±0.50	△ A3	Modify Data	HZF	12/10/2015
.X	±0.30	△ A2	Modify Data	HZF	06/16/2015
.XX	±0.20	△ A1	Modify Data	HZF	08/29/2013
ANG.	±1°	△ A0	NEW RELEASE	HZF	12/04/2009
UNIT	mm	NO.	REV.	REVISIONS	CHK
					DATE