
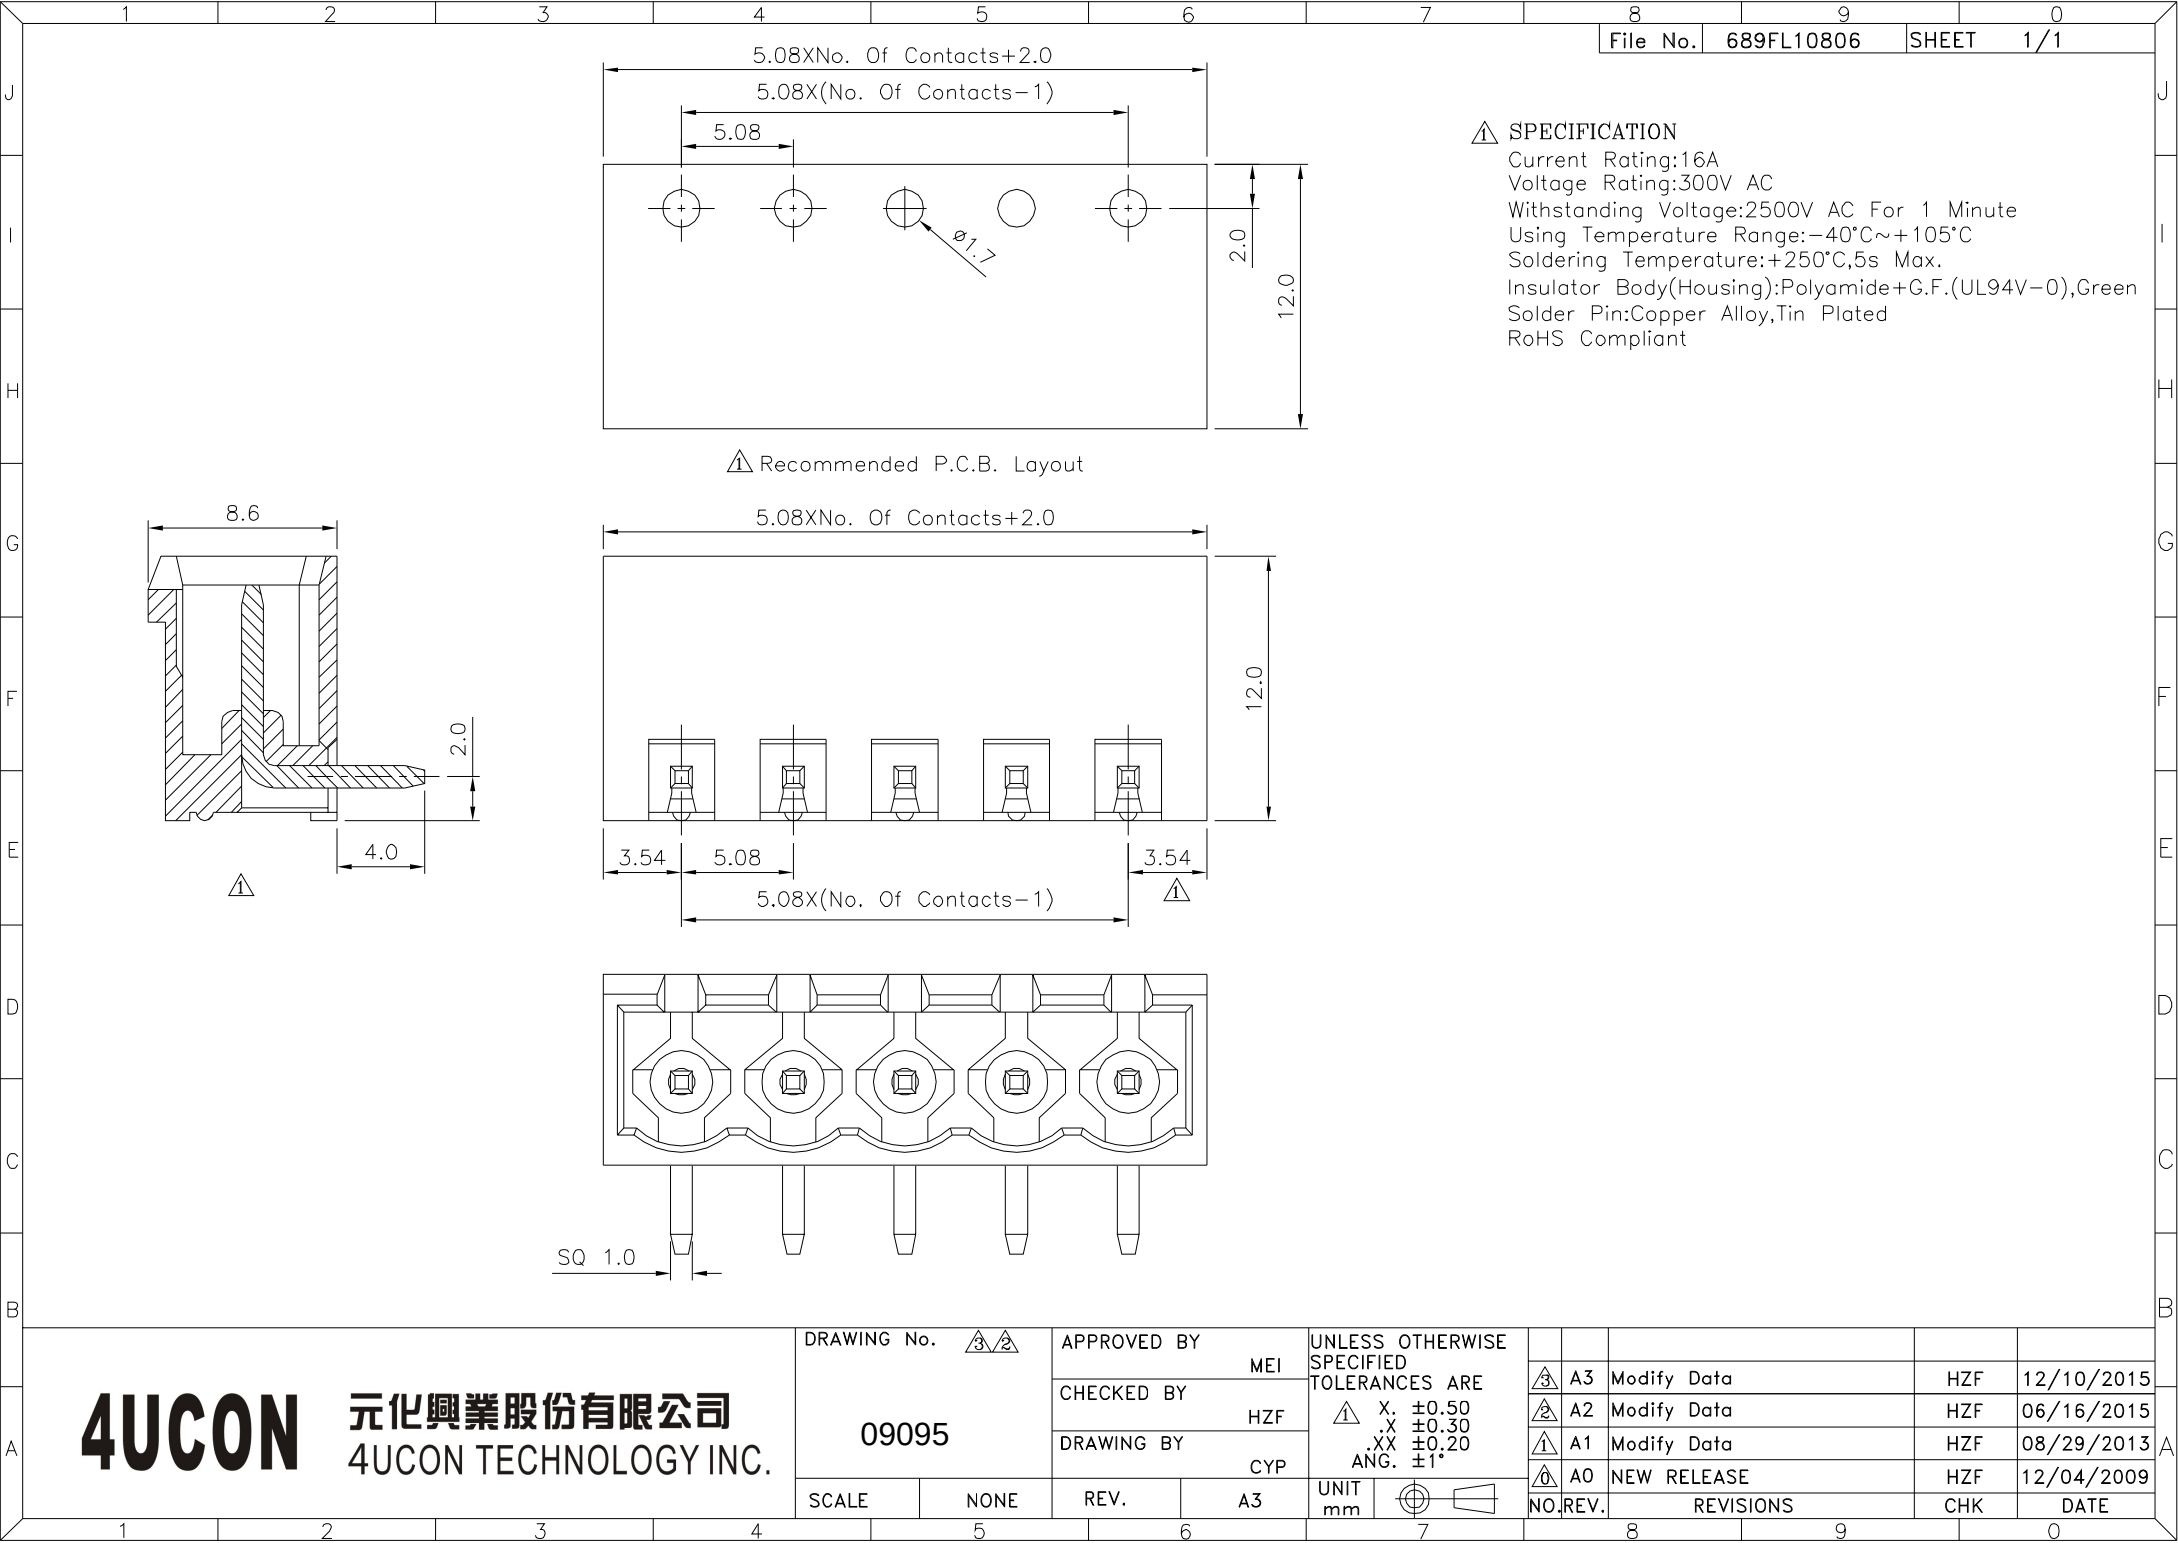




△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 		APPROVED BY	
		MEI	
		CHECKED BY	
09095		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°		UNIT	
		mm	
			
		NO. REV.	
		REVISIONS	
 A3	Modify Data	HZF	12/10/2015
 A2	Modify Data	HZF	06/16/2015
 A1	Modify Data	HZF	08/29/2013
 A0	NEW RELEASE	HZF	12/04/2009
		CHK	DATE