


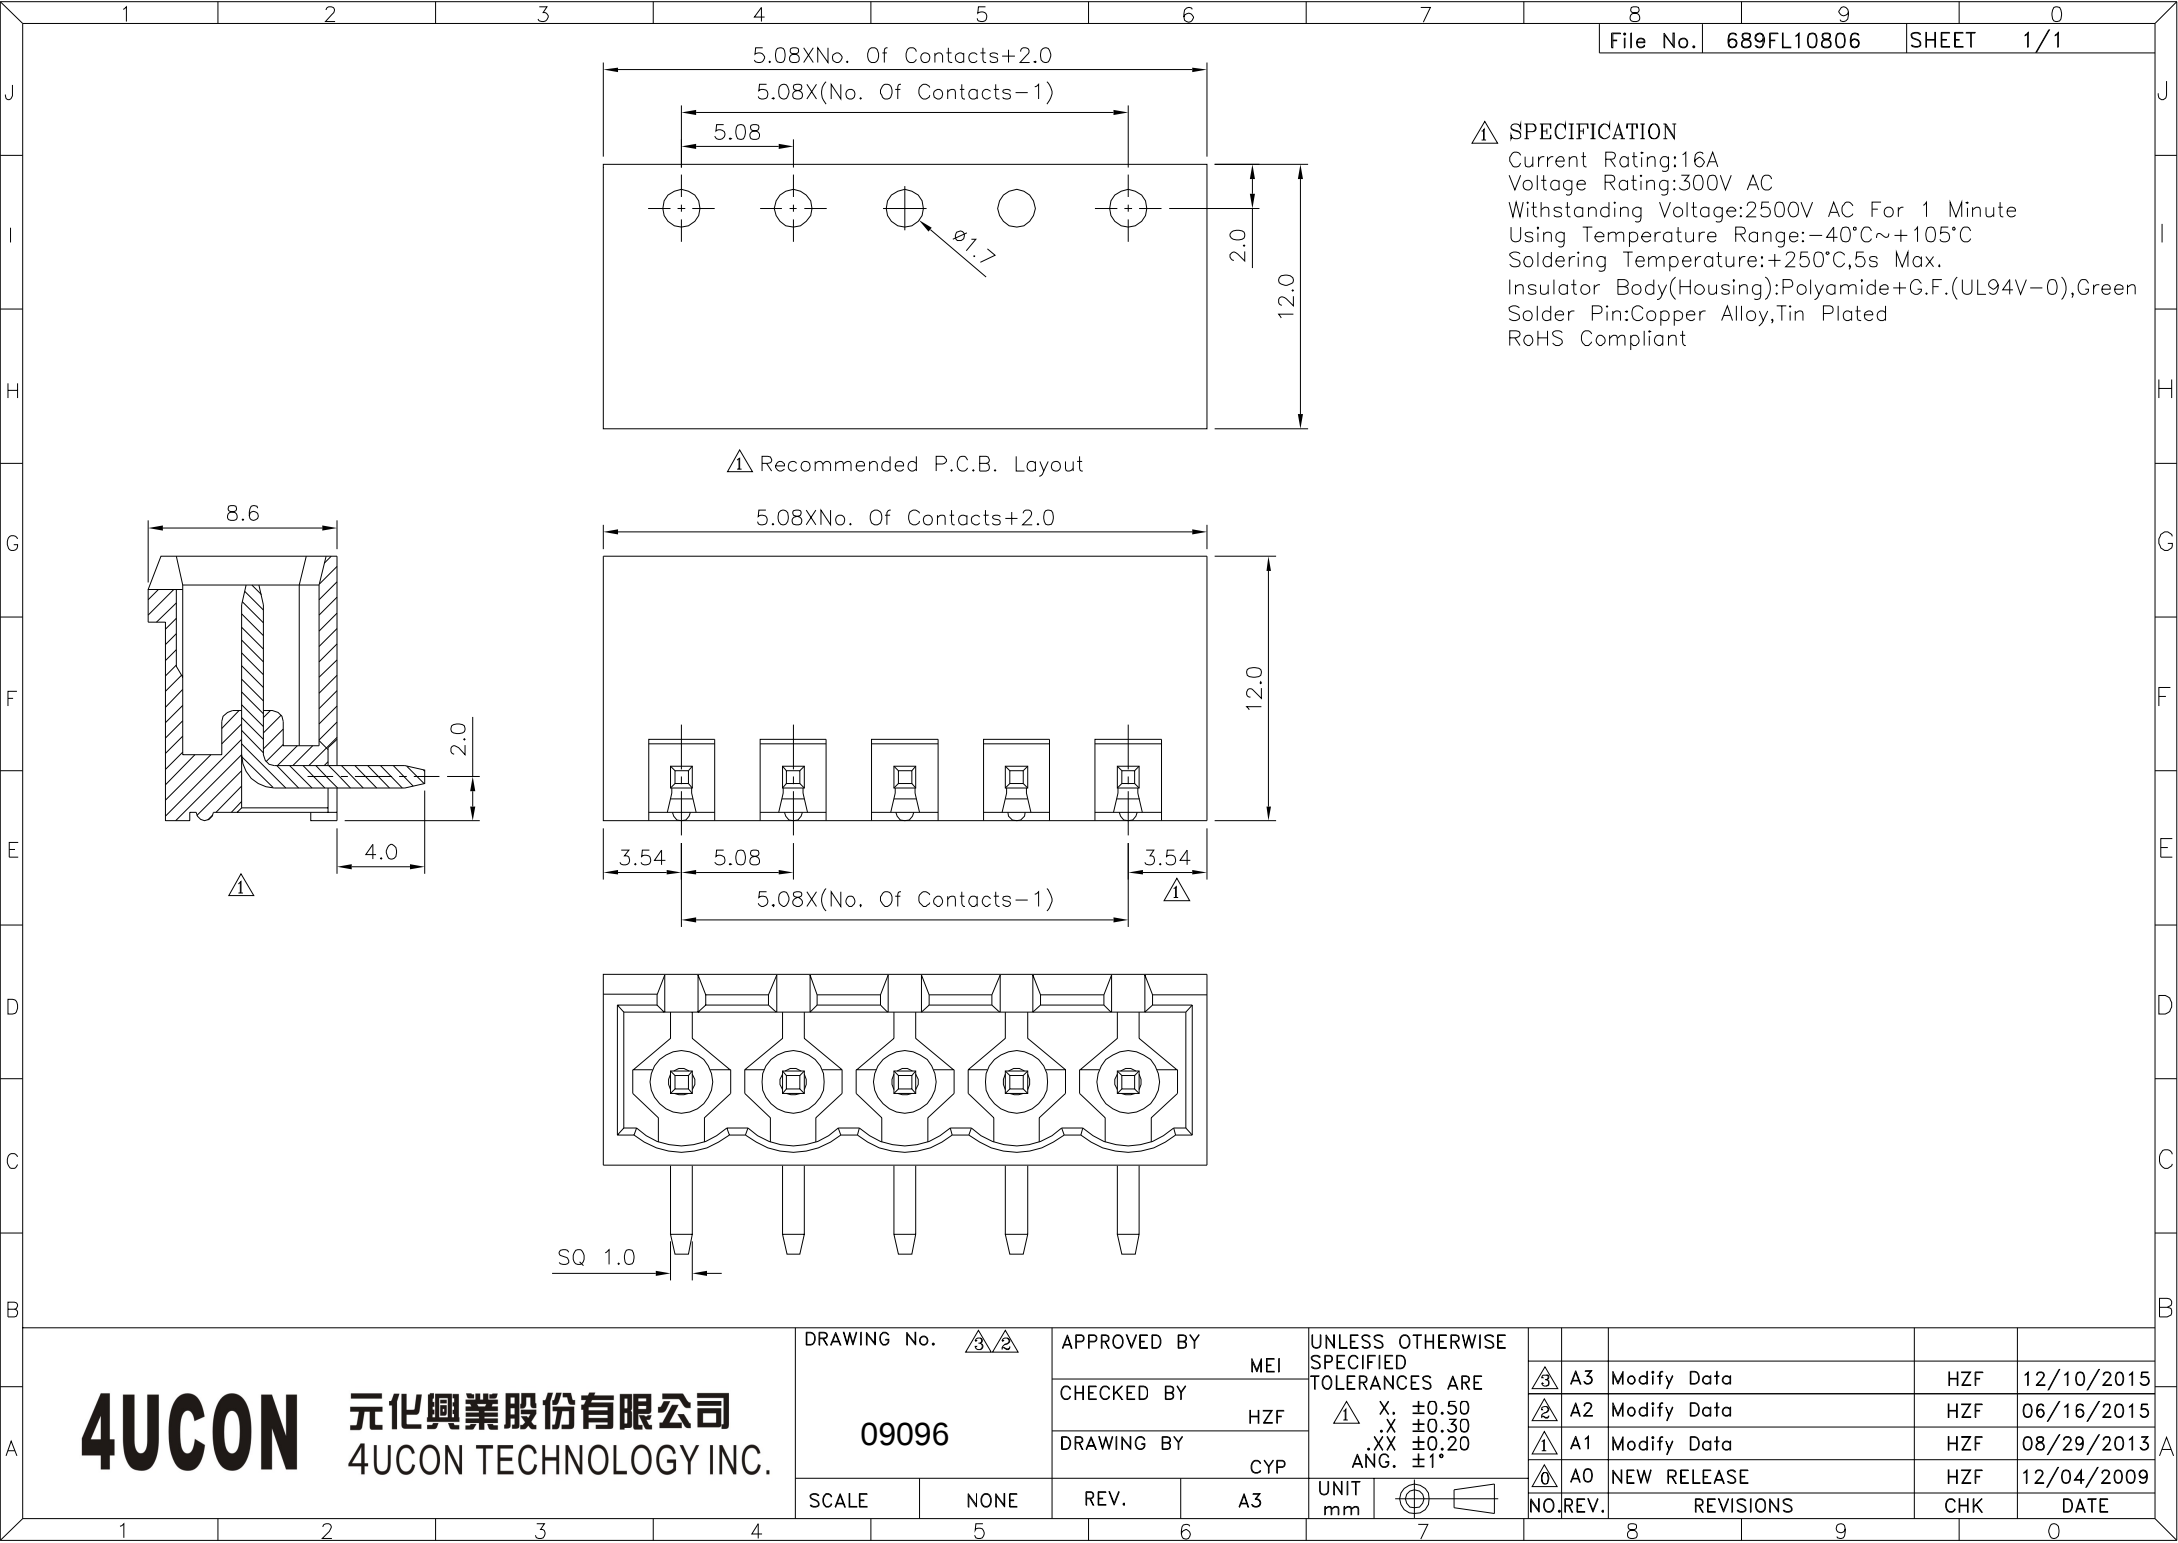

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
09096		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE						
△ X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°		③	A3	Modify Data	HZF	12/10/2015
		②	A2	Modify Data	HZF	06/16/2015
		①	A1	Modify Data	HZF	08/29/2013
		④	A0	NEW RELEASE	HZF	12/04/2009
UNIT	mm 	NO.	REV.	REVISIONS	CHK	DATE