


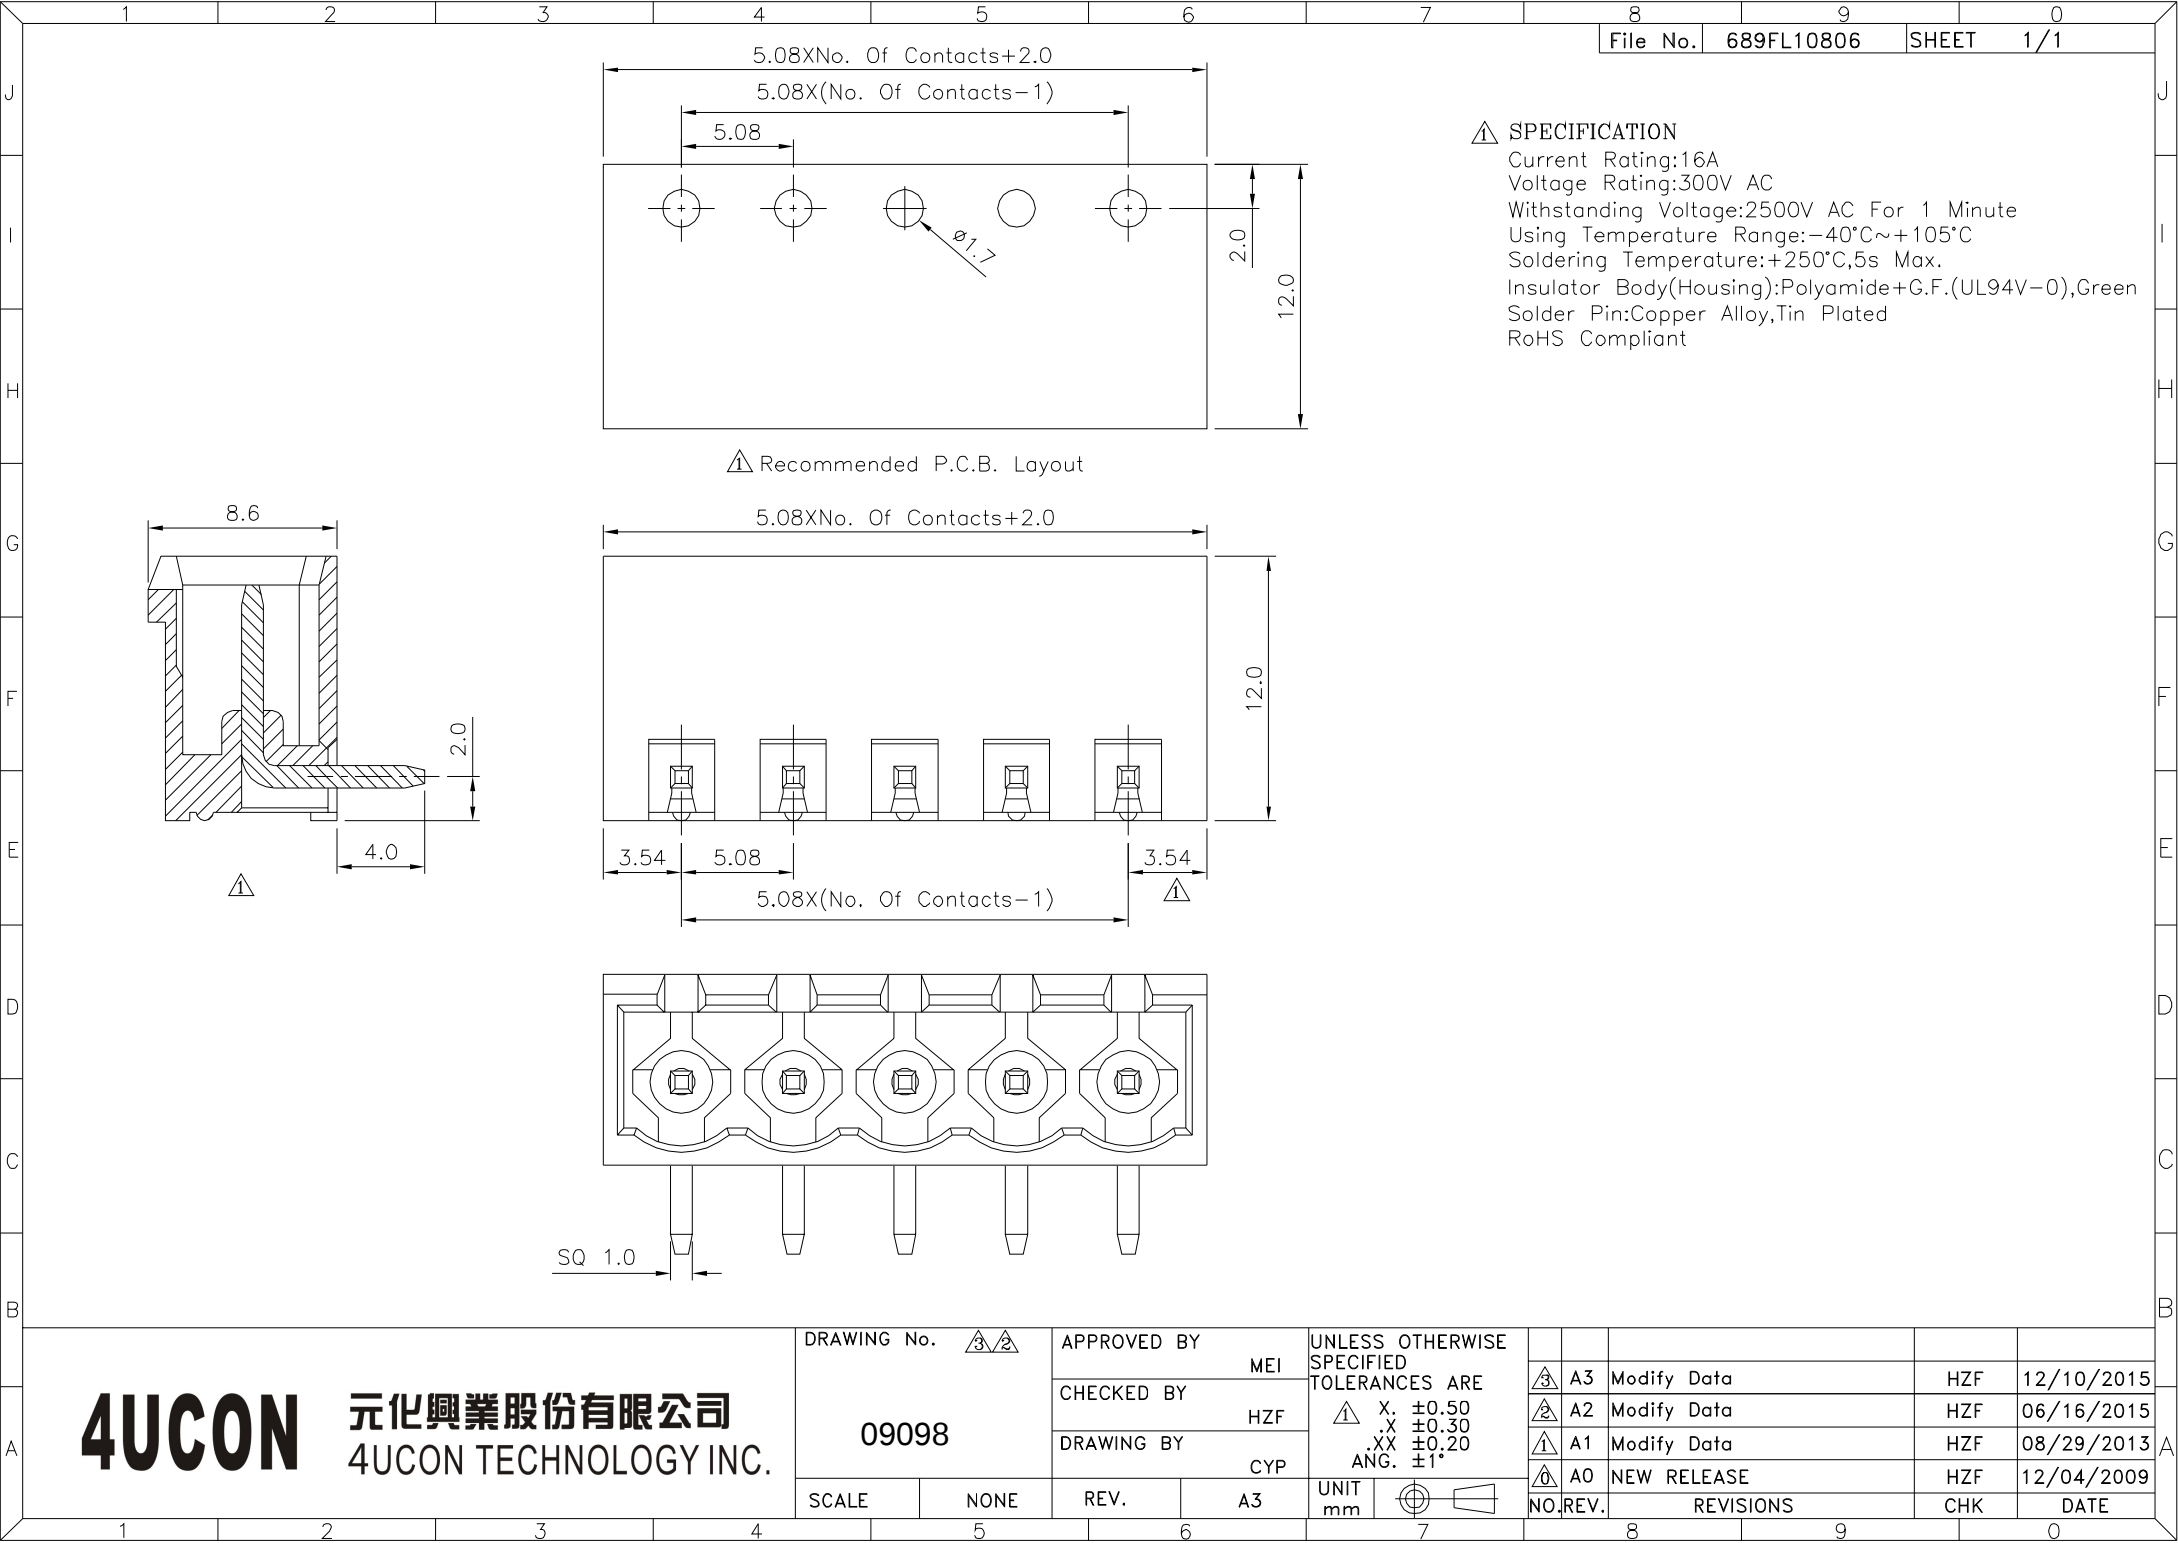


△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

△ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 		APPROVED BY	
		MEI	
		CHECKED BY	
09098		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°		UNIT	
		mm	
			
		NO. REV.	
		REVISIONS	
		CHK	DATE
 A3	Modify Data	HZF	12/10/2015
 A2	Modify Data	HZF	06/16/2015
 A1	Modify Data	HZF	08/29/2013
 A0	NEW RELEASE	HZF	12/04/2009