
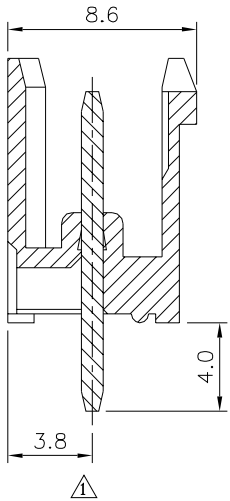
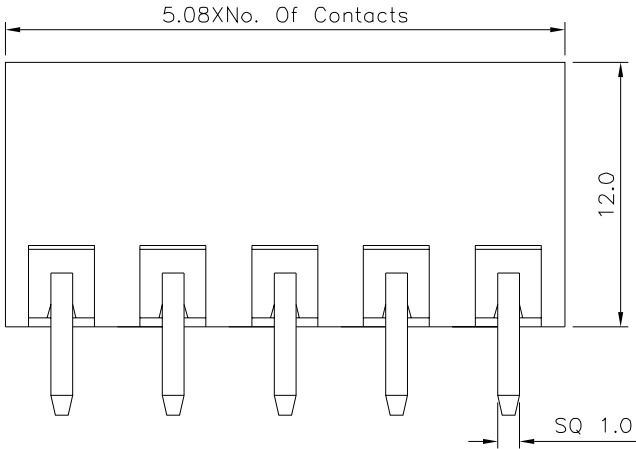


Recommended P.C.B. Layout

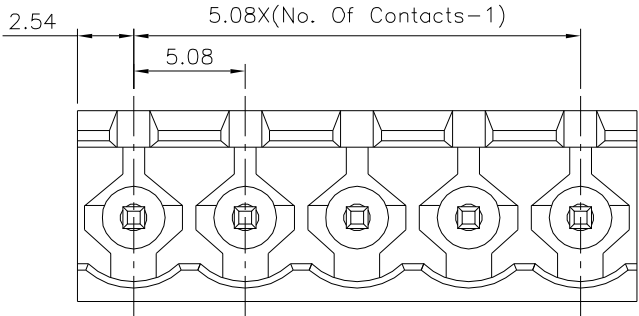

- △ SPECIFICATION**
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Solder Pin:Copper Alloy,Tin Plated
△ Insulator Body(Housing):Polyamide+G.F(UL94V-0),Green
△ RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. **09116**

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

SCALE NONE

REV. A3

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/02/2022
2	A2	Modify Data	HZF	09/24/2015
1	A1	Modify Data	HZF	06/07/2013
0	A0	NEW RELEASE	HZF	02/02/2010