
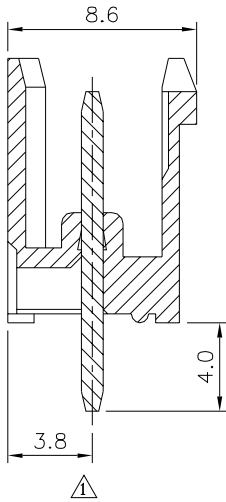
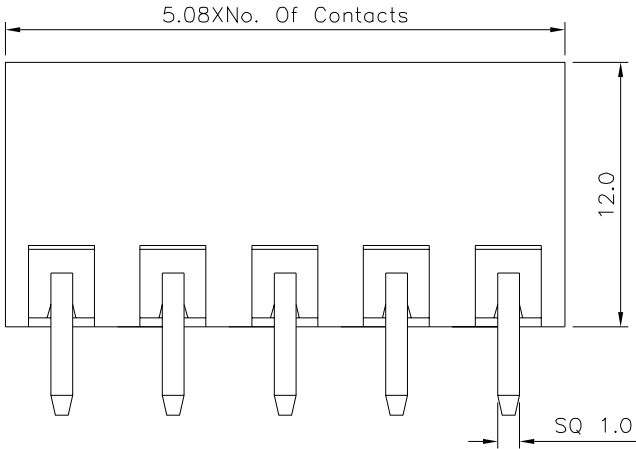


Recommended P.C.B. Layout

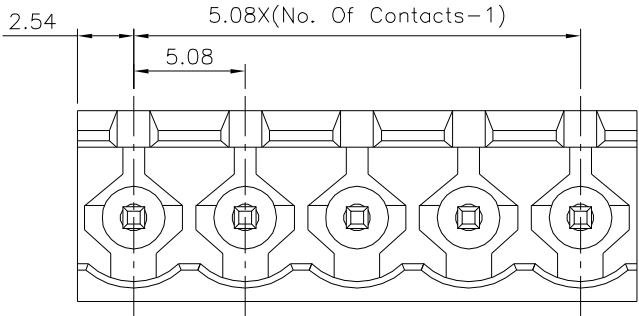

**△ SPECIFICATION**  
Current Rating:16A  
Voltage Rating:300V AC  
Withstanding Voltage:2500V AC 1 Minute  
Using Temperature Range:-40°C~+105°C  
Soldering Temperature:+250°C,5s Max.  
Solder Pin:Copper Alloy,Tin Plated  
**△ Insulator Body(Housing):**Polyamide+G.F(UL94V-0),Green  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. **09122**

APPROVED BY  
EMILY  
CHECKED BY  
HZF  
DRAWING BY  
CYP

SCALE NONE REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°

UNIT mm

|     |      |             |     |            |
|-----|------|-------------|-----|------------|
|     |      |             |     |            |
| △3  | A3   | Modify Data | HZF | 11/02/2022 |
| △2  | A2   | Modify Data | HZF | 09/24/2015 |
| △1  | A1   | Modify Data | HZF | 06/07/2013 |
| △0  | A0   | NEW RELEASE | HZF | 02/02/2010 |
| NO. | REV. | REVISIONS   | CHK | DATE       |