
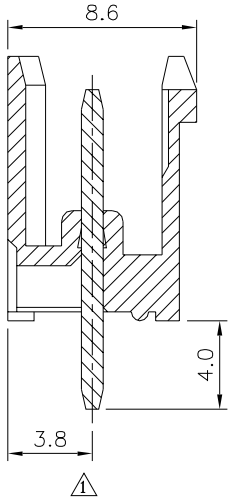
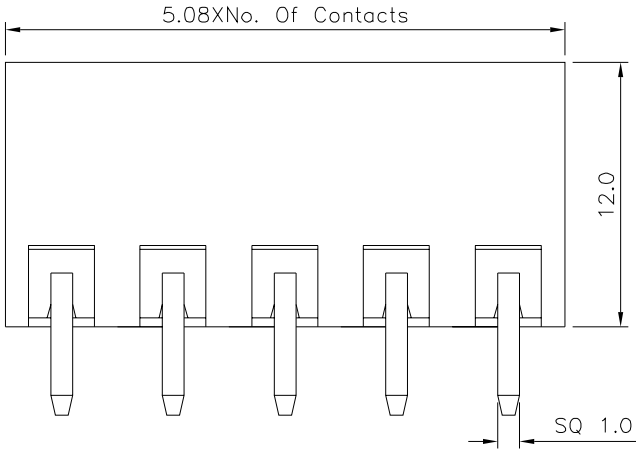


Recommended P.C.B. Layout

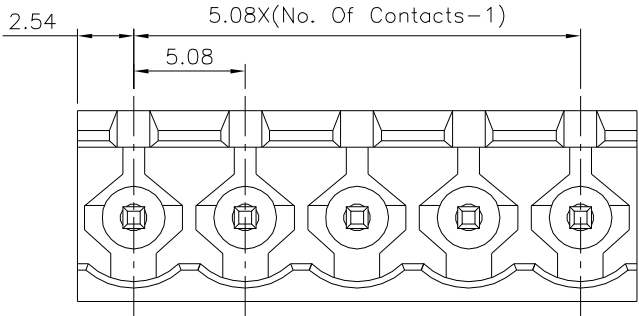

- ⚠

SPECIFICATION

Current Rating:16A

Voltage Rating:300V AC

Withstanding Voltage:2500V AC 1 Minute

Using Temperature Range:−40°C~+105°C

Soldering Temperature:+250°C,5s Max.

Solder Pin:Copper Alloy,Tin Plated
- ⚠

Insulator Body(Housing):Polyamide+G.F(UL94V−0),Green

RoHS Compliant

4UCON 元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No. 09124

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/02/2022
2	A2	Modify Data	HZF	09/24/2015
1	A1	Modify Data	HZF	06/07/2013
0	A0	NEW RELEASE	HZF	02/02/2010

SCALE NONE

REV. A3

UNIT mm

