




Recommended P.C.B. Layout

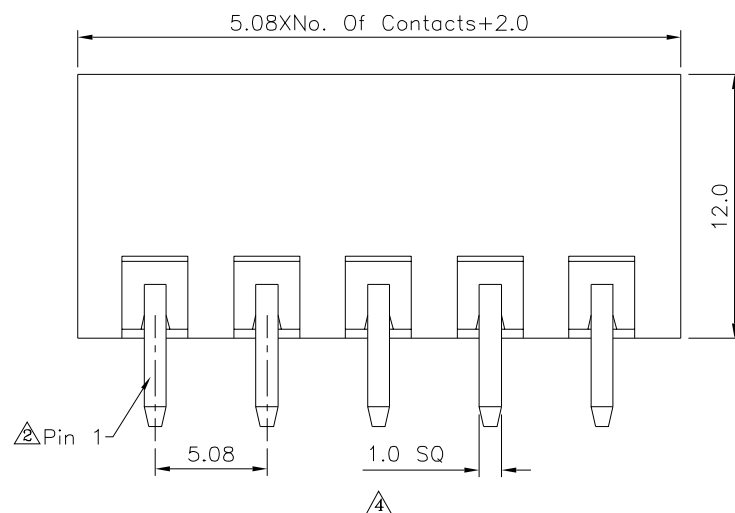

4

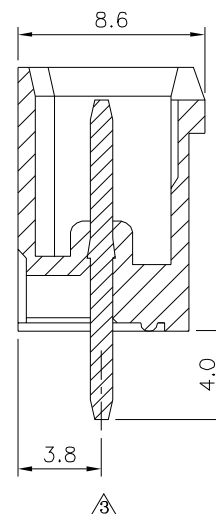

3

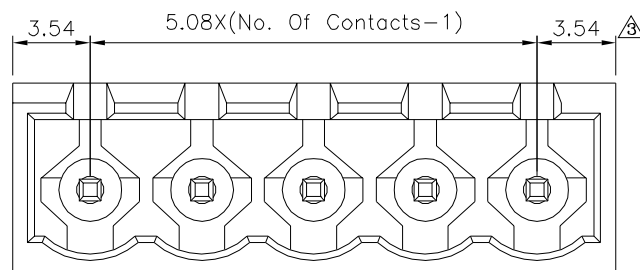

3

△ SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1Minute)
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Solder Pin:Copper Alloy,Tin Plated

△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

09139

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



△4	A4	Modify Data	HZF	12/05/2014
△3	A3	Modify Data	HZF	01/25/2013
△2	A2	Modify Data	HZF	11/22/2011
△1	A1	Modify Data	HZF	08/04/2011
△0	A0	NEW RELEASE	HZF	04/13/2009
NO.	REV.	REVISIONS	CHK	DATE