


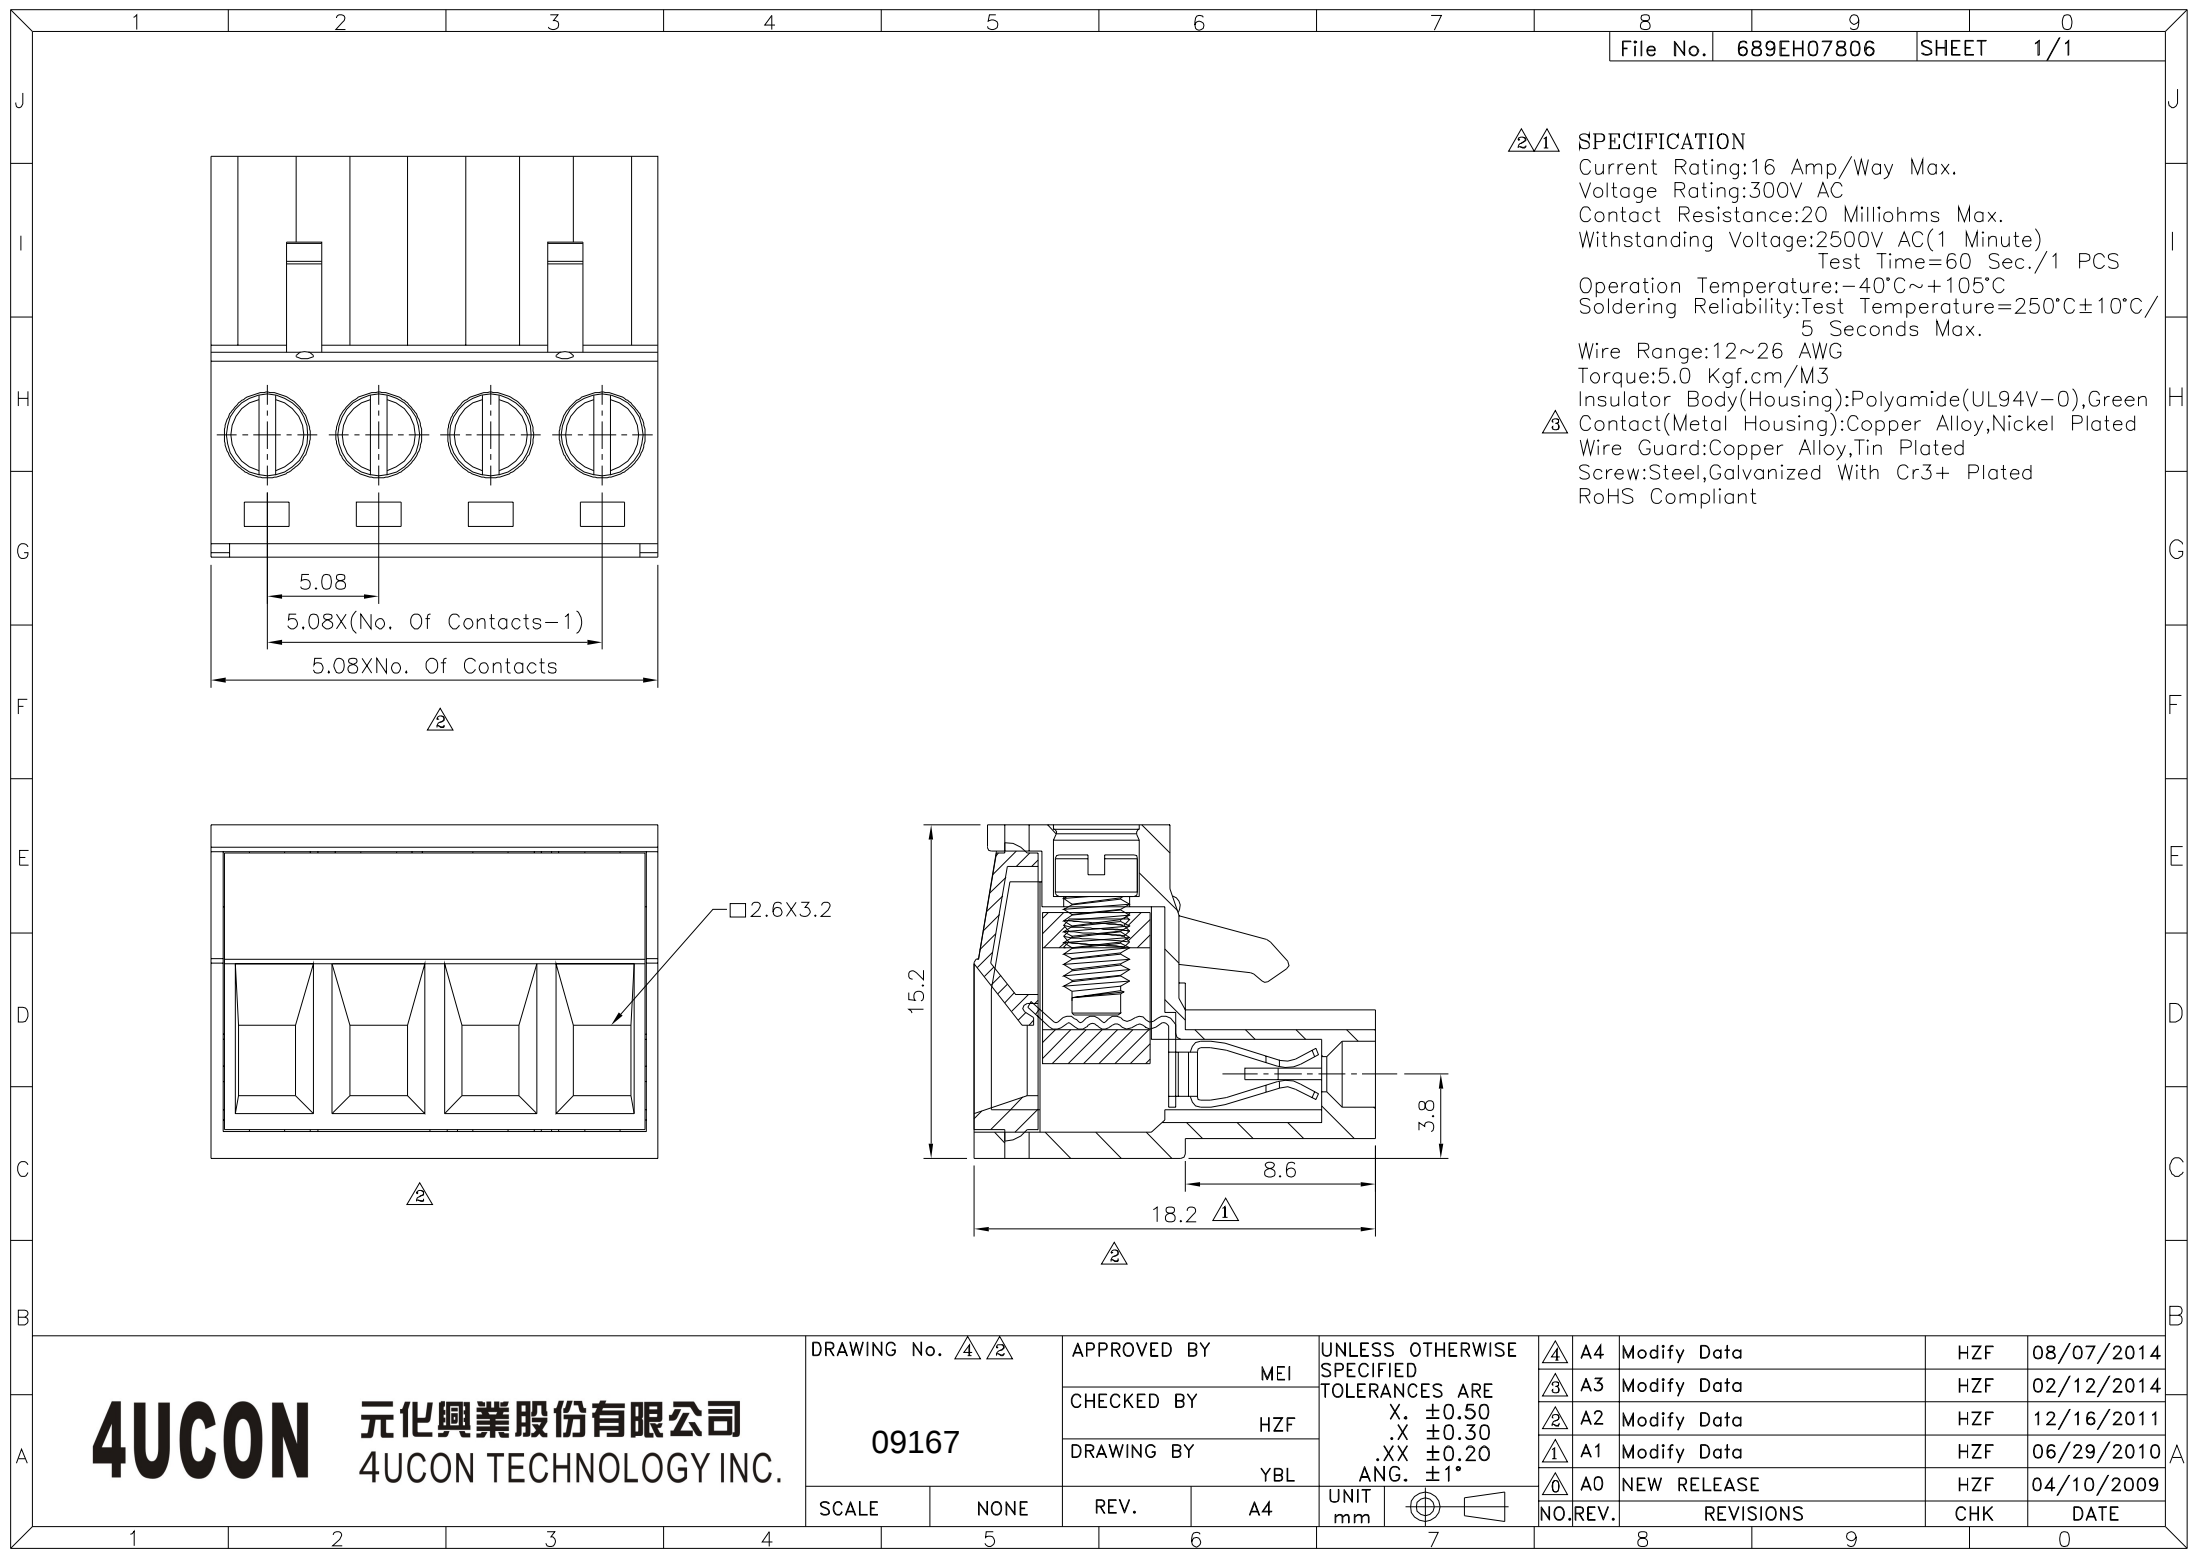

△△ SPECIFICATION
Current Rating:16 Amp/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec./1 PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C/
5 Seconds Max.
Wire Range:12~26 AWG
Torque:5.0 Kgf.cm/M3
Insulator Body(Housing):Polyamide(UL94V-0),Green
△ Contact(Metal Housing):Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △ △ 09167		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°		△ A4	Modify Data	HZF	08/07/2014	
		MEI				△ A3	Modify Data	HZF	02/12/2014	
		CHECKED BY				△ A2	Modify Data	HZF	12/16/2011	
		HZF				△ A1	Modify Data	HZF	06/29/2010	
		DRAWING BY				△ A0	NEW RELEASE	HZF	04/10/2009	
YBL		UNIT		mm		NO. REV.		REVISIONS	CHK	DATE
SCALE	NONE	REV.	A4							