
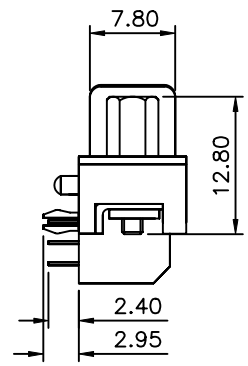
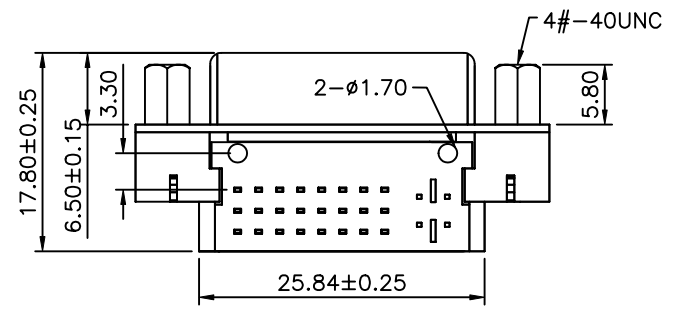


P.C.B Layout



**SPECIFICATION**

Insulation Resistance:1000Megohm Min  
 Contact Resistance:30Milliohms Max  
 Dielectric Voltage:500V DC  
 Temperature Range:-20°C~+85°C  
 Housing:PBT+30%GF White  
 Cover:PA66+30%GF White  
 Contact:Bronze,T=0.30 Nickel UnderPlated,  
 Gold Plated On Contact Area, Tin on Solder Area  
 Shell:SPCC,T=0.50, Nickel Plated Over Cu  
 Boardlock:SPCC,Tin Plated  
 Screw:Zinc Alloy  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.15 .XXX ±0.10 ANG:					
09402		MEI							
		CHECKED BY							
		HZF							
		DRAWING BY							
		JLT							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	02/22/2008
						NO.REV.	REVISIONS	CHK	DATE