

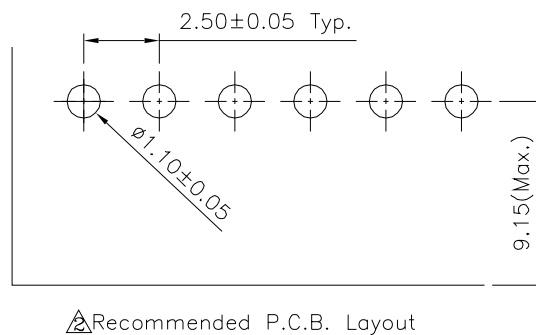
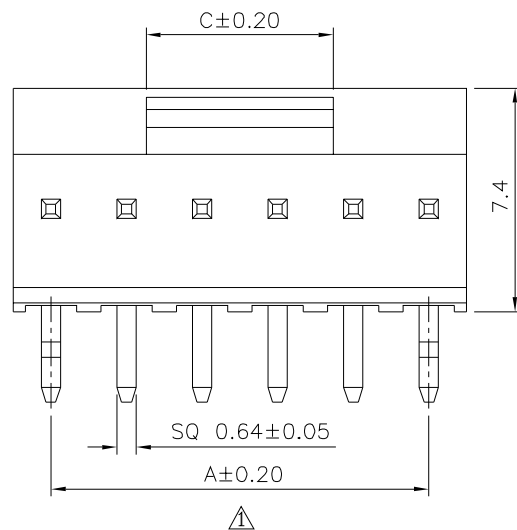


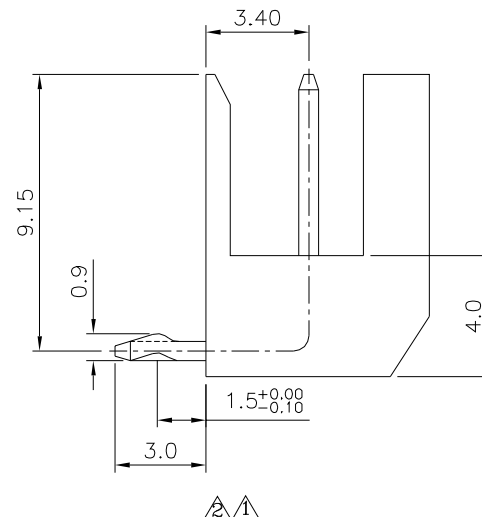

△ SPECIFICATION
 Insulator: PBT+30%G.F.(UL94V-0)
 Contact: Brass, Tin Plated
 RoHS Compliant

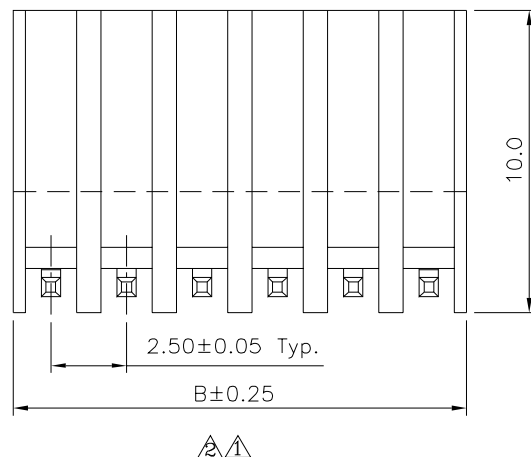

Pin	A	B	C
2	2.50	5.00	2.20
3	5.00	7.50	2.70
4	7.50	10.00	5.20
5	10.00	12.50	5.20
6	12.50	15.00	6.20
7	15.00	17.50	8.20
8	17.50	20.00	10.20
9	20.00	22.50	10.20
10	22.50	25.00	10.20
11	25.00	27.50	11.20
12	27.50	30.00	11.20
13	30.00	32.50	13.20
14	32.50	35.00	13.20

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09653

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 WZL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08


SCALE

NONE

REV.

A2

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
△A2	Modify Data	HZF	12/19/2023	
△A1	Modify Data	HZF	08/06/2010	
△A0	NEW RELEASE			