
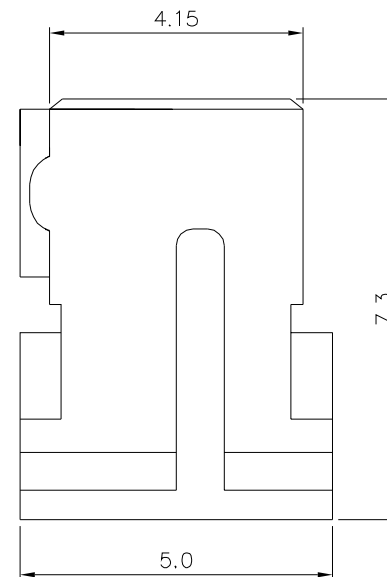
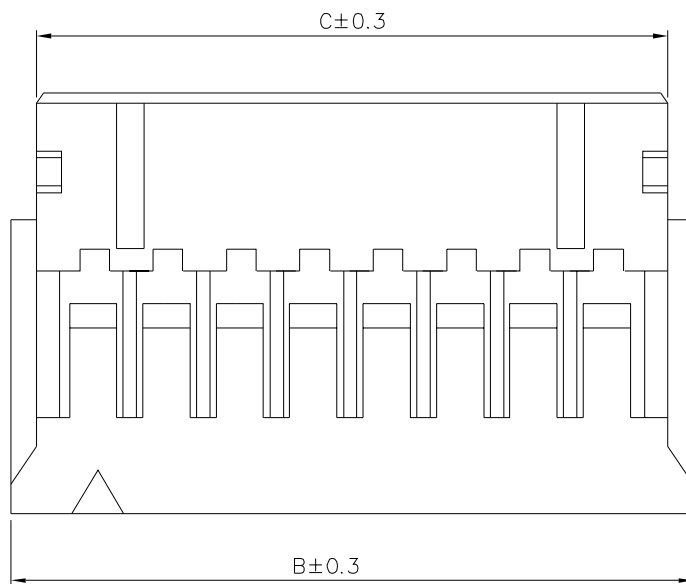


△ SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:800V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-40°C~+105°C
Insulator:PA66(UL94V-0),White
RoHS Compliant

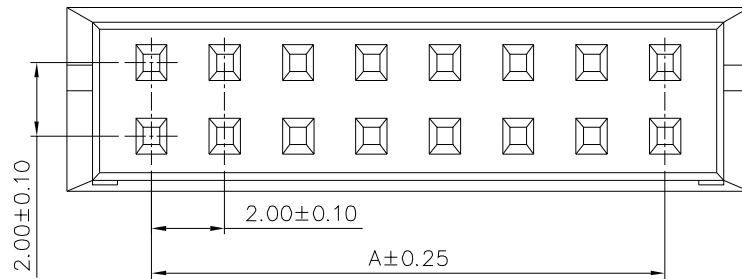

Pin	A	B	C
04	2.00	6.00	4.40
06	4.00	8.00	6.40
08	6.00	10.00	8.40
10	8.00	12.00	10.40
12	10.00	14.00	12.40
14	12.00	16.00	14.40
16	14.00	18.00	16.40
18	16.00	20.00	18.40
20	18.00	22.00	20.40
22	20.00	24.00	22.40
24	22.00	26.00	24.40
26	24.00	28.00	26.40
28	26.00	30.00	28.40
30	28.00	32.00	30.40
32	30.00	34.00	32.40
34	32.00	36.00	34.40
36	34.00	38.00	36.40
38	36.00	40.00	38.40
40	38.00	42.00	40.40
42	40.00	44.00	42.40
44	42.00	46.00	44.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09756

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.3	ANG. $\pm 2^\circ$
.XX	± 0.2	
.XXX	± 0.1	

UNIT	mm
------	----



△

	N	Δ	
--	---	---	--

	A1
---	----

0	AO
NO.REV	

Modify Data

NEW RELEASE

V.	REVISIONS
----	-----------

HZF

HZF

06/26/2021	
------------	--

09/26/2014

DATE
